

2112757

NEW

TC-P 261 005 USB 2.0 B mini Test connector for Mini USB




Max. Data rate	480 Mbit/s
Voltage	25 VAC / 60 VDC
Current	1,0 A at 25°C
R typ	<50 mOhm
Temperature	0°C...+50°C

Test connector for Mini USB (5 pole) for contacting Mini USB Interfaces.
Application in smaller Mini-USB devices like cameras, mobile phones, radios, hard disks etc.

Features:

- Report on Mini USB type B
- Smooth contact to test item (front view)
- Easy connection to test system with standard USB cable (rear view)
- Up to 200.000 contact cycles

Series	Pole count	Type
e.g. TC-P 261 005 USB 2.0 mini		
Holding device	Contact side	Version

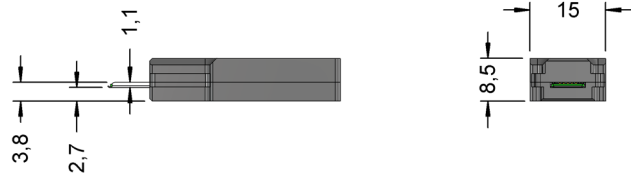

Front view






Rear view

2112261


Holding Device for Test Connector mUSB

Due to the centered seat of the test connector the holding device allows a parallel movement of the test connector and its connection.

- Floating-mounting of test connectors of $\pm 0,4$ mm in x- and y-direction
- A torsion angle of up to $1.8^\circ \pm 0.2^\circ$ is possible
- The holding device has a life cycle of more than 500.000 mechanical movements
- The holding device is fixed only by two screws at the upper and lower ends
- The test connector is attached to the holding device using only one locking screw

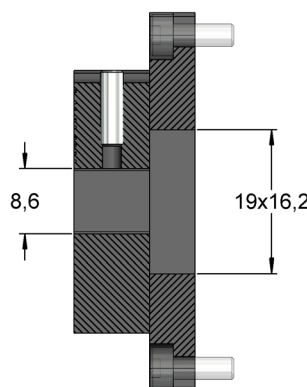

A-A

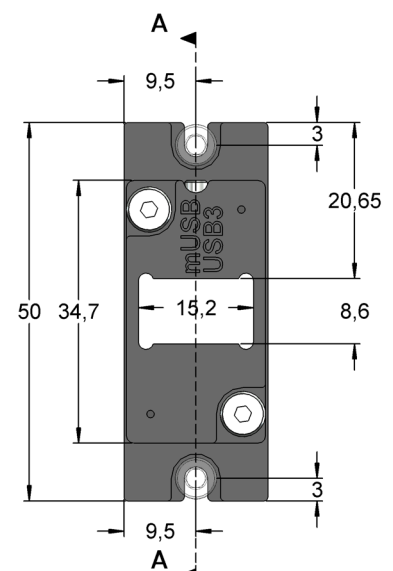

The threaded pin requires a hex wrench SW1,5.