


# HIGH-CURRENT CONNECTORS FOR E-MOBILITY

**NEW** with sense-contact and Finger protection check

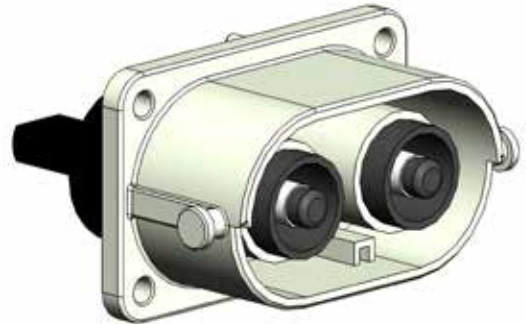

Contact	Connector	Contact probe	Current	Variant	Order number
<b>Pin Ø 4.0 mm e.g. Hirschmann HPS 40-2</b>					
			60 A	High current probe	HC09A52B100G08040
			60 A	High current probe with sense contact	HC09B52B100G08040
			60 A	High current probe with sense contact, Finger protection check	HC09G52B100G07040
<b>Socket Ø 4.0 mm e.g. Hirschmann HPS40-2</b>					
			100 A	High current probe with sense contact	HC08B11M100G09040
<b>Pin Ø 6.0 mm e.g. Amphenol HVSL-6000</b>					
			100 A	High current probe	HC10A52B240G12060
			100 A	High current probe with sense contact	HC10B52B240G12060
			100 A	High current probe with sense contact, Finger protection check	HC10G52B240G11060
<b>Socket Ø 6.0 mm e.g. Amphenol HVSL-6000</b>					
			100 A	High current probe with sense contact	HC11B11M240S13060