



## F340

### High Current Probe 157 mil with Continuous Plunger up to 16 A, Plug-in

<b>Centers (mm/mil)</b>	4,00 / 157
<b>Current</b>	16,0 A
<b>R typ</b>	<10 mOhm
<b>Temperature</b>	-45°C...+200°C (H)

#### Spring Force (cN ±20%)

Version	Preload	Nominal
Standard	80	260
Standard	150	400
Standard	300	540

#### Travel (mm)

Version	Nominal	Maximum
Standard	6,4	8,0
Pointing Accuracy	±0,10 mm	

#### Materials and Plating

Plunger	see Tip Style
Barrel	Bronze, unplated
Spring	Stainless steel, unplated
Receptacle	Bronze, gold plated

#### Accessories

Insertion tool receptacle	FEWZ-340E0
Insertion tool probe	FDWZ-100



#### Drill Size (mm)

F340	2,37 - 2,40
H340	2,68 - 2,69

#### Projection Height (mm)

H340 mit F340	22,5
---------------	------

The continuous plunger guarantees a low internal resistance and allows applications with high currents. The connection of the plunger should be realized by a flexible wire with sufficient space for the movement. The wire can also be soldered directly to the receptacle. However, this leads to a lower electrical performance.

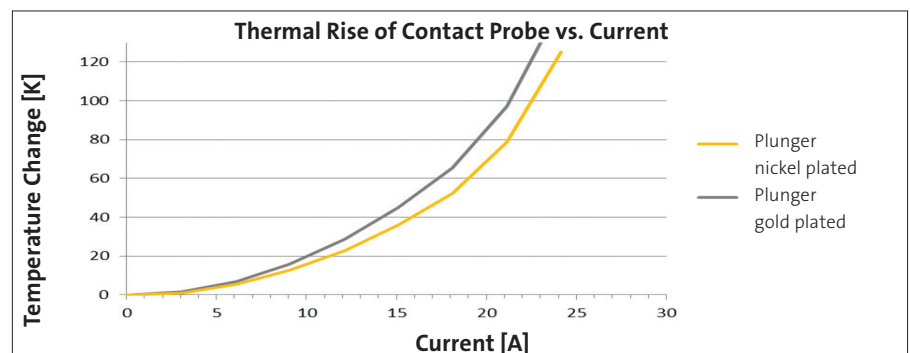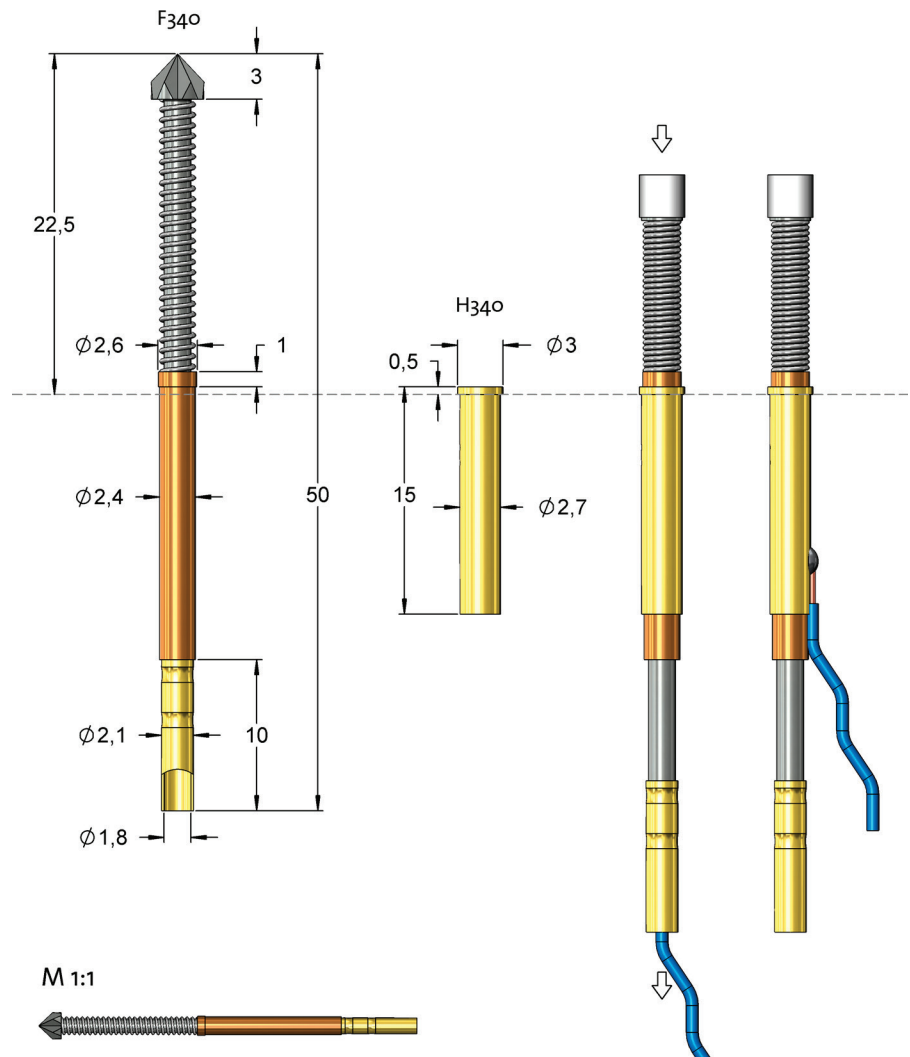

Series	Tip-Ø	Spring Force (cN)
<b>F340</b>	<b>04</b>	<b>S 350 N 260 -</b>
	Tip Style	Material Plating Version

**Material:** S = Stahl  
**Tip-Ø:** 350 = 3,50 mm (e.g.)  
**Plating:** L = Longtime gold plated, N = Nickel plated  
**Version:** -  
**Receptacle:** Order code according drawing

Tip Style	Number	Material	Ø in mm	Plating	Version
	04	S	3,50	N	-
	05	A	3,00	U	-
	05	S	3,50	L	-
	05	S	3,50	N	-
	07	S	3,50	L	-
	09	S	3,50	L	-
	17	A	3,00	U	-