



F652

Battery Contact 256 mil Solder Tight, Robust Version

Centers (mm/mil)	6,50 / 256
Current	30,0 A
R typ	<30 mOhm
Temperature	-45°C...+200°C (H)

Spring Force (cN ±20%)

Version	Preload	Nominal
Standard	60	150
Standard	100	300
Standard	120	400
Standard	150	500

Travel (mm)

Version	Nominal	Maximum
Standard	4,8	7,0
Pointing Accuracy		±0,08 mm

Materials and Plating

Plunger	Brass, gold plated
Barrel	Brass, gold plated
Spring	Stainless steel, unplated
Receptacle	Brass, gold plated

Accessories


Insertion tool probe	FDWZ-650
----------------------	----------

Drill Size (mm)


F652	4,98 - 5,01
H652...	5,62 - 5,65

Projection Height (mm)

F651 in H652...	9,0
-----------------	-----

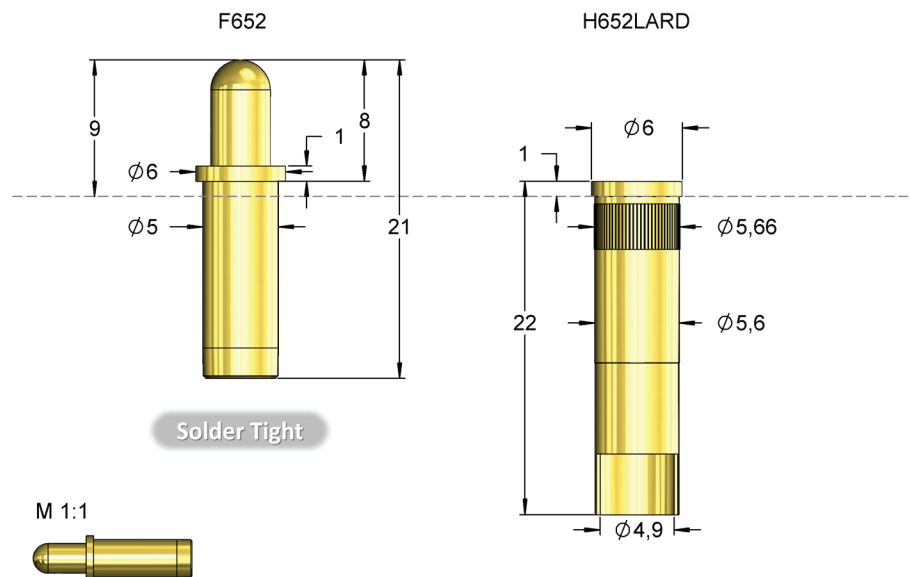

Design with standard plunger



Series	Tip-Ø	Spring Force (cN)
F652 11 M 400 G 150		
Tip Style	Material	Plating
Version		

Material: M= Brass
Tip-Ø: 400 = 4,00 mm (e.g.)
Plating: G = Gold plated
Receptacle: Order code according drawing

Tip Style	Number	Material	Ø in mm	Plating	Version
	11	M	4,00	G	-