



F67111B1004G230

Battery Contact for Pressing-in

Centers (mm/mil)	2,70 / 106
Current	5,0 A
R typ	<30 mOhm
Temperature	-45°C...+100°C

Spring Force (cN ±20%)

Version	Preload	Nominal
Standard	60	230

Travel (mm)

Version	Nominal	Maximum
Standard	2,0	3,5



Materials and Plating

Plunger	BeCu, gold plated
Barrel	Brass, gold plated
Spring	Music wire, silver plated

Drill Size (mm)

F67111B1004G230	1,68 - 1,70
-----------------	-------------

Design with standard plunger

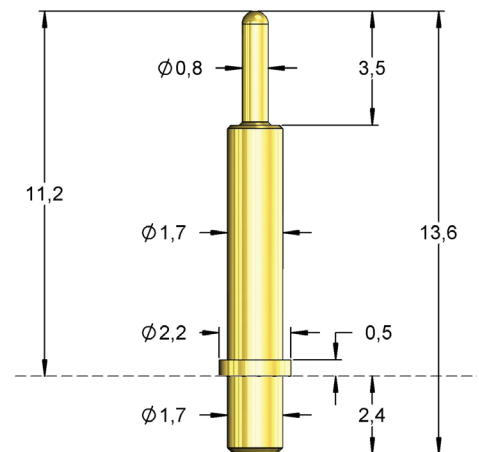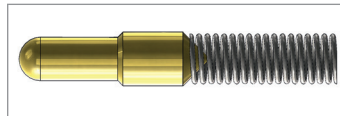

F67111B0109G130

Battery Contact for Pressing-in

Centers (mm/mil)	5,00 / 197
Current	8,0 A
R typ	<100 mOhm
Temperature	-45°C...+200°C (H)

Spring Force (cN ±20%)

Version	Preload	Nominal
Standard	40	130

Travel (mm)

Version	Nominal	Maximum
Standard	1,5	2,2


Materials and Plating

Plunger	BeCu, gold plated
Barrel	Brass, gold plated
Spring	Stainless steel, unplated

Drill Size (mm)

F67111B0109G130	2,00 - 2,05
-----------------	-------------

Design with drill hole plunger

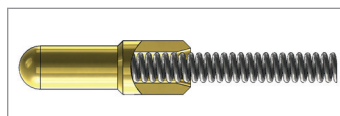

Also well suitable for direct soldering
on a PCB.

