



F63011S120L070

Short Travel Probe 100 mil

Centers (mm/mil)	2,54 / 100
Current	8,0 A
R typ	<30 mOhm
Temperature	-45°C...+100°C

Spring Force (cN ±20%)

Version	Preload	Nominal
Standard	40	70

Travel (mm)


Version	Nominal	Maximum
Standard	0,9	1,3
Pointing Accuracy		±0,08 mm

Materials and Plating

Plunger	Steel, gold plated
Barrel	Brass, gold plated
Spring	Music wire, silver plated

Drill Size (mm)

F630...	1,56 - 1,58
---------	-------------

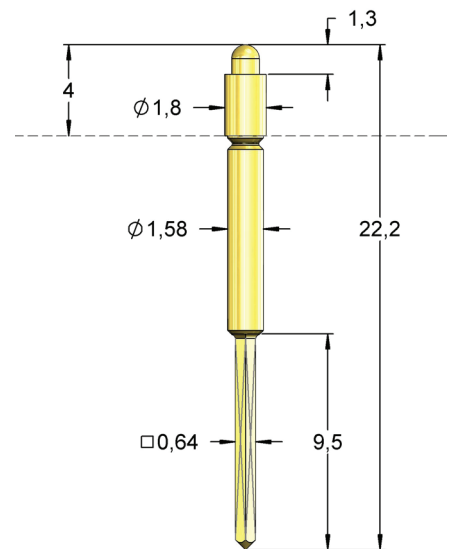

F69211M140G250

Short Travel Probe 100 mil

Centers (mm/mil)	2,54 / 100
Current	8,0 A
R typ	<30 mOhm
Temperature	-45°C...+200°C (H)

Spring Force (cN ±20%)

Version	Preload	Nominal
Standard	100	250

Travel (mm)

Version	Nominal	Maximum
Standard	2,8	3,0
Pointing Accuracy		±0,08 mm

Materials and Plating

Plunger	Brass, gold plated
Barrel	Brass, gold plated
Spring	Stainless steel, unplated

Drill Size (mm)

F692...	1,60 - 1,62
---------	-------------

