

THREADED PROBES

F723

Threaded Probe 157 mil Short Version

Centers (mm/mil)	4,00 / 157
Current	10,0 A
R typ	15 mOhm
Temperature	-40°C...+200°C (H)

Spring Force (cN ±20%)

Version	Preload	Nominal
Standard	40	80
Standard	70	150

Travel (mm)

Version	Nominal	Maximum
Standard	2,8	3,5
Thread (M)		2,0
Wrench Size		3,0
Pointing Accuracy		±0,10 mm

Materials and Plating

Plunger	see Tip Style
Barrel	Brass, gold plated
Spring	Stainless steel, unplated
Receptacles	Brass, gold plated

Accessories


Screw-in tool probe	FWZ733S1;
max. Tip-Ø 3,0 mm	FWZ733T1

Drill Size (mm)

H723LA	2,98 - 2,99
--------	-------------

Projection Height (mm)

H723LA with F723	7,3
------------------	-----

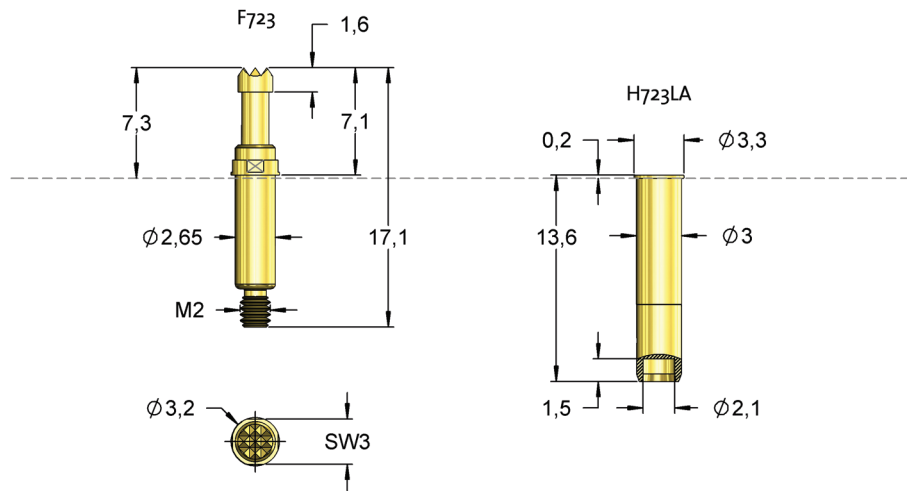

M 1:1



Corresponding plug-in version see F713, which is included in the catalogue for fine pitches, low heights and for direct soldering or on our homepage..

Series	Tip-Ø	Spring Force (cN)
F723	02 B 230 G	150
	Tip Style	Material
		Plating
		Version

Material:	B = BeCu
Tip-Ø:	230 = 2,30 mm (e.g.)
Plating:	G = Gold plated
Receptacle:	Order code according drawing

Tip Style	Number	Material	Plating	Ø in mm	Version
	02	B	G	2,30	-
	06	B	G	2,30	-
	12	B	G	2,30	-
	17	B	G	2,30	-