



F730

Threaded Probe 50 mil Standard

Centers (mm/mil)	1,27 / 50
Current	3,0 A
R typ	50 mOhm
Temperature	-45°C...+100°C

Spring Force (cN ±20%)

Version	Preload	Nominal
Standard	30	50
Standard	50	110

Travel (mm)

Version	Nominal	Maximum
Standard	4,0	5,0
Thread (M)		0,9x0,175
Wrench Size		1,0
Pointing Accuracy		±0,08 mm

Materials and Plating

Plunger	see Tip Style
Barrel	Bronze, gold plated
Spring	Music wire, gold plated
Receptacles	Brass, gold plated

Accessories


Insertion tool receptacle	FEWZ-040E0
Screw-in tool probe max. Tip-Ø 0,9 mm	FWZ730 (T)

Drill Size (mm)

H730...	0,99 - 1,00
---------	-------------

Projection Height (mm)

H730LA with F730	10,5
------------------	------

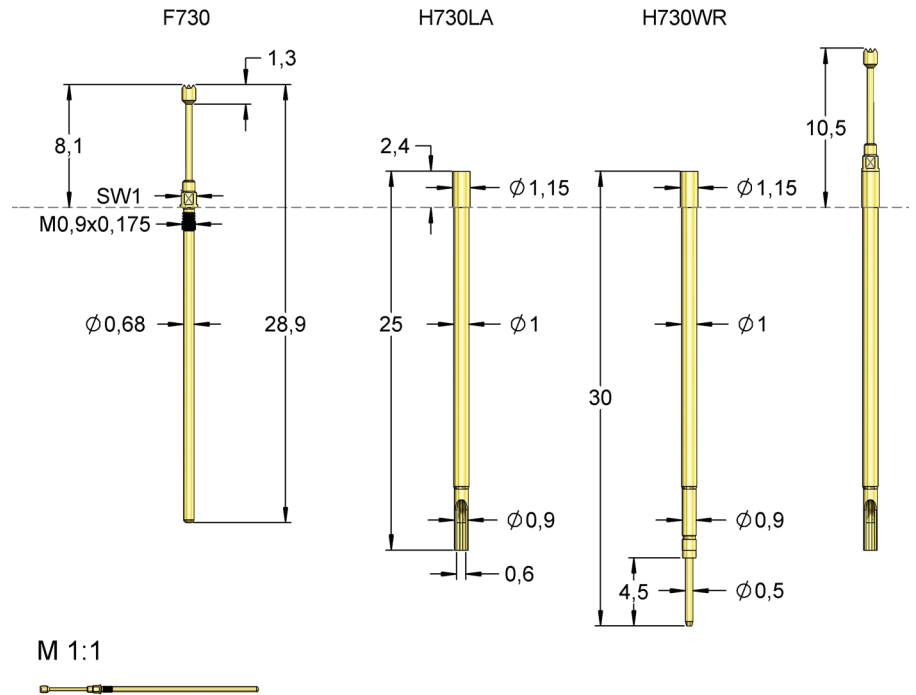

Series	Tip-Ø	Spring Force (cN)
F730	06	B 090 G 110
	Tip Style	Material Plating Version

Material: B = BeCu
Tip-Ø: 090 = 0,90 mm (e.g.)
Plating: G = Gold plated
Receptacle: Order code according drawing

Tip Style	Number	Material	Plating	Ø in mm	Version
	06	B	G	0,90	-
	12	B	G	0,64	-
	16	B	G	0,40	-
	17	B	G	0,64	-
	18	B	G	0,40	-