F756

Threaded Probe 100 mil Twist Proof with Continuous Plunger

Centers (mm/mil)	2,54 / 100
Current	5,0 A
R typ	30 mOhm
Temperature	-45°C...+200°C (H)

Spring Force (cN ±20%)

Version	Preload	Nominal
Standard	60	150
Standard	100	300

Travel (mm)

Version	Nominal	Maximum
Standard	4,0	4,4
Thread (M)		1,6
Wrench Size		1,7
Pointing Accuracy		±0,08 mm

Materials and Plating

Plunger	see Tip Style
Barrel	Brass, gold plated
Spring	Stainless steel, unplated
Receptacles	Brass, gold plated

Accessories

Alignment tool receptacle	FAWZ756
Screw-in tool probe	FWZ732 (T)

Drill Size (mm)

H756...	1,99 - 2,00
H756RD...	2,02 - 2,05

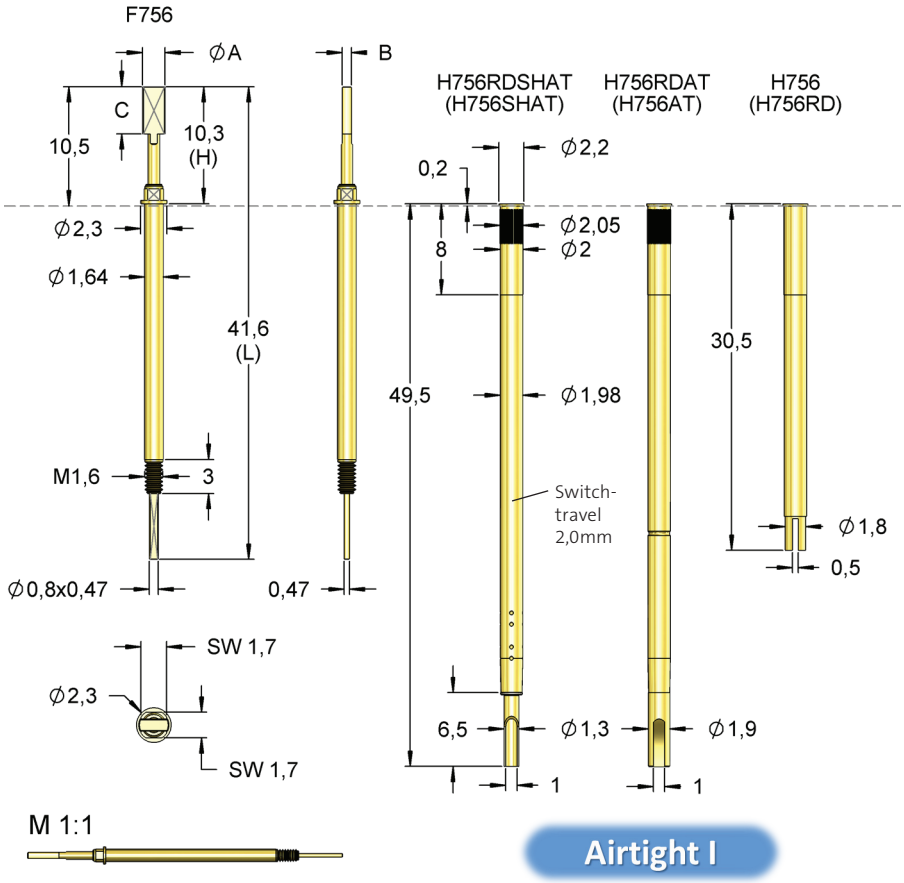

Further details of version **F75684B0007G080PT** with twist proof insulation cap see applications on page 83.
For the permissible leakage rate see information in the technical introduction.

KF82



KF84



Order code	Number	Ø A	B	C	H	L	Version	Screw-in tool
F75682B0001G150	82	1,10	0,45	5,00	10,30	41,60	-	FWZ732; FWZ732T
F75684B0001G150	84	1,50	0,50	4,15	10,30	41,60	-	FWZ732; FWZ732T
F75684B0001G300	84	1,50	0,50	4,15	10,30	41,60	-	FWZ732; FWZ732T
F75684B0004G150	84	1,50	1,00	4,15	10,30	41,60	-	FWZ732; FWZ732T
F75684B0004G300	84	1,50	1,00	4,15	10,30	41,60	-	FWZ732; FWZ732T
F75684B0003G150	84	2,00	0,80	4,15	10,30	41,60	-	FWZ732; FWZ732T
F75684B0003G300	84	2,00	0,80	4,15	10,30	41,60	-	FWZ732; FWZ732T
F75684B0006G300	84	2,00	0,80	4,15	10,30	41,60	-	FWZ732; FWZ732T

Edition 05/2021. All rights reserved. Further versions can be found at **www.feinmetall.com**