



F773C

**High Current Probe 138 mil
Robust Version,
up to 25 A, Plug-in**

Centers (mm/mil)	3,50 / 138
Current	25,0 A
R typ	<8 mOhm
Temperature	-45°C...+200°C (H)

Spring Force (cN ±20%)

Version	Preload	Nominal
C	60	150
C	60	300
C	170	600

Travel (mm)

Version	Nominal	Maximum
Standard	4,0	5,0
Pointing Accuracy		±0,10 mm

Materials and Plating

Plunger	see Tip Style
Barrel	Brass, gold plated
Spring	Stainless steel, unplated
Receptacle	Brass, gold plated

Accessories


Insertion tool receptacle	FEWZ-774E0
Insertion tool probe	FDWZ-100

Drill Size (mm)


H773LA	2,98 - 2,99
--------	-------------

Projection Height (mm)

H773LA mit F773...C	10,5
---------------------	------

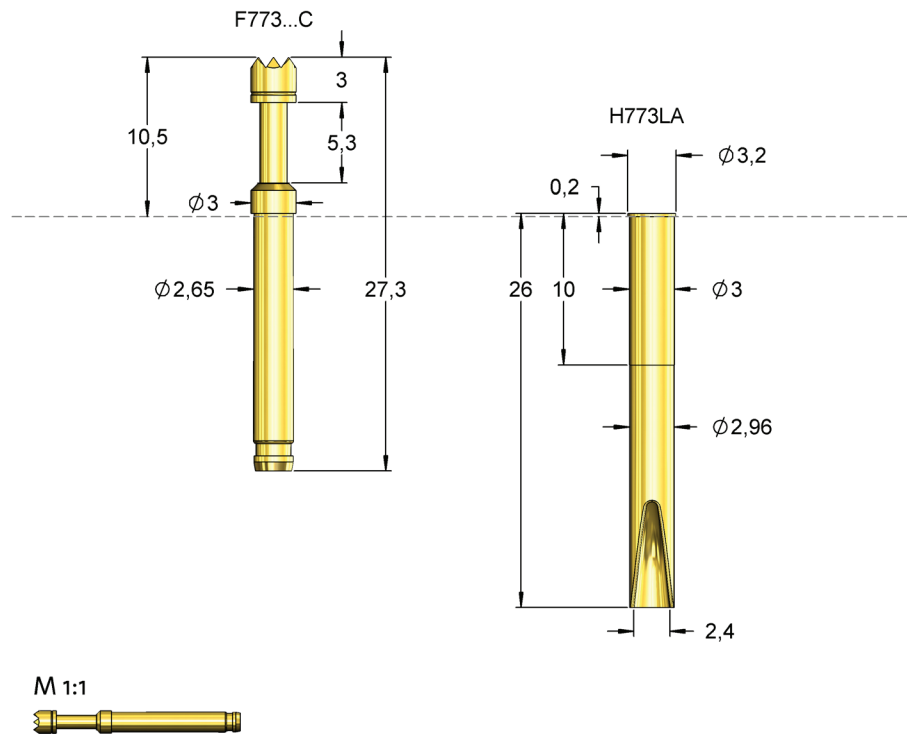


This probe is suitable for applications in burn-in / run-in tests and for functional tests with higher currents.

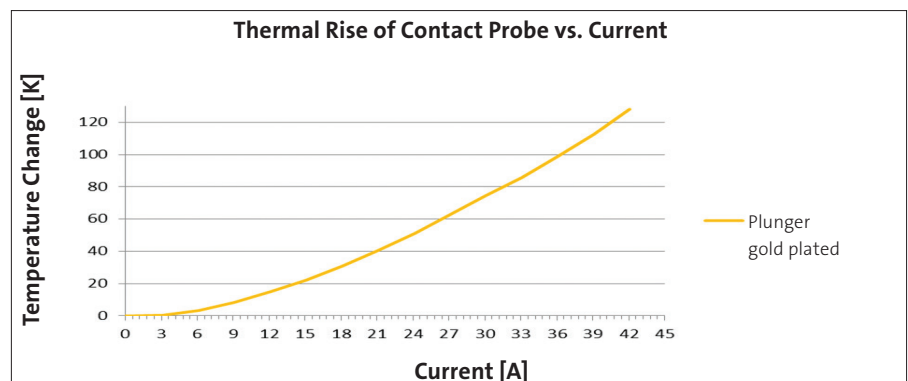

* Center differing from standard.

Design with split plunger



Series	Tip-Ø	Spring Force (cN)
F773 06 B 230 G 300 C		
Tip Style	Material	Plating
Version		

Material: B = BeCu, A = AgNi (Silver alloy)
Tip-Ø: 230 = 2,30 mm (e.g.)
Plating: G = Gold plated, U = Unplated
Version: C = High Current Version
Receptacle: Order code according drawing

Tip Style	Number	Material	Ø in mm	Plating	Version
	05	A	3,00	U	C
	06	B	2,30	G	C
	06	B	3,00	G	C
	06	B	4,00 *	G	C
	07	B	3,00	G	C
	11	B	1,40	G	C
	11	B	1,80	G	C
	12	B	2,30	G	C
	14	B	2,30	G	C
	17	B	4,00 *	G	C
	55	B	3,00	G	C