

# RADIO FREQUENCY PROBES




## Contacting HSD-Male/Female

**NEW**

Connector	Probe	Frequency	Mounting	Connection	Order number	Data sheet	
HSD-Male			2 GHz	pluggable	H819AE2/3	HF81905B0001G1270	
HSD-Male			3 GHz	pluggable	HSD	HF81955B1005G2000	
HSD-Male			3 GHz	pluggable	HSD	HF81955B1006G2020	
HSD-Male			2 GHz	screwable	H819AE4	HF81914S0004L1270	
HSD-Female			2 GHz	pluggable	H819AE2/3	HF81912B0002G2020	

### Connection Cables for HF19

By combining the connection elements H819AE2 and H819AE1 a **defined and reproducible measuring** setup with fix parameters can be realized.

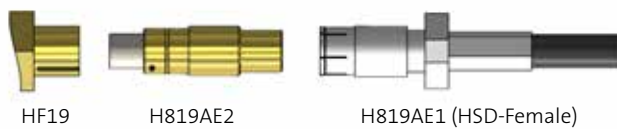

**Connection on both sides:**  
**D4K- Dacar 535,**  
 socket 4-pole, straight  
 Length: 500 mm (± 10 mm)

### Connection units selectable



for direct soldering