



FEINMETALL
Contact Technologies



ELECTRONIC TESTING

Outstanding in any application

> FEINMETALL.COM

CONTENT

<u>GENERAL INFORMATION</u>	<u>4</u>
<u>BASIC PROBES</u>	<u>12</u>
<u>BASIC PROBES > 100 MIL</u>	<u>13</u>
<u>BASIC PROBES 100 MIL</u>	<u>21</u>
<u>BASIC PROBES 75 MIL</u>	<u>52</u>
<u>BASIC PROBES 50 MIL</u>	<u>71</u>
<u>BASIC PROBES 30 - 40 MIL</u>	<u>89</u>
<u>SOLAR PROBES</u>	<u>92</u>
<u>FLYING PROBES</u>	<u>94</u>
<u>INTERFACE PROBES / SOLUTIONS</u>	<u>100</u>
<u>TOOLS</u>	<u>114</u>

GENERAL INFORMATION



PASSION FOR FINEST TECHNOLOGY

Competence

FEINMETALL is your partner for the reliable contacting of electronic components. The wide range of applications for spring contact probes includes board tests with fine centers up to wire harness and connector tests with individual and intelligent solutions.

Innovative capacity

Since more than 60 years FEINMETALL represents a high level of innovation. Many patent-registered solutions have been milestones in the world of test engineering.

Broad competence in-house

The development and manufacturing of spring contact probes, special contact solutions and Semiconductor Wafer Test in one company are a wide basis for our competence in precision technology and micro-mechanics. This combination is unique at the market and represents "German Technology" at its best.

International customer service

We are acting in the international hightech industry and our processes are aligned accordingly. With nine subsidiaries worldwide and a strong network of well trained partners we are always connected to the markets and to our customers, wherever they are. Local stocks and special customs certificates provide a high delivery performance. (e.g. AEO - Authorised Economic Operator).

Quality

Quality controls all process steps at FEINMETALL. From product development and construction up to manufacturing and delivery all operation steps are perfectly aligned.

FEINMETALL is certified according to DIN ISO 9001. Additionally a wide range of measures like e.g. risk analysis by FMEA during the whole product development process ensure a maximum of technical as well as delivery reliability.

Environment and health protection

FEINMETALL is committed to the goals of the up-to-date legislation regarding environment as well as health protection and to conformance to all necessary measures. The current statements regarding the various European environment and health regulations are available on our homepage.

Customer focus

Our engineers and technicians work closely together with our customer and have a deep knowledge of the practical applications. Our know-how is your advantage!

FM Choice

What is FM Choice?

FM Choice is our specially curated selection of the most reliable and frequently used probes in the market. Based on our expertise and experience, we have pre-selected the top-performing probes, so you don't have to choose from hundreds of options. With FM Choice, we make your decision easier by offering the most trusted solutions that meet your needs.

One of the greatest advantages of FM Choice is high availability and fast delivery, as we can often ship directly from our stock. This enables us to meet your demands whenever you need them. Plus, FM Choice offers competitive pricing, even for smaller quantities, making it an attractive solution for all kinds of projects.

Our portfolio includes over 700 contact probes for pitches between 6 and 100 mil, covering a wide range of applications and ensuring we meet most technical requirements quickly and efficiently.

Benefits at a glance



Most trusted solutions



Competitive prices



Fast delivery & high availability

Discover FM Choice products online

With our new Product Finder, we offer you a complete overview of all FM Choice products that you can easily search through. This high-performance tool allows you to search for specific products and compare them based on their technical features.

In addition to the FM Choice products, we invite you to explore the other categories to discover our complete product portfolio. Start your selection now and experience the variety and quality of our products.

> FEINMETALL.COM/PRODUCT-FINDER



ELECTRICAL INFORMATION

Electrical conductivity

In a contact probe the primary current flow typically leads through the plunger, the barrel and the receptacle. A secondary current flow leads through the plunger, the spring and the barrel. The transition points cause certain transfer resistances that are influenced by the following factors:

- Conductivity of the base material
- Conductivity of the plating material
- Condition of the surface of the probe
- Size of the contact surface
- Contact forces at the transition points

FEINMETALL is taking measures to guarantee a constant low contact resistance during the whole lifetime of the probes. The maximum continuous currents (referred to the FEINMETALL standard high current test) and the typical resistances of each probe are shown in the data sheets. A pulse current can be higher depending on pulse and rest time, cooling and various other influences.

Max. Operating voltage

Voltmeters must always be connected in parallel with the electrical device or component on which the voltage is to be measured. This is necessary in order to measure the voltage applied to this component, because for the parallel connection the voltage in both branches is the same.

If the user operates our probes with a higher voltage than defined by DIN VDE 0100, part 410 as low voltage not dangerous to touch, *FEINMETALL does not assume any liability. Furthermore, the user himself is obliged to determine and implement the legally required protective measures for people and equipment.*

Temperature operating range

Depending on the electrical load, self-heating occurs as a result of power loss. The permissible environmental temperature decreases accordingly (derating). Exposure to additional loads such as high humidity, rapid and extreme temperature changes (thermal shock) and extreme loads (e.g. far above nominal travel) can lead to a shortened lifetime. For high current applications where temperature can rise up to +200°, our Feinmetall High current products are designed to withstand this challenge and remain constant performance.

Electrical protection class

According to VDE0100 part 410, our probes are only to be operated with low voltage that is not dangerous to touch (25 V rms AC, 60 V DC). These values include all occurring surge voltages, e.g. due to overvoltage, switching peaks, etc.

If the user operates our probes with a higher voltage than defined by DIN VDE 0100, part 410 as low voltage not dangerous to touch, FEINMETALL does not assume any liability. Furthermore, the user himself is obliged to determine and implement the legally required protective measures for people and equipment.

Dielectric / electric strength of bipolar probes


The dielectric strength (usually stated in kV/mm) of an insulator is the maximum electric field strength that may prevail in the material (including air) without a voltage breakdown (arc or spark) occurring. The creepage distances must be much longer, especially when exposed to dirt and moisture. The dielectric strength depends on the geometry of the probe, the material (dielectric), the ambient conditions and the degree of contamination. This comes into play in all our products with electrically insulating functions, e.g. switching probes, switching receptacles, combination receptacles, coaxial probes and insulating caps.

GENERAL INFORMATION

TOPIC OVERVIEW


Circuit Board Testing

We offer all commercially available ICT/FCT probes for Circuit Board Testing. We also provide an innovative solution for challenging test conditions with our PROGRESSIVE series.

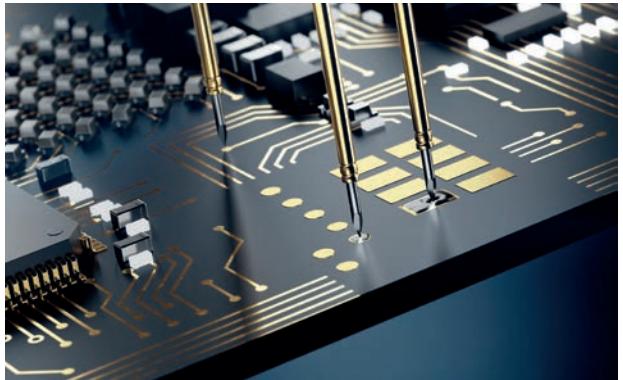

Solar Wafer Testing

We offer special probes with an extended service life and particularly low resistances for contacting busbars on Solar Wafers.

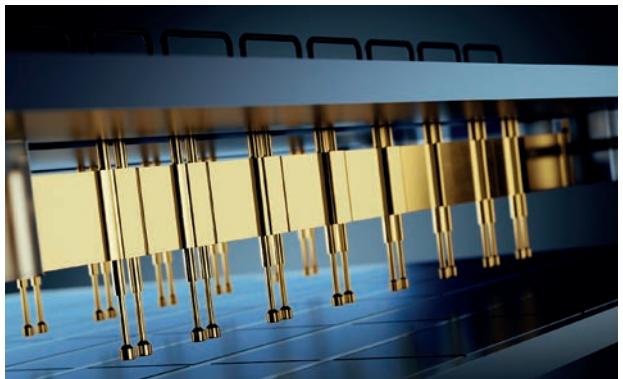


Interface Solutions

FEINMETALL offers all Interface Solutions needed for secure test signal transmission, including blocks, probes, and rigid pins.



Flying Probes

Our portfolio's probes, hallmarked by high precision and low resistance, are compatible with the market's common test systems.

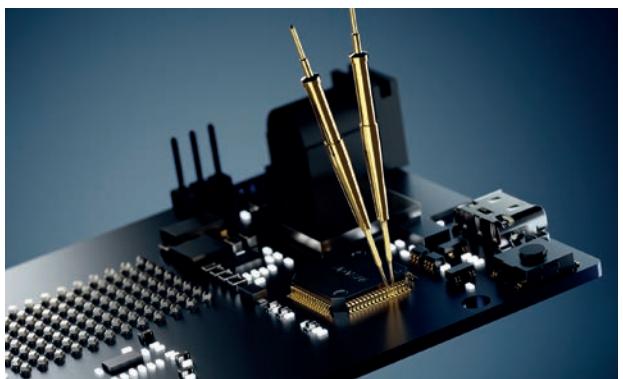

GENERAL INFORMATION

CATEGORIES OF BASIC CONTACT PROBES

BASIC CONTACT PROBES
30-40MIL



BASIC CONTACT PROBES
50MIL



BASIC CONTACT PROBES
100MIL>



FLYING PROBES



GENERAL INFORMATION

BASIC CONTACT PROBES
75MIL




BASIC CONTACT PROBES
100MIL



INTERFACE PROBES



INTERFACE SOLUTIONS

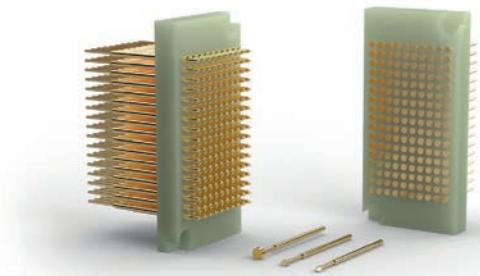


GENERAL INFORMATION

PRODUCT NAME

Number code system probes

In order to improve the clarity of the material designations, the self-explanatory number code has been further developed. Therefore, all Basic Contact Probes have been redefined according to the order code shown below.

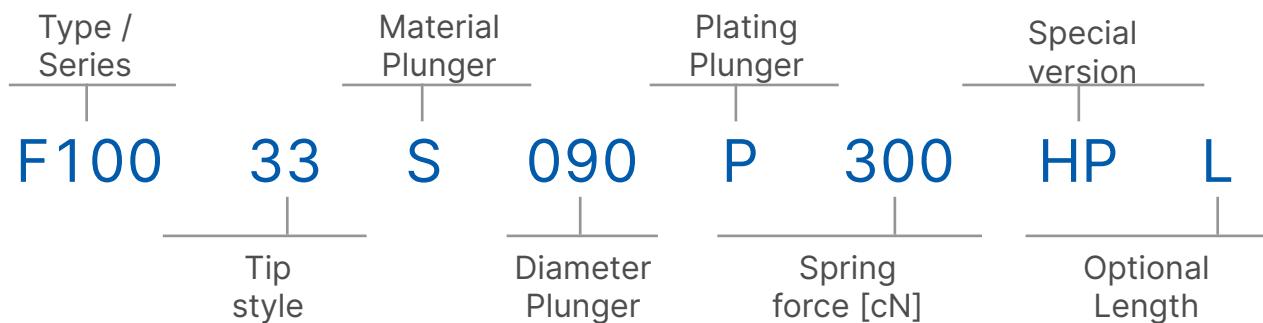

Material Plunger

- B = BeCu (Beryllium Copper)
P = Palladium alloy
S = Steel

Diameter

090 = 0.90 mm

Plating Plunger

- G = Gold plating
L = Longtime gold plating
N = Nickel plating
U = Unplated
P = Functional plating progressive series
R = Rhodium plating
S = Silver plating
LX = Anodizing
M = Multiplex gold plating

Spring force

300 = 300 cN

Special Version

- L = Long version
S = Short version
H = High temperature version
HP = Progressive series
IK04 = Insulation cap 0.4 mm distance

Optional Length

- L = Long version
S = Short version
E21 = Projection height 21 mm (e.g.)

GENERAL INFORMATION

PRODUCT NAME

Number code system receptacles

In order to improve the clarity of the material designations, the self-explanatory number code has been further developed. Therefore, all receptacles have been redefined according to the order code shown below.



Connection

CR	= Crimp
LA	= Solder
WW	= Wire wrap
WR	= Round pin
WL	= Wireless

Press ring position


2.0	= 2.0 mm
7.6	= 7.6 mm
10.0	= 10.0 mm

Special Version

AT	= Air tight
RD	= With knurl
S1	= Special version 1

Pin Length

10 = 10.0 mm

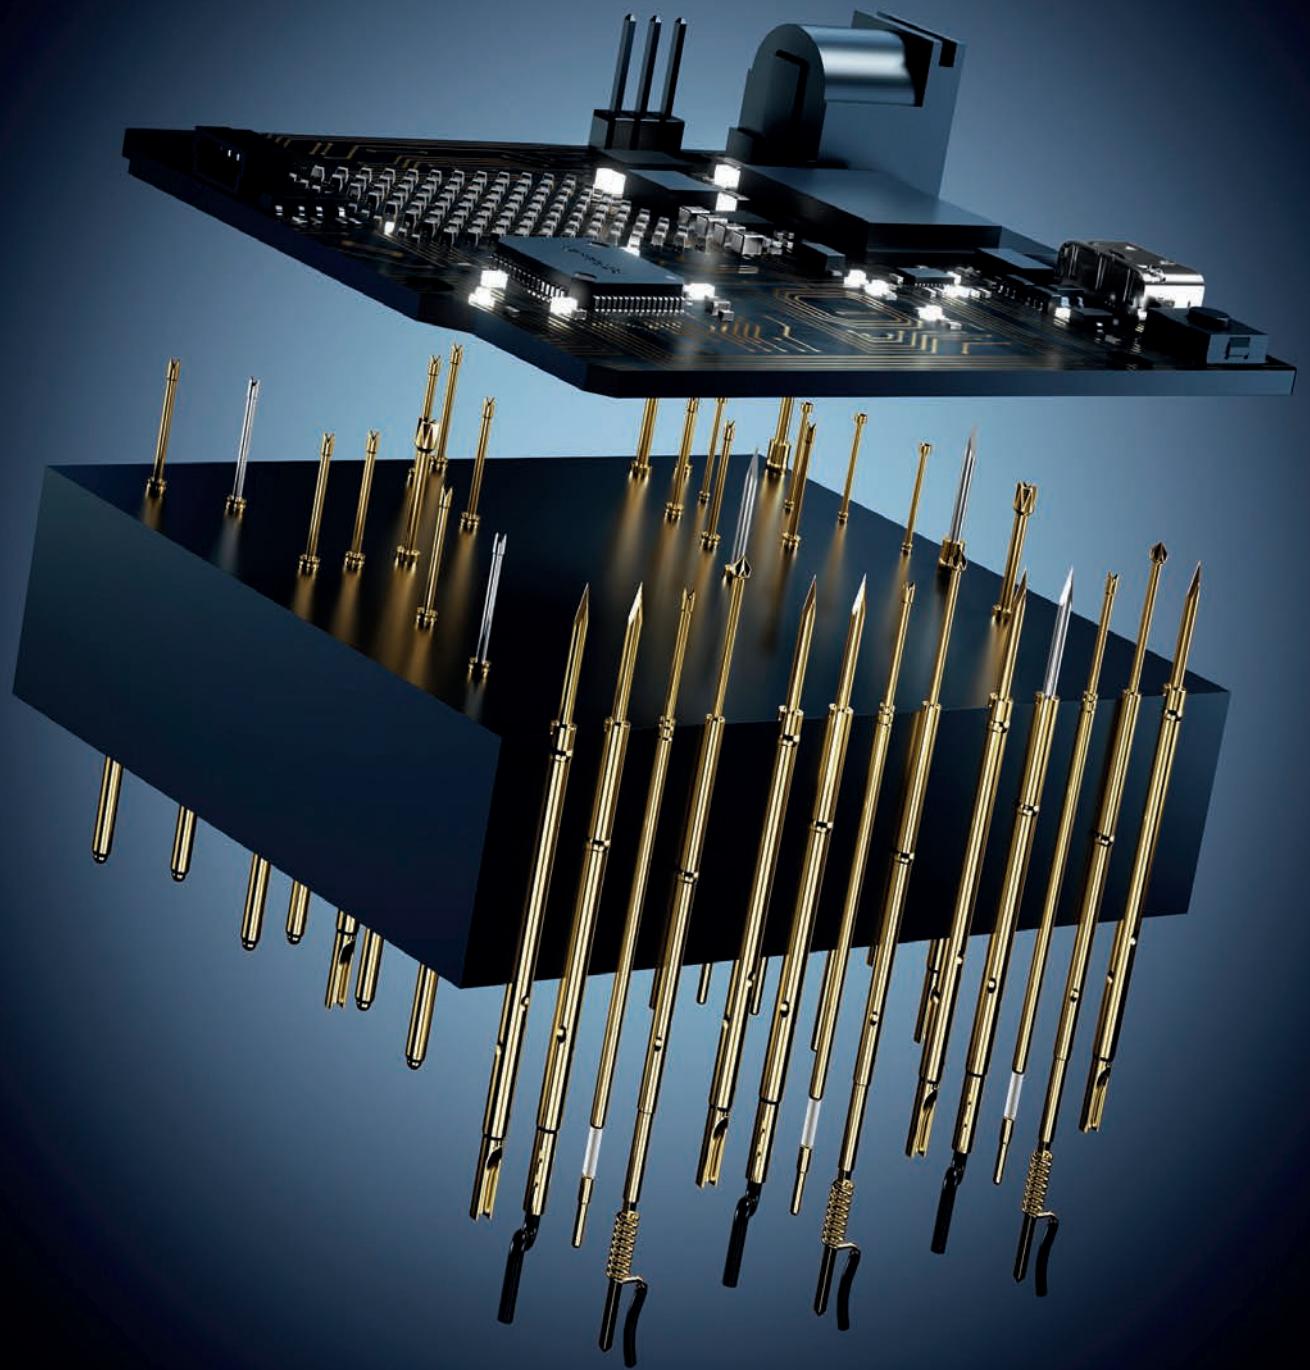

CIRCUIT BOARD TESTING

BASIC PROBES > 100 MIL

FM Choice



F796

Up to 10 A | 138 mil | FCT application

Electrical specifications

Current [A]	10
R TYP [mOhm]	<25

Mechanical specifications

Temperature [°C]	-45°...+100°
Preload [cN]	80
Spring force [cN] at nt ±20%	300
Nominal travel [mm]	8.0
Maximum travel [mm]	10.0

Materials and plating


Plunger	BeCu	gold plated
Barrel	Bronze	gold plated
Spring	Spring steel	silver plated
Receptacle	Nickel silver	gold plated

Accessories

1005112	H774LA1	Receptacle
1003642	FEWZ-774EO	Insertion tool receptacle
1003566	FDWZ-100	Insertion tool probe

Series drawing

All measurements are in mm.

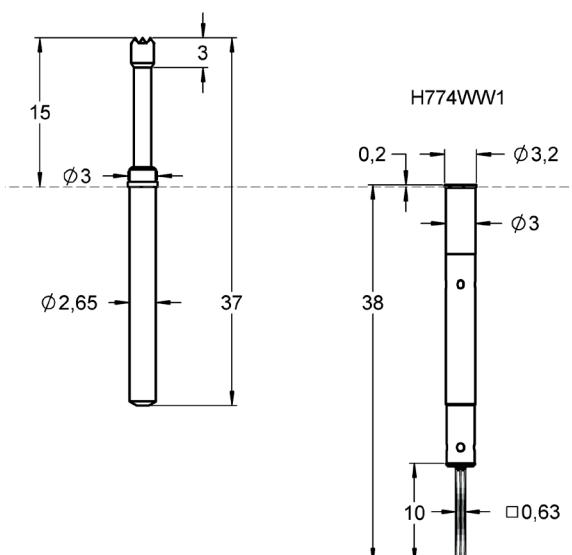

Order code	Product name	Tip Style	Tip Ø [mm]	Force [cN]	Version	FM Choice
1001552	F79606B230G300	06	2.30	300	-	FM Choice
1005674	F79611B176G300	11	1.76	300	-	FM Choice
1002737	F79612B230G300	12	2.30	300	-	FM Choice
1001553	F79614B230G300	14	2.30	300	-	FM Choice

BASIC PROBES > 100 MIL



F785

Up to 10 A | 138 mil | FCT application

Electrical specifications

Current [A]	10
R Typ [mOhm]	<10

Mechanical specifications

Temperature [°C]	-45°...+100°
Preload [cN]	80
Spring force [cN] at nt ±20%	300
Nominal travel [mm]	6.4
Maximum travel [mm]	8.0

Materials and plating

Plunger	BeCu	gold plated
	Steel	longtime gold plated
Barrel	Bronze	gold plated
Spring	Spring steel	silver plated
Receptacle	Nickel silver	gold plated

Accessories

1005112	H774LA1	Receptacle
1003642	FEWZ-774EO	Insertion tool receptacle
1003566	FDWZ-100	Insertion tool probe


* Overview of other receptacles H774 on page 18

Drill size recommendation (mm)

1005112	H774LA1	2.98 - 2.99
---------	---------	-------------

Series drawing

All measurements are in mm.

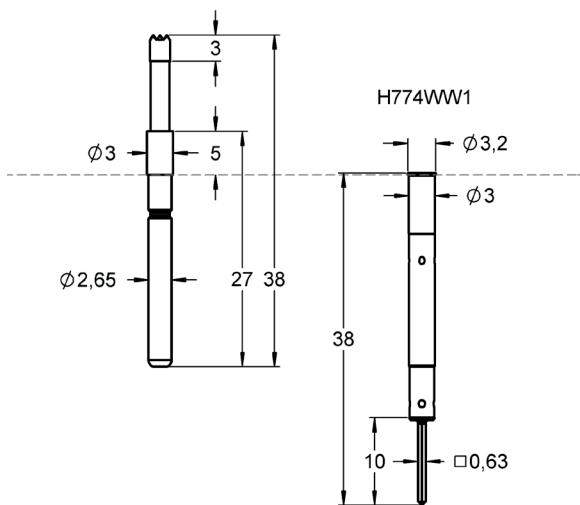

BASIC PROBES > 100 MIL



F785L

Up to 10 A | 138 mil | FCT application

Electrical specifications

Current [A]	10
R TYP [mOhm]	<10

Mechanical specifications

Temperature [°C]	-45°...+100°
Preload [cN]	80 80
Spring force [cN] at nt ±20%	150 300
Nominal travel [mm]	6.4 6.4
Maximum travel [mm]	8.0 8.0

Materials and plating

Plunger	BeCu Steel	gold plated longtime gold plated
Barrel	Bronze	gold plated
Spring	Spring steel	silver plated
Receptacle	Nickel silver	gold plated


Accessories

1005112	H774LA1	Receptacle
1003642	FEWZ-774EO	Insertion tool receptacle
1003566	FDWZ-100	Insertion tool probe

* Overview of other receptacles H774 on page 18

Series drawing

All measurements are in mm.

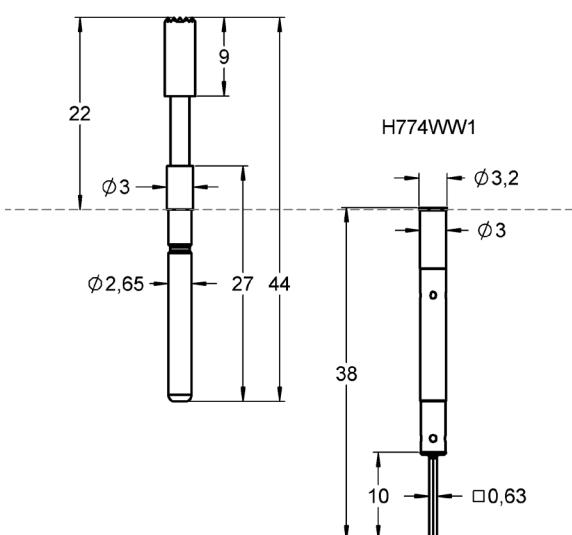

Drill size recommendation (mm)

1005112	H774LA1	2.98 - 2.99
---------	---------	-------------

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1003981	F78506B120G300L	06	1.20	B / G	300	-	L	-
1003442	F78506B250G300L	06	2.50	B / G	300	-	L	-
1015209	F78506B350G150L	06	3.50	B / G	150	-	L	-
1003069	F78506B350G300L	06	3.50	B / G	300	-	L	-
1035639	F78514S120L300L	14	1.20	S / L	300	-	L	-
1003144	F78514S230L300L	14	2.30	S / L	300	-	L	-

BASIC PROBES > 100 MIL

FM Choice



F773

Up to 10 A | 138 mil | ICT application

Electrical specifications

Current [A]	10
R Typ [mOhm]	<25

Mechanical specifications

Temperature [°C]	-45°...+100°		
Preload [cN]	60	60	100
Spring force [cN] at nt ±20%	150	300	400
Nominal travel [mm]	4.0	4.0	4.0
Maximum travel [mm]	5.0	5.0	5.0

Materials and plating

Plunger	BeCu	gold plated
	Stainless steel	unplated
Barrel	Bronze	gold plated
Spring	Spring steel	silver plated
Receptacle	Nickel silver	gold plated

Accessories

1005112	H774LA1	Receptacle
1003642	FEWZ-774E0	Insertion tool receptacle
1003566	FDWZ-100	Insertion tool probe


* Overview of other receptacles H774 on page 18

Drill size recommendation (mm)

1005112	H774LA1	2.98 - 2.99
---------	---------	-------------

Series drawing

All measurements are in mm.

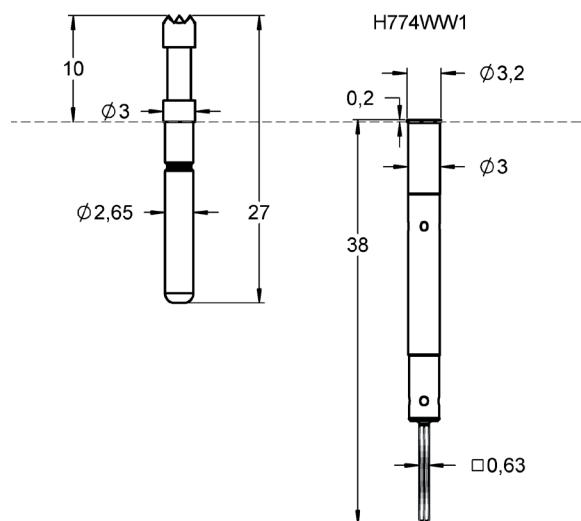

FURTHER TIP STYLES

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1001580	F77306B230G400	06 	2.30	B / G	400	-	-	-
1001581	F77306B300G150	06 	3.00	B / G	150	-	-	-
1007444	F77306B300G220	06 	3.00	B / G	220	-	-	-
1001582	F77306B300G300	06 	3.00	B / G	300	-	-	-
1001583	F77306B300G400	06 	3.00	B / G	400	-	-	-
1001584	F77306B400G150	06 	4.00	B / G	150	-	-	-
1001585	F77306B400G300	06 	4.00	B / G	300	-	-	-
1001586	F77306B400G400	06 	4.00	B / G	400	-	-	-
1001516	F77307S230L300	07 	2.30	S / L	300	-	-	-
1003362	F77307S400L300	07 	4.00	S / L	300	-	-	-
1001517	F77311B180G150	11 	1.80	B / G	150	-	-	-
1001518	F77311B180G300	11 	1.80	B / G	300	-	-	-
1001520	F77312B230G150	12 	2.30	B / G	150	-	-	-
1001521	F77312B230G300	12 	2.30	B / G	300	-	-	-
1001522	F77312B230G400	12 	2.30	B / G	400	-	-	-
1001523	F77312B300G150	12 	3.00	B / G	150	-	-	FM Choice
1001524	F77312B300G300	12 	3.00	B / G	300	-	-	-
1014261	F77312E230U150	12 	2.30	E / U	150	-	-	-
1001526	F77314S230L150	14 	2.30	S / L	150	-	-	-
1001527	F77314S230L300	14 	2.30	S / L	300	-	-	-
1001529	F77315B300G300	15 	3.00	B / G	300	-	-	-
1001530	F77315B300G400	15 	3.00	B / G	400	-	-	-
1005868	F77316B180G300	16 	1.80	B / G	300	-	-	-
1004112	F77317B230G150	17 	2.30	B / G	150	-	-	-
1007493	F77317B300G150	17 	3.00	B / G	150	-	-	FM Choice
1009334	F77317B300G300	17 	3.00	B / G	300	-	-	-
1001531	F77318B180G150	18 	1.80	B / G	150	-	-	FM Choice
1001532	F77318B180G300	18 	1.80	B / G	300	-	-	-
1001533	F77321S180L150	21 	1.80	S / L	150	-	-	-
1001534	F77321S180L300	21 	1.80	S / L	300	-	-	-
1001536	F77328B230G400	28 	2.30	B / G	400	-	-	-

BASIC PROBES > 100 MIL



H774

Up to 10 A | 138 mil | Receptacles

Materials and plating

Receptacle Nickel silver gold plated

Accessories

1003642	FEWZ-774E0	Insertion tool receptacle
---------	------------	---------------------------


Drill size recommendation (mm)

H774...	With collar	2.98 - 2.99
---------	-------------	-------------

Order code	Product name	Press ring position [mm]	CXN
1005112	H774LA1	0.2	LA
1005111	H774CR1	0.2	CR
1004821	H774WW1	0.2	WW

Series drawing

All measurements are in mm.

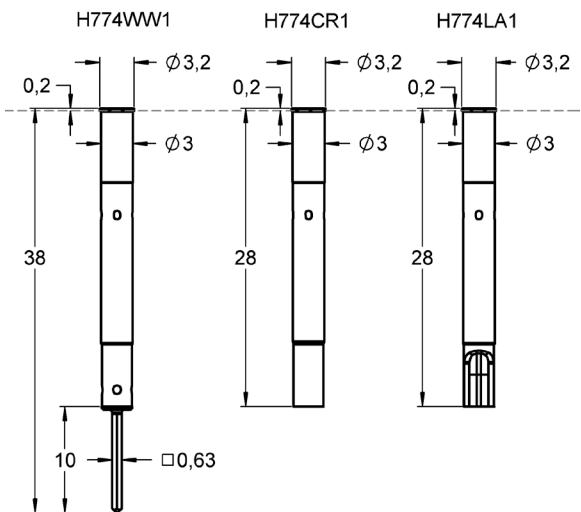

BASIC PROBES > 100 MIL



F563

Up to 6 A | 118 mil | ICT application

Electrical specifications

Current [A]	6
R TYP [mOhm]	<100

Mechanical specifications

Temperature [°C]	-45°...+100°
Preload [cN]	90 180
Spring force [cN] at nt ±20%	180 300
Nominal travel [mm]	4.3 4.3
Maximum travel [mm]	6.4 6.4

Materials and plating

Plunger	BeCu	gold plated
Barrel	Bronze	gold plated
Spring	Stainless steel	unplated
Receptacle	Nickel silver	gold plated

Accessories


1001704	H563LA	Receptacle
1001705	H563WW	Receptacle
1005041	FEWZ-563E0	Insertion tool receptacle
1003566	FDWZ-100	Insertion tool probe

Drill size recommendation (mm)

Press ring as stop	2.34 - 2.35
Press ring inserted	2.40 - 2.45

Series drawing

All measurements are in mm.

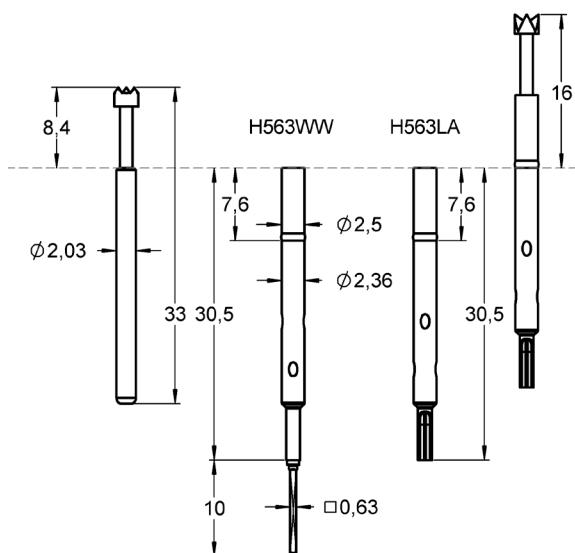

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1005532	F56305B170G180	05	1.70	B / G	180	-	-	-
1005821	F56305B170G300	05	1.70	B / G	300	-	-	-
1007198	F56305B250G300	05	2.50	B / G	300	-	-	-

BASIC PROBES > 100 MIL

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1001329	F56306B250G180	06 	2.50	B / G	180	-	-	-
1005609	F56306B250G300	06 	2.50	B / G	300	-	-	-
1007771	F56306B400G180	06 	4.00	B / G	180	-	-	-
1053965	F56306B400G300	06 	4.00	B / G	300	-	-	-
1001330	F56311B130G180	11 	1.30	B / G	180	-	-	-
1014859	F56311B130G300	11 	1.30	B / G	300	-	-	-
1013737	F56312B170G180	12 	1.70	B / G	180	-	-	-
1001331	F56312B250G180	12 	2.50	B / G	180	-	-	-
1001332	F56314B250G180	14 	2.50	B / G	180	-	-	-
1013032	F56314B250G300	14 	2.50	B / G	300	-	-	-
1009238	F56315B300G180	15 	3.00	B / G	180	-	-	-
1017181	F56316B130G180	16 	1.30	B / G	180	-	-	-
1053967	F56317B170G180	17 	1.70	B / G	180	-	-	-
1053968	F56318B070G180	18 	0.70	B / G	180	-	-	-
1001333	F56318B130G180	18 	1.30	B / G	300	-	-	-

BASIC PROBES 100 MIL



H772

Up to 5 A | 100 mil | Receptacles

Materials and plating

Receptacle	Nickel silver	gold plated
------------	---------------	-------------

Accessories

1008394	FEWZ-772EV	Insertion tool receptacle
1003640	FEWZ-772EO	Insertion tool receptacle


Drill size recommendation (mm)

H772...	With collar	2.02 - 2.03
H772...	Press ring as stop	1.97 - 2.00
H772...	Press ring inserted	2.03 - 2.05

Order code	Product name	Press ring position [mm]	CXN
1035995	H772WW-7.6	7.6	WW
1036005	H772LA-7.6	7.6	LA
1035994	H772CR-7.6	7.6	CR
1035103	H772WL-7.6	7.6	WL
1018331	H772WW10-0.1	0.1	WW
1018330	H772LA-0.1	0.1	LA
1018307	H772CR-0.1	0.1	CR
1018289	H772LI-0.1	0.1	LI

Series drawing

All measurements are in mm.

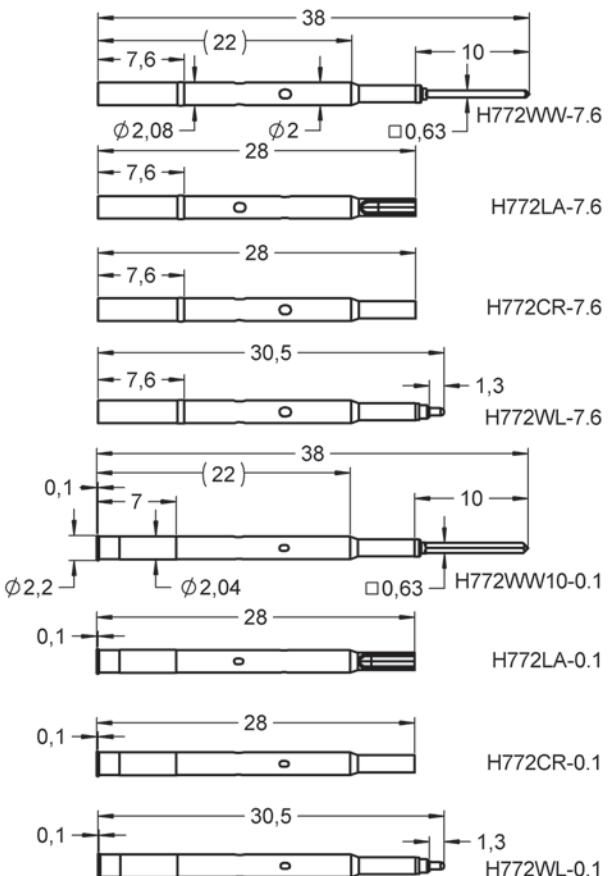

The insertion depth 22 mm and outer diameter are the same for all receptacles shown above. Different dimensions are listed.

BASIC PROBES 100 MIL



F797

Up to 5 A | 100 mil | FCT application

Electrical specifications

Current [A]	5
R Typ [mOhm]	<25

Mechanical specifications

Temperature [°C]	-45°...+100°
Preload [cN]	60 60
Spring force [cN] at nt ±20%	150 300
Nominal travel [mm]	8.0 8.0
Maximum travel [mm]	10.0 10.0

Materials and plating

Plunger	BeCu	gold plated
Barrel	Nickel silver	gold plated
Spring	Spring steel	silver plated
Receptacle	Nickel silver	gold plated


Accessories

1035995	H772WW-7.6	Receptacle
1003640	FEWZ-772E0	Insertion tool receptacle
1003566	FDWZ-100	Insertion tool probe

* Overview of other receptacles on page 21

Series drawing

All measurements are in mm.

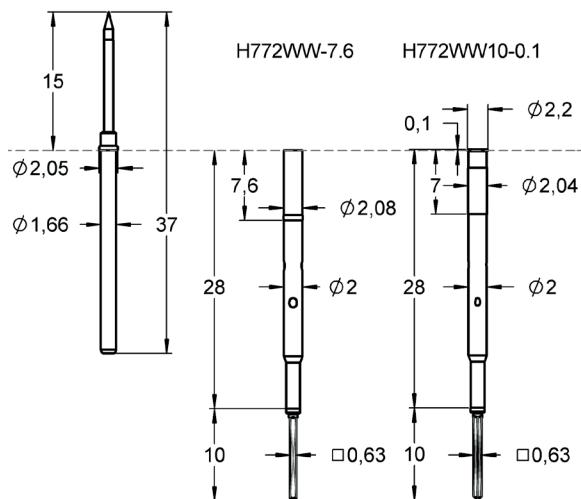

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1001554	F79703B100G150	03	1.00	B / G	150	-	-	-
1054000	F79706B200G150	06	2.00	B / G	150	-	-	-
1001706	F79706B200G300	06	2.00	B / G	300	-	-	-
1007277	F79716B100G150	16	1.00	B / G	150	-	-	-
1008753	F79716B100G300	16	1.00	B / G	300	-	-	-
1001708	F79718B100G150	18	1.00	B / G	150	-	-	-
1054001	F79718B100G300	18	1.00	B / G	300	-	-	-

BASIC PROBES 100 MIL



F786HP

Up to 5 A | 100 mil | ICT application

Electrical specifications

Current [A]	5
R TYP [mOhm]	<25

Mechanical specifications

Temperature [°C]	-45°...+100°
Preload [cN]	180 180
Spring force [cN] at nt ±20%	300 500
Nominal travel [mm]	6.4 6.4
Maximum travel [mm]	8.0 8.0

Materials and plating

Plunger	Palladium alloy	unplated
Barrel	Nickel silver	gold plated
Spring	Spring steel	silver plated
Receptacle	Nickel silver	gold plated

Accessories

1035995	H772WW-7.6	Receptacle
1003640	FEWZ-772E0	Insertion tool receptacle
1003566	FDWZ-100	Insertion tool probe


* Overview of other receptacles on page 21

Drill size recommendation (mm)

H772...	With collar	2.02 - 2.03
H772...	Press ring as stop	1.97 - 2.00
H772...	Press ring inserted	2.03 - 2.05

Series drawing

All measurements are in mm.

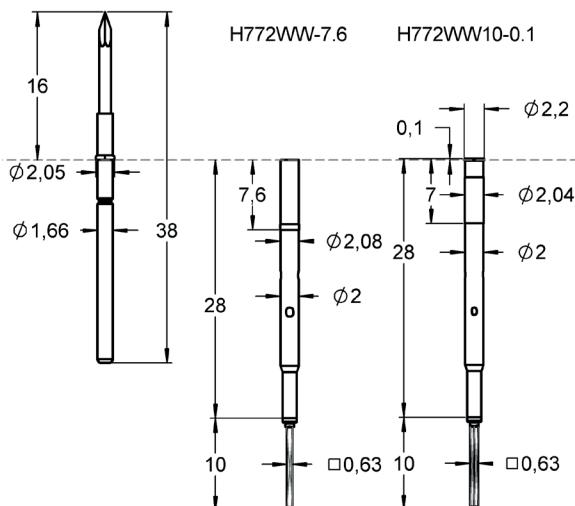

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1032612	F78610S080P300HP	10	0.80	S / P	300	-	HP	-
1015524	F78633S130P500HP	33	1.30	S / P	500	-	HP	-
1013217	F78633S130P300HP	33	1.30	S / P	300	-	HP	-

BASIC PROBES 100 MIL



F786

Up to 5 A | 100 mil | ICT application

Electrical specifications

Current [A]	5
R TYP [mOhm]	<25

Mechanical specifications

Temperature [°C]	-45°...+100°
Preload [cN]	60 60
Spring force [cN] at nt ±20%	150 300
Nominal travel [mm]	6.4 6.4
Maximum travel [mm]	8.0 8.0

Materials and plating

Plunger	BeCu	gold plated
Barrel	Nickel silver	gold plated
Spring	Spring steel	silver plated
Receptacle	Nickel silver	gold plated

Accessories

1035995	H772WW-7.6	Receptacle
1003640	FEWZ-772E0	Insertion tool receptacle
1003566	FDWZ-100	Insertion tool probe


* Overview of other receptacles on page 21

Drill size recommendation (mm)

H772...	With collar	2.02 - 2.03
H772...	Press ring as stop	1.97 - 2.00
H772...	Press ring inserted	2.03 - 2.05

Series drawing

All measurements are in mm.

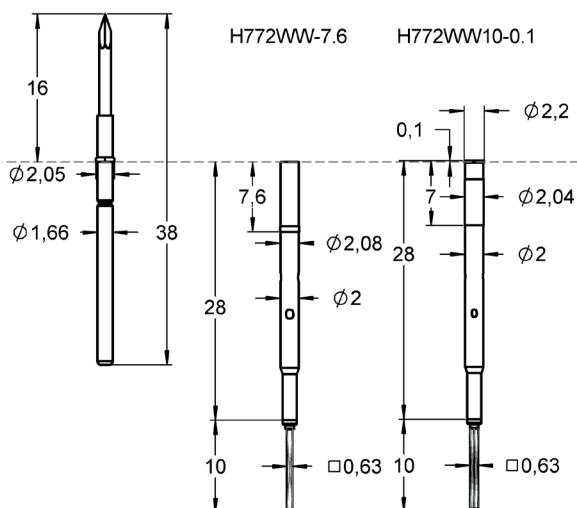

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1001539	F78606B200G150	06	2.00	B / G	150	-	-	-
1001540	F78606B200G300	06	2.00	B / G	300	-	-	-
1083274	F78606B400G300IK06	06	4.00	B / G	300	-	IK06	-

BASIC PROBES 100 MIL

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1001541	F78606B450G150	06 	4.50	B / G	150	-	-	-
1001542	F78606B450G300	06 	4.50	B / G	300	-	-	-
1001543	F78607S200L150	07 	2.00	S / L	150	-	-	-
1001544	F78607S200L300	07 	2.00	S / L	300	-	-	-
1032611	F78610S080L300	10 	0.80	S / L	300	-	-	-
1009223	F78611B130G300	11 	1.30	B / G	300	-	-	-
1001546	F78614S200L300	14 	2.00	S / L	300	-	-	-
1001555	F78615B200G150	15 	2.00	B / G	150	-	-	-
1003131	F78618B130G150	18 	1.30	B / G	150	-	-	-
1003013	F78618B130G300	18 	1.30	B / G	300	-	-	-
1003014	F78621S130L150	21 	1.30	S / L	150	-	-	-
1003015	F78621S130L300	21 	1.30	S / L	300	-	-	-
1003016	F78633S130L150	33 	1.30	S / L	150	-	-	-
1003047	F78633S130L300	33 	1.30	S / L	300	-	-	-
1005680	F78663S200L300	63 	2.00	S / L	300	-	-	-

BASIC PROBES 100 MIL

FM Choice

F772

Up to 5 A | 100 mil | ICT application



Electrical specifications

Current [A]	5
R Typ [mOhm]	<25

Mechanical specifications

Temperature [°C]	-45°...+100°		
Preload [cN]	30	60	60
Spring force [cN] at nt ±20%	80	150	300
Nominal travel [mm]	4.0	4.0	4.0
Maximum travel [mm]	5.0	5.0	5.0

Materials and plating

Plunger	BeCu	gold plated
Barrel	Nickel silver	gold plated
Spring	Spring steel	silver plated
Receptacle	Nickel silver	gold plated


Accessories

1035995	H772WW-7.6	Receptacle
1003640	FEWZ-772E0	Insertion tool receptacle
1003566	FDWZ-100	Insertion tool probe

* Overview of other receptacles on page 21

Series drawing

All measurements are in mm.

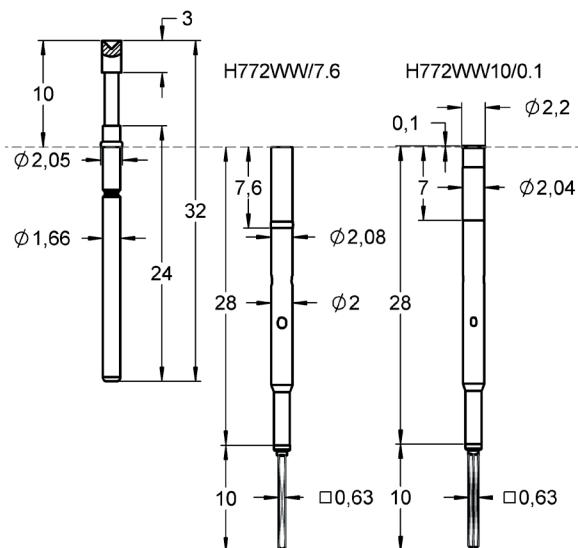

Drill size recommendation (mm)

H772...	With collar	2.02 - 2.03
H772...	Press ring as stop	1.97 - 2.00
H772...	Press ring inserted	2.03 - 2.05

Order code

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1005869	F77203B130G150	03	1.30	B / G	150	-	-	-
1013940	F77203B130G300	03	1.30	B / G	300	-	-	-
1004512	F77205B180G150	05	1.80	B / G	150	-	-	FM Choice
1023838	F77205B180G220	05	1.80	B / G	220	-	-	FM Choice
1035241	F77205B180G220E13	05	1.80	B / G	220	-	E13	-
1007701	F77205B180G300	05	1.80	B / G	300	-	-	FM Choice

BASIC PROBES 100 MIL

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1025309	F77205B200G080	05	2.00	B / G	80	-	-	FM Choice
1001618	F77205B200G150	05	2.00	B / G	150	-	-	FM Choice
1001619	F77205B200G300	05	2.00	B / G	300	-	-	FM Choice
1004513	F77205B250G150	05	2.50	B / G	150	-	-	FM Choice
1007735	F77205B300G150	05	3.00	B / G	150	-	-	-
1005468	F77205B400G150	05	4.00	B / G	150	-	-	-
1001620	F77206B150G150	06	1.50	B / G	150	-	-	FM Choice
1001621	F77206B150G300	06	1.50	B / G	300	-	-	FM Choice
1001622	F77206B150G300H	06	1.50	B / G	300	-	H	FM Choice
1003603	F77206B180G150	06	1.80	B / G	150	-	-	FM Choice
1009365	F77206B180G150E13	06	1.80	B / G	150	-	E13	-
1007349	F77206B180G300	06	1.80	B / G	300	-	-	FM Choice
1009216	F77206B180G300E13	06	1.80	B / G	300	-	E13	-
1001623	F77206B200G150	06	2.00	B / G	150	-	-	FM Choice
1008918	F77206B200G150E15	06	2.00	B / G	150	-	E15	-
1007416	F77206B200G150IK05	06	2.00	B / G	150	-	IK05	-
1009545	F77206B200G220	06	2.00	B / G	220	-	-	FM Choice
1001624	F77206B200G300	06	2.00	B / G	300	-	-	FM Choice
1008337	F77206B200G300E13	06	2.00	B / G	300	-	E13	-
1001625	F77206B200G300H	06	2.00	B / G	300	-	H	FM Choice
1001626	F77206B250G150	06	2.50	B / G	150	-	-	FM Choice
1019475	F77206B250G150H	06	2.50	B / G	150	-	H	FM Choice
1001627	F77206B250G300	06	2.50	B / G	300	-	-	FM Choice
1011255	F77206B250G300E13	06	2.50	B / G	300	-	E13	-
1022677	F77206B250G400	06	2.50	B / G	400	-	-	FM Choice
1001628	F77207S175L150	07	1.75	S / L	150	-	-	-
1001629	F77207S200L150	07	2.00	S / L	150	-	-	FM Choice
1001630	F77207S200L300	07	2.00	S / L	300	-	-	FM Choice
1001631	F77207S200L300H	07	2.00	S / L	300	-	H	FM Choice
1001559	F77210S063N150	10	0.63	S / L	150	-	-	-
1009759	F77211B064G150	11	0.64	B / G	150	-	-	-

BASIC PROBES 100 MIL

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1004514	F77211B070G150	11	0.70	B / G	150	-	-	-
1016741	F77211B100G150	11	1.00	B / G	150	-	-	-
1005870	F77211B130G150	11	1.30	B / G	150	-	-	FM Choice
1035375	F77211B130G300	11	1.30	B / G	300	-	-	FM Choice
1004515	F77212B150G150	12	1.50	B / G	150	-	-	-
1001560	F77212B200G150	12	2.00	B / G	150	-	-	FM Choice
1001561	F77212B200G300	12	2.00	B / G	300	-	-	FM Choice
1001562	F77214S200L150	14	2.00	S / L	150	-	-	-
1001563	F77214S200L300	14	2.00	S / L	300	-	-	-
1001564	F77215B200G150	15	2.00	B / G	150	-	-	FM Choice
1001565	F77215B200G300	15	2.00	B / G	300	-	-	FM Choice
1006747	F77217B200G150	17	2.00	B / G	150	-	-	FM Choice
1008821	F77217B200G300	17	2.00	B / G	300	-	-	FM Choice
1087307	F77217B300G150	17	3.00	B / G	150	-	-	-
1001566	F77218B130G150	18	1.30	B / G	150	-	-	-
1001567	F77218B130G300	18	1.30	B / G	300	-	-	-
1005871	F77218S080N150	18	0.80	B / G	150	-	-	-
1013037	F77221B130G300H	21	1.30	B / G	300	-	H	-
1001568	F77221S130L150	21	1.30	S / L	150	-	-	FM Choice
1001569	F77221S130L300	21	1.30	S / L	300	-	-	FM Choice
1001570	F77228B200G150	28	2.00	B / G	150	-	-	-
1001571	F77228B200G300	28	2.00	B / G	300	-	-	-
1003068	F77230B130G090S1	30	1.30	B / G	90	-	S1	-
1001572	F77230B130G150	30	1.30	B / G	150	-	-	-
1000748	F77232S080L300	32	0.80	S / L	300	-	-	-
1001574	F77233S130L150	33	1.30	S / L	150	-	-	-
1006044	F77233S130L220	33	1.30	S / L	220	-	-	-
1001575	F77233S130L300	33	1.30	S / L	300	-	-	-
1004354	F77233S130R300	33	1.30	S / R	300	-	H	-
1010118	F77263S200L300E11	63	2.00	S / L	300	-	E11	-
1034177	F77263S230L300	63	2.30	S / L	300	-	-	-

BASIC PROBES 100 MIL

FM Choice

F772HP

Up to 5 A | 100 mil | ICT application



Electrical specifications

Current [A]	5
R TYP [mOhm]	<25

Mechanical specifications

Temperature [°C]	-45°...+100°		
Preload [cN]	60	60	200
Spring force [cN] at nt ±20%	150	200	300
Nominal travel [mm]	4.0	4.0	4.0
Maximum travel [mm]	5.0	5.0	5.0

Materials and plating

Plunger	Palladium alloy	unplated
Barrel	Nickel silver	gold plated
Spring	Spring steel	silver plated
Receptacle	Nickel silver	gold plated

Accessories

1035995	H772WW-7.6	Receptacle
1003640	FEWZ-772E0	Insertion tool receptacle
1003566	FDWZ-100	Insertion tool probe


* Overview of other receptacles on page 21

Drill size recommendation (mm)

H772...	With collar	2.02 - 2.03
H772...	Press ring as stop	1.97 - 2.00
H772...	Press ring inserted	2.03 - 2.05

Series drawing

All measurements are in mm.

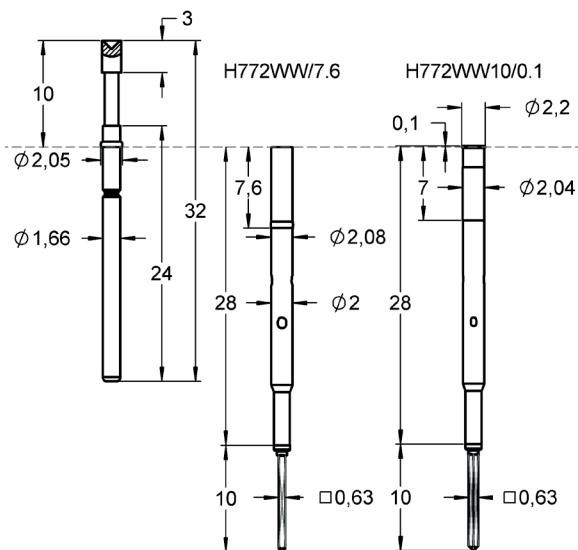

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1094975	F77205S180P150E13	05	1.80	S / P	150	-	E13	FM Choice
1103771	F77233S130P200	33	1.30	S / P	200	-	-	-
1013335	F77233S130P300HP	33	1.30	S / P	300	-	HP	-

BASIC PROBES 100 MIL

FM Choice



F588HP

Up to 5 A | 100 mil | ICT application

Electrical specifications

Current [A]	5
R Typ [mOhm]	<20

Mechanical specifications

Temperature [°C]	-45°...+100°	
Preload [cN]	110	140
Spring force [cN] at nt ±20%	180	300
Nominal travel [mm]	9.3	9.3
Maximum travel [mm]	11.7	11.7

Materials and plating

Plunger	Palladium alloy	unplated
Barrel	Nickel silver	gold plated
Spring	Spring steel	silver plated
Receptacle	Nickel silver	gold plated


Accessories

1010818	H100LA-7.6	Receptacle
1008392	FEWZ-100EV	Insertion tool receptacle
1003566	FDWZ-100	Insertion tool probe

* Overview of other receptacles H100 on page 34+35

Series drawing

All measurements are in mm.

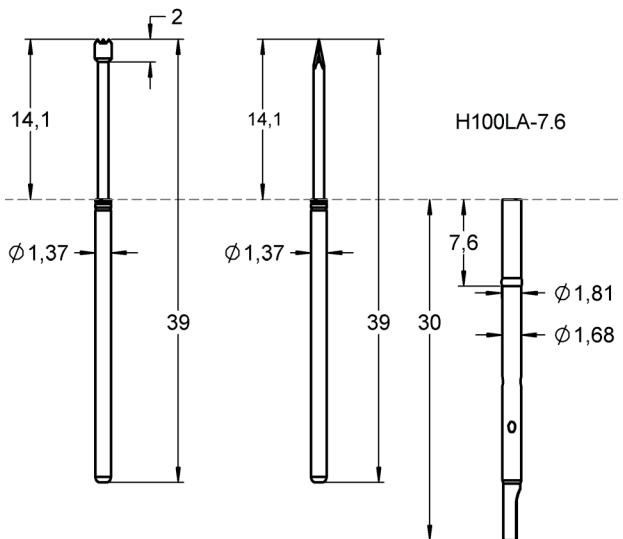

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1019480	F58821S090P300HP	21	0.90	S / P	300	-	HP	-
1013000	F58833S090P300HP	33	0.90	S / P	300	-	HP	FM Choice
1043611	F58833S090P300HPS	33	0.90	S / P	300	-	HPS	FM Choice
1019481	F58837S050P300HP	37	0.50	S / P	300	-	HP	-
1019483	F58866B250P300HP	66	2.50	S / P	300	-	HP	-

BASIC PROBES 100 MIL

FM Choice



F588S

Up to 5 A | 100 mil | ICT application

Electrical specifications

Current [A]	5
R TYP [mOhm]	<20

Mechanical specifications

Temperature [°C]	-45°...+100°
Preload [cN]	80 110
Spring force [cN] at nt ±20%	180 300
Nominal travel [mm]	9.3 9.3
Maximum travel [mm]	11.7 11.7

Materials and plating

Plunger	BeCu	gold plated
Barrel	Nickel silver	gold plated
Spring	Spring steel	silver plated
Receptacle	Nickel silver	gold plated


Accessories

1010818	H100LA-7.6	Receptacle
1008392	FEWZ-100EV	Insertion tool receptacle
1003566	FDWZ-100	Insertion tool probe

* Overview of other receptacles H100 on page 34+35

Series drawing

All measurements are in mm.

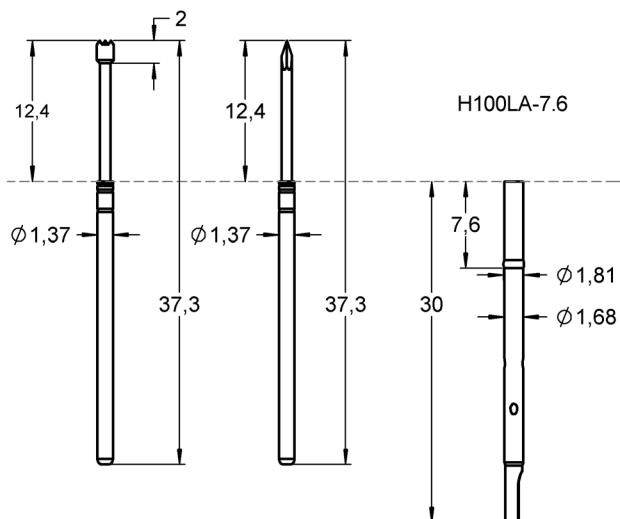

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1007536	F58805B150G180S	05	1.50	B / G	180	-	S	FM Choice
1008846	F58806B150G180S	06	1.50	B / G	180	-	S	FM Choice
1097833	F58806B150P300S	06	1.50	B / P	300	-	S	FM Choice
1043610	F58815B150G180S	15	1.50	B / G	180	-	S	FM Choice
1003164	F58833S090L180S	33	0.90	S / L	180	-	S	FM Choice
1008891	F58833S090L300S	33	0.90	S / L	300	-	S	FM Choice
1016151	F58841B150G300IK04S	41	1.50	B / G	300	-	IK04S	-

BASIC PROBES 100 MIL

FM Choice



F588

Up to 5 A | 100 mil | ICT application

Electrical specifications

Current [A]	5
R TYP [mOhm]	<20

Mechanical specifications

Temperature [°C]	-45°...+100°
Preload [cN]	80 110
Spring force [cN] at nt ±20%	180 300
Nominal travel [mm]	9.3 9.3
Maximum travel [mm]	11.7 11.7

Materials and plating

Plunger	BeCu	gold plated
Barrel	Nickel silver	gold plated
Spring	Spring steel	silver plated
Receptacle	Nickel silver	gold plated


Accessories

1010818	H100LA-7.6	Receptacle
1008392	FEWZ-100EV	Insertion tool receptacle
1003566	FDWZ-100	Insertion tool probe

* Overview of other receptacles H100 on page 34+35

Series drawing

All measurements are in mm.

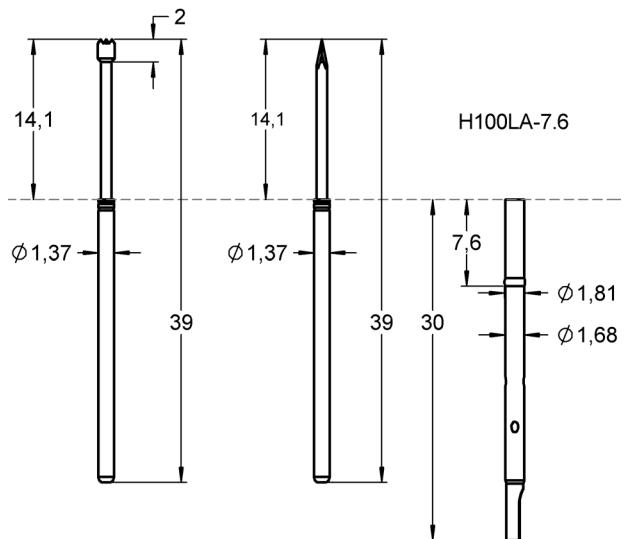

BASIC PROBES 100 MIL

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1001507	F58805B150G180	05 	1.50	B / G	180	-	-	FM Choice
1001508	F58806B150G180	06 	1.50	B / G	180	-	-	FM Choice
1007399	F58806B150G300	06 	1.50	B / G	300	-	-	FM Choice
1000110	F58811B090G180	11 	0.90	B / G	180	-	-	-
1007491	F58812B150G180	12 	1.50	B / G	180	-	-	-
1005813	F58815B150G180	15 	1.50	B / G	180	-	-	FM Choice
1007400	F58815B150G300	15 	1.50	B / G	300	-	-	FM Choice
1001509	F58818B076G180	18 	0.76	B / G	180	-	-	-
1007401	F58818B076G300	18 	0.76	B / G	300	-	-	-
1001510	F58821S076L180	21 	0.76	S / L	180	-	-	-
1007195	F58821S090L180	21 	0.90	S / L	180	-	-	-
1012220	F58821S090L300	21 	0.90	S / L	300	-	-	-
1010465	F58821S090P180	21 	0.90	S / P	180	-	-	-
1001476	F58828B150G180	28 	1.50	B / G	180	-	-	-
1007402	F58828B150G300	28 	1.50	B / G	300	-	-	-
1001477	F58833S076L180	33 	0.76	S / L	180	-	-	FM Choice
1005360	F58833S090L180	33 	0.90	S / L	180	-	-	FM Choice
1007199	F58833S090L300	33 	0.90	S / L	300	-	-	-
1010480	F58833S090P180	33 	0.90	S / P	180	-	-	FM Choice
1041857	F58835S150P300	35 	1.50	S / P	300	-	-	-
1001478	F58836S140L180	36 	1.40	S / L	180	-	-	-
1008855	F58836S140L300	36 	1.40	S / L	300	-	-	-
1007182	F58838S090L180	38 	0.90	S / L	180	-	-	-
1009003	F58841B150G300IK	41 	1.50	B / G	300	-	IK	-
1010469	F58843S090P180	43 	0.90	S / P	180	-	-	-
1004197	F58863B150G180	63 	1.50	B / G	180	-	-	-
1009595	F58863B150G300	63 	1.50	S / L	300	-	-	-

BASIC PROBES 100 MIL



H100

Receptacles | 100 mil |
For Probe types F100, F585, F588

Materials and plating

Receptacle	Nickel silver	gold plated
------------	---------------	-------------

Accessories

1008392	FEWZ-100EV	Insertion tool receptacle
1014264	FEWZ-100EO	Insertion tool receptacle


Drill size recommendation (mm)

H100...	Press ring as stop	1.67 - 1.69
H100...	Press ring inserted	1.70 - 1.75

Order code	Product name	Press ring position [mm]	CXN
1010853	H100CR-2.0	2.0	CR
1010815	H100CR-7.6	7.6	CR
1010817	H100CR-10.0	10.0	CR
1010816	H100LA-2.0	2.0	LA
1010818	H100LA-7.6	7.6	LA
1010829	H100WW10-2.0	2.0	WW
1010822	H100WW10-7.6	7.6	WW
1010823	H100WW10-10.0	10.0	WW
1010831	H100WW19-7.6	7.6	WW

Series drawing

All measurements are in mm.

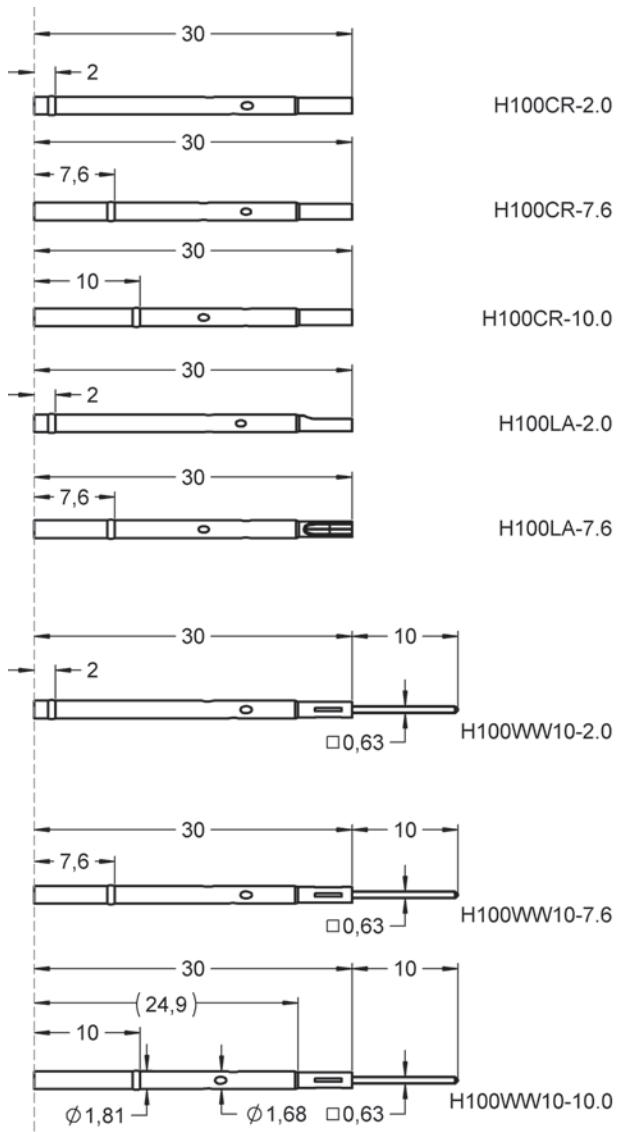

The insertion depth 24.9 mm and outer diameter are the same for all receptacles shown above. Different dimensions are listed.

BASIC PROBES 100 MIL



H100

Receptacles | 100 mil |
For Probe types F100, F585, F588

Materials and plating

Receptacle	Nickel silver	gold plated
------------	---------------	-------------

Accessories

1008392	FEWZ-100EV	Insertion tool receptacle
1014264	FEWZ-100EO	Insertion tool receptacle


Drill size recommendation (mm)

H100...	Press ring as stop	1.67 - 1.69
H100...	Press ring inserted	1.70 - 1.75

Order code	Product name	Press ring position [mm]	CXN
1023581	H100WR10-7.6	7.6	WR
1014852	H100WW05-2.0	2.0	WW
1100025	H100WW05-7.6S1	7.6	WW
1010830	H100WW10-2.0S1	2.0	WW
1092162	H100WW10-2.0AT	2.0	WW
1092165	H100WW10-7.6AT	7.6	WW
1092174	H100WW10-10.0AT	10.0	WW
1012174	H100WL11-7.6	7.6	WL

Series drawing

All measurements are in mm.

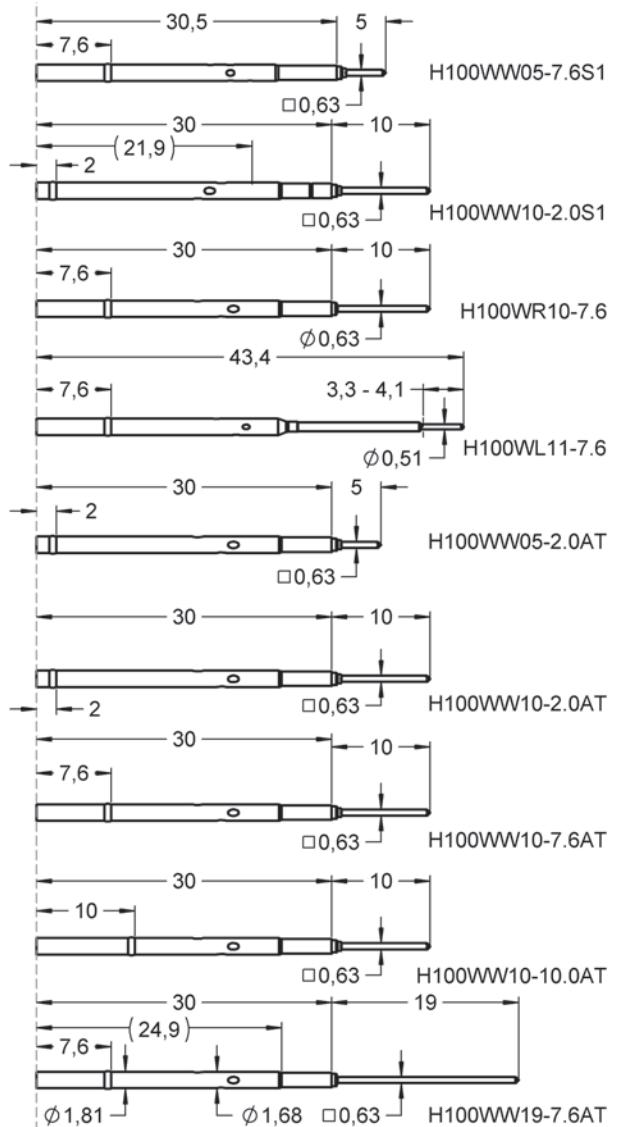

The insertion depth 24.9 mm and outer diameter are the same for all receptacles shown above. Different dimensions are listed.

BASIC PROBES 100 MIL

FM Choice



F100

Up to 5 A | 100 mil | ICT application

Electrical specifications

Current [A]	5
R TYP [mOhm]	<20

Mechanical specifications

Temperature [°C]	-45°...+100°		
Preload [cN]	80	80	150
Spring force [cN] at nt ±20%	150	200	300
Nominal travel [mm]	4.3	4.3	4.3
Maximum travel [mm]	6.4	6.4	6.4

Materials and plating

Plunger	BeCu	gold plated
Barrel	Nickel silver	gold plated
Spring	Spring steel	silver plated
Receptacle	Nickel silver	gold plated

Accessories

1010818	H100LA-7.6	Receptacle
1008392	FEWZ-100EV	Insertion tool receptacle
1003566	FDWZ-100	Insertion tool probe

* Overview of other receptacles H100 on page 34+35


Drill size recommendation (mm)

H100...	Press ring as stop	1.67 - 1.69
H100...	Press ring inserted	1.70 - 1.75

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1043597	F10002B170G200	02	1.50	B / G	180	-	-	FM Choice
1017531	F10005B150G150	05	1.50	B / G	180	-	-	FM Choice
1011718	F10005B150G200	05	1.50	B / G	300	-	-	FM Choice
1038949	F10005B150G200H	05	0.90	B / G	180	-	-	FM Choice

Series drawing

All measurements are in mm.

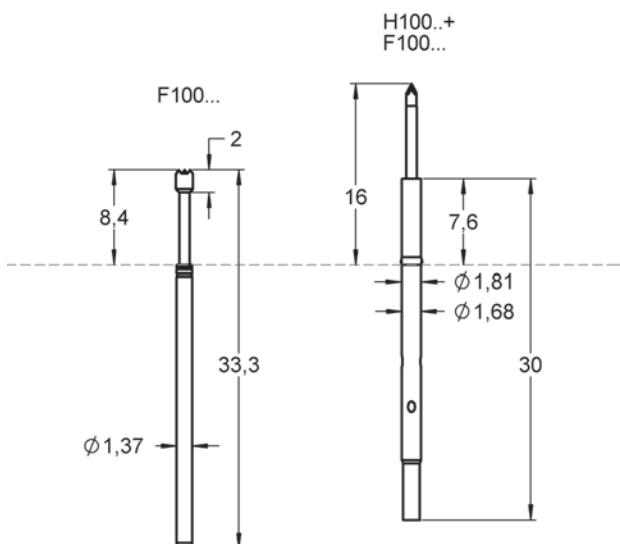

BASIC PROBES 100 MIL

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1011717	F10005B150G300	05 	1.50	B / G	180	-	-	FM Choice
1100496	F10005B200G200	05 	2.00	B / G	200	-	-	-
1017563	F10006B130G150	06 	1.30	B / G	150	-	-	FM Choice
1012285	F10006B130G200	06 	1.30	B / G	200	-	-	FM Choice
1043598	F10006B130G200H	06 	1.30	B / G	200	-	H	FM Choice
1012286	F10006B130G300	06 	1.30	S / L	300	-	-	FM Choice
1006750	F10006B150G150	06 	1.50	S / L	150	-	-	-
1013049	F10006B150G200	06 	1.50	S / L	200	-	-	FM Choice
1013692	F10006B150G200H	06 	1.50	S / P	200	-	H	FM Choice
1013033	F10006B150G200IK04	06 	1.50	B / G	200	-	IK04	FM Choice
1010698	F10006B150G300	06 	1.50	B / G	300	-	-	FM Choice
1013034	F10006B150G300IK04	06 	1.50	S / L	300	-	IK04	FM Choice
1012591	F10006B200G150	06 	2.00	S / L	150	-	-	FM Choice
1012592	F10006B200G200	06 	2.00	S / L	200	-	-	FM Choice
1011380	F10006B200G200IK04	06 	2.00	S / P	200	-	IK04	FM Choice
1012593	F10006B200G300	06 	2.00	S / P	300	-	-	FM Choice
1011381	F10006B200G300IK04	06 	2.00	S / L	300	-	IK04	FM Choice
1017533	F10006B250G150	06 	2.50	S / L	150	-	-	FM Choice
1013012	F10006B250G200	06 	2.50	S / L	200	-	-	FM Choice
1011395	F10006B250G300	06 	2.50	B / G	300	-	-	FM Choice
1040167	F10006B250G400	06 	2.50	B / G	400	-	-	FM Choice
1017163	F10006B300G200	06 	3.00	B / G	200	-	-	-
1007901	F10006B300G300	06 	3.00	B / G	300	-	-	-
1011177	F10006B350G300IK04	06 	3.50	B / G	300	-	IK04	-
1014750	F10006B350G300IK10	06 	3.50	B / G	300	-	IK10	-
1017390	F10006B400G200	06 	4.00	B / G	200	-	-	-
1014046	F10006B400G300	06 	4.00	B / G	300	-	-	-
1011982	F10007S150L200	07 	1.50	S / L	200	-	-	FM Choice
1011983	F10007S150L200H	07 	1.50	S / L	200	-	H	FM Choice
1011984	F10007S150L300	07 	1.50	S / L	300	-	-	FM Choice
1011853	F10007S170L200	07 	1.70	S / L	200	-	-	FM Choice
1011111	F10007S170L300	07 	1.70	S / L	300	-	-	FM Choice

BASIC PROBES 100 MIL

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1004257	F10010S060L150	10 	0.60	S / L	150	-	-	FM Choice
1017643	F10010S060L150RP	10 	0.60	S / L	150	-	RP	-
1004028	F10010S060L200	10 	0.60	S / L	200	-	-	FM Choice
1004175	F10010S060L300	10 	0.60	S / L	300	-	-	FM Choice
1017164	F10011B050G200	11 	0.50	B / G	200	-	-	-
1018364	F10011B064G150	11 	0.64	B / G	150	-	-	FM Choice
1011581	F10011B064G200	11 	0.64	B / G	200	-	-	FM Choice
1008017	F10011B064G300	11 	0.64	B / G	300	-	-	FM Choice
1017534	F10011B090G150	11 	0.90	B / G	150	-	-	FM Choice
1013006	F10011B090G200H	11 	0.90	S / L	200	-	H	FM Choice
1011836	F10011B090G300	11 	0.90	S / L	300	-	-	FM Choice
1017697	F10011B090G400	11 	0.90	S / L	400	-	-	FM Choice
1092030	F10012B130G200	12 	1.30	S / P	200	-	-	-
1017710	F10012B150G150	12 	1.50	B / G	150	-	-	FM Choice
1016668	F10012B150G200	12 	1.50	B / G	200	-	-	FM Choice
1016669	F10012B150G300	12 	1.50	S / L	300	-	-	FM Choice
1017536	F10014B130G150	14 	1.30	S / L	150	-	-	FM Choice
1011719	F10014B130G200	14 	1.30	S / L	200	-	-	FM Choice
1011667	F10014B130G300	14 	1.30	S / P	300	-	-	FM Choice
1011007	F10014B150G200	14 	1.50	S / P	200	-	-	FM Choice
1011008	F10014B150G300	14 	1.50	S / L	300	-	-	FM Choice
1017696	F10014B150G400	14 	1.50	S / L	400	-	-	FM Choice
1012769	F10014S130L150	14 	1.30	S / L	150	-	-	FM Choice
1012782	F10014S130L200	14 	1.30	S / L	200	-	-	FM Choice
1012783	F10014S130L200H	14 	1.30	S / L	200	-	H	FM Choice
1012784	F10014S130L300	14 	1.30	S / L	300	-	-	FM Choice
1057662	F10014S130L400	14 	1.30	S / L	400	-	-	FM Choice
1017695	F10014S150L150	14 	1.50	S / L	150	-	-	FM Choice
1013478	F10014S150L200	14 	1.50	S / L	200	-	-	FM Choice
1013479	F10014S150L200H	14 	1.50	S / L	200	-	H	FM Choice
1013480	F10014S150L300	14 	1.50	S / L	300	-	-	FM Choice
1017757	F10014S150L300HP	14 	1.50	S / L	300	-	HP	FM Choice

BASIC PROBES 100 MIL

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1017540	F10015B150G150	15 	1.50	B / G	150	-	-	-
1013342	F10015B150G200	15 	1.50	B / G	200	-	-	-
1013343	F10015B150G300	15 	1.50	B / G	300	-	-	FM Choice
1011890	F10015B170G200	15 	1.70	B / G	200	-	-	FM Choice
1011891	F10015B170G300	15 	1.70	B / G	300	-	-	FM Choice
1014374	F10015B250G200	15 	2.50	B / G	200	-	-	FM Choice
1014375	F10015B250G300	15 	2.50	B / G	300	-	-	FM Choice
1043600	F10015B300G200	15 	3.00	B / G	200	-	-	-
1011261	F10016B075G200	16 	0.75	B / G	200	-	-	-
1023670	F10017B150G300	17 	1.50	B / G	300	-	-	FM Choice
1015133	F10017B200G200	17 	2.00	B / G	200	-	-	FM Choice
1015247	F10017B200G200H	17 	2.00	B / G	200	-	H	FM Choice
1017542	F10018B090G150	18 	0.90	B / G	150	-	-	FM Choice
1012175	F10018B090G200	18 	0.90	B / G	200	-	-	FM Choice
1011512	F10018B090G300	18 	0.90	B / G	300	-	-	FM Choice
1044769	F10021B090G200	21 	0.90	B / G	200	-	-	FM Choice
1032056	F10021B090G200H	21 	0.90	B / G	200	-	H	FM Choice
1017543	F10021S090L150	21 	0.90	S / L	150	-	-	FM Choice
1012135	F10021S090L200	21 	0.90	S / L	200	-	-	FM Choice
1007251	F10021S090L300	21 	0.90	S / L	300	-	-	-
1017544	F10030B090G150	30 	0.90	B / G	150	-	-	FM Choice
1057663	F10030B090G200	30 	0.90	B / G	200	-	-	-
1007849	F10030B090G300	30 	0.90	B / G	300	-	-	FM Choice
1006272	F10033S090L150	33 	0.90	S / L	150	-	-	-
1006813	F10033S090L200	33 	0.90	S / L	200	-	-	FM Choice
1012860	F10033S090L200H	33 	0.90	S / L	200	-	H	FM Choice
1001150	F10033S090L200HP	33 	0.90	S / L	200	-	HP	FM Choice
1006541	F10033S090L300	33 	0.90	S / L	300	-	-	FM Choice
1016732	F10033S150L300	33 	1.50	S / L	300	-	-	FM Choice
1004187	F10035S150L200	35 	1.50	S / L	200	-	-	FM Choice
1004276	F10035S150L300	35 	1.50	S / L	300	-	-	FM Choice

BASIC PROBES 100 MIL

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1100640	F10036S130L150	36 	1.30	S / L	150	-	-	FM Choice
1013145	F10036S130L200	36 	1.30	S / L	200	-	-	FM Choice
1013146	F10036S130L300	36 	1.30	S / L	300	-	-	FM Choice
1008651	F10037S050L200	37 	0.50	S / L	200	-	-	FM Choice
1007223	F10037S050L300	37 	0.50	S / L	300	-	-	FM Choice
1057664	F10038S090L150	38 	0.90	S / L	150	-	-	FM Choice
1006498	F10038S090L200	38 	0.90	S / L	200	-	-	FM Choice
1007709	F10038S090L300	38 	0.90	S / L	300	-	-	FM Choice
1012765	F10041B150G200IK04	41 	1.50	B / G	200	-	IK04	-
1012770	F10041B150G300IK04	41 	1.50	B / G	300	-	IK04	-
1017547	F10043S090L150	43 	0.90	S / L	150	-	-	FM Choice
1006908	F10043S090L200	43 	0.90	S / L	200	-	-	FM Choice
1007696	F10043S090L300	43 	0.90	S / L	300	-	-	FM Choice
1036161	F10043S090L300H	43 	0.90	S / L	300	-	H	FM Choice
1032170	F10053S090L300	53 	0.90	S / L	300	-	-	FM Choice
1017464	F10055B180G200	55 	1.80	B / G	200	-	-	-
1020072	F10055B180G200H	55 	1.80	B / G	200	-	H	FM Choice
1014197	F10060B046G200	60 	0.46	B / G	200	-	-	-
1013020	F10062B090G200	62 	0.90	B / G	200	-	-	FM Choice
1013022	F10062B090G300	62 	0.90	B / G	300	-	-	FM Choice
1017562	F10063B150G150	63 	1.50	B / G	150	-	-	FM Choice
1013103	F10063B150G200	63 	1.50	B / G	200	-	-	FM Choice
1013104	F10063B150G300	63 	1.50	B / G	300	-	-	FM Choice
1000078	F10068S150L200	68 	1.50	S / L	200	-	-	-
1091896	F10068S150L300	68 	1.50	S / L	300	-	-	-

BASIC PROBES 100 MIL

FM Choice



F100L

Up to 5 A | 100 mil | ICT application

Electrical specifications

Current [A]	5
R TYP [mOhm]	<20

Mechanical specifications

Temperature [°C]	-45°...+100°		
Preload [cN]	80	80	150
Spring force [cN] at nt ±20%	150	200	300
Nominal travel [mm]	4.3	4.3	4.3
Maximum travel [mm]	6.4	6.4	6.4

Materials and plating

Plunger	BeCu	gold plated
Barrel	Nickel silver	gold plated
Spring	Spring steel	silver plated
Receptacle	Nickel silver	gold plated

Accessories

1010818	H100LA-7.6	Receptacle
1008392	FEWZ-100EV	Insertion tool receptacle
1003566	FDWZ-100	Insertion tool probe

* Overview of other receptacles H100 on page 34+35


Drill size recommendation (mm)

H100...	Press ring as stop	1.67 - 1.69
H100...	Press ring inserted	1.70 - 1.75

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1012204	F10006B150G150L	06	1.50	B / G	150	-	L	FM Choice
1052629	F10006B150G150ML	06	1.50	B / G	150	-	ML	-
1012205	F10006B150G200L	06	1.50	B / G	200	-	L	FM Choice
1012206	F10006B150G300L	06	1.50	S / L	300	-	L	FM Choice

Series drawing

All measurements are in mm.

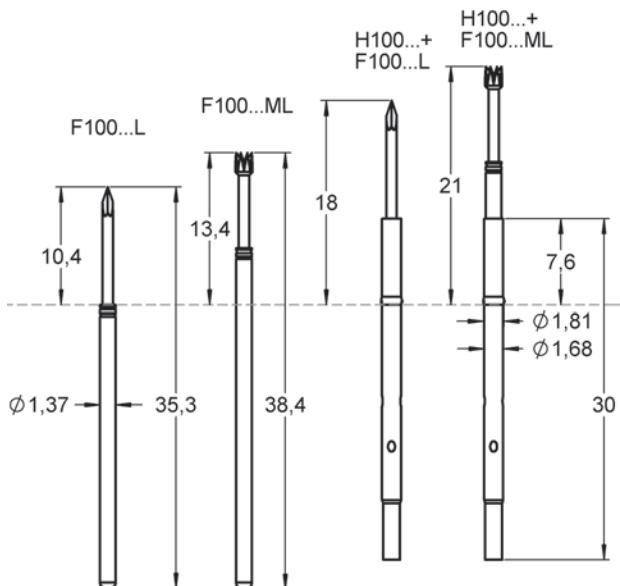

BASIC PROBES 100 MIL

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1044864	F10011B064G150L	11 	0.64	B / G	150	-	L	FM Choice
1017535	F10011B090G150L	11 	0.90	B / G	150	-	L	FM Choice
1044635	F10011B090G200L	11 	0.90	B / G	200	-	L	FM Choice
1039198	F10011B090G300L	11 	0.90	B / G	300	-	L	FM Choice
1000535	F10014S130L150L	14 	1.30	S / L	150	-	L	FM Choice
1017541	F10015B150G150L	15 	1.50	B / G	150	-	L	FM Choice
1015802	F10015B150G200L	15 	1.50	B / G	200	-	L	FM Choice
1013905	F10015B150G300L	15 	1.50	B / G	300	-	L	FM Choice
1007501	F10021S090L300L	21 	0.90	S / L	300	-	L	FM Choice
1004705	F10033S090L150L	33 	0.90	S / L	150	-	L	FM Choice
1004658	F10033S090L200L	33 	0.90	S / L	200	-	L	FM Choice
1006713	F10033S090L300L	33 	0.90	S / L	300	-	L	FM Choice
1017546	F10037S050L150L	37 	0.50	S / L	150	-	L	FM Choice
1007502	F10037S050L300L	37 	0.50	S / L	300	-	L	FM Choice
1026472	F10053S090L300L	53 	0.90	S / L	300	-	L	FM Choice
1018654	F10055B180G300HL	55 	1.80	B / G	300	-	HL	FM Choice

BASIC PROBES 100 MIL

FM Choice



F100HPL

Up to 5 A | 100 mil | ICT application

Electrical specifications

Current [A]	5
R Typ [mOhm]	<20

Mechanical specifications

Temperature [°C]	-45°...+100°		
Preload [cN]	75	130	200
Spring force [cN] at nt ±20%	130	200	300
Nominal travel [mm]	4.3	4.3	4.3
Maximum travel [mm]	6.4	6.4	6.4

Materials and plating

Plunger	BeCu	gold plated
Barrel	Nickel silver	gold plated
Spring	Spring steel	silver plated
Receptacle	Nickel silver	gold plated

Accessories

1010818	H100LA-7.6	Receptacle
1008392	FEWZ-100EV	Insertion tool receptacle
1003566	FDWZ-100	Insertion tool probe


* Overview of other receptacles H100 on page 34+35

Drill size recommendation (mm)

H100...	Press ring as stop	1.67 - 1.69
H100...	Press ring inserted	1.70 - 1.75

Series drawing

All measurements are in mm.

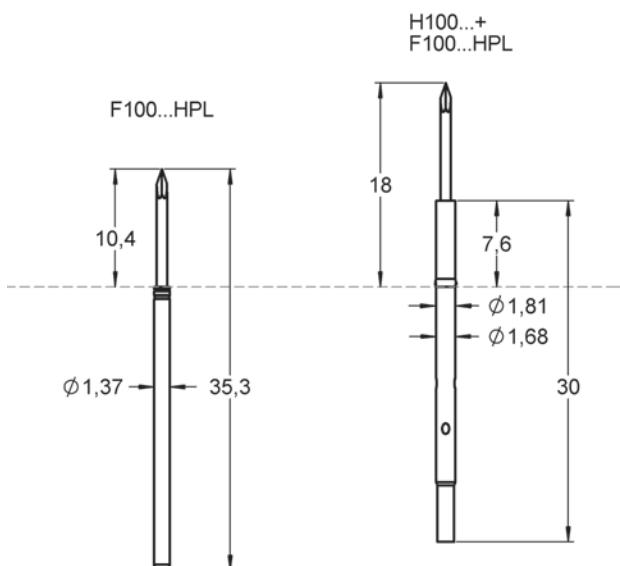

BASIC PROBES 100 MIL

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1017051	F10014S150L200HPL	14 	1.50	S / L	200	-	HPL	FM Choice
1010318	F10021S090P200HPL	21 	0.90	S / P	200	-	HPL	FM Choice
1010320	F10021S090P300HPL	21 	0.90	S / P	300	-	HPL	FM Choice
1014294	F10032S090P300HPL	32 	0.90	S / P	300	-	HPL	FM Choice
1020073	F10033S090L200HPL	33 	0.90	S / L	200	-	HPL	FM Choice
1017908	F10033S090P130HPL	33 	0.90	S / P	130	-	HPL	FM Choice
1010258	F10033S090P200HPL	33 	0.90	S / P	200	-	HPL	FM Choice
1010324	F10033S090P300HPL	33 	0.90	S / P	300	-	HPL	FM Choice
1010319	F10043S090P200HPL	43 	0.90	S / P	200	-	HPL	FM Choice
1010325	F10062S090P300HPL	62 	0.90	S / P	300	-	HPL	FM Choice

BASIC PROBES 100 MIL

FM Choice



F100HP

Up to 5 A | 100 mil | ICT application

Electrical specifications

Current [A]	5
R TYP [mOhm]	<20

Mechanical specifications

Temperature [°C]	-45°...+100°		
Preload [cN]	110	130	200
Spring force [cN] at nt ±20%	150	200	300
Nominal travel [mm]	4.3	4.3	4.3
Maximum travel [mm]	6.4	6.4	6.4

Materials and plating

Plunger	BeCu	gold plated
Barrel	Nickel silver	gold plated
Spring	Spring steel	silver plated
Receptacle	Nickel silver	gold plated

Accessories

1010818	H100LA-7.6	Receptacle
1008392	FEWZ-100EV	Insertion tool receptacle
1003566	FDWZ-100	Insertion tool probe

* Overview of other receptacles H100 on page 34+35


Drill size recommendation (mm)

H100...	Press ring as stop	1.67 - 1.69
H100...	Press ring inserted	1.70 - 1.75

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1135349	F10005B200P200HP	05	2.00	B / P	200	-	HP	FM Choice
1018941	F10006B150P300	06	1.50	B / P	300	-	-	FM Choice
1019980	F10006B200P300HP	06	2.00	B / P	300	-	HP	FM Choice

Series drawing

All measurements are in mm.

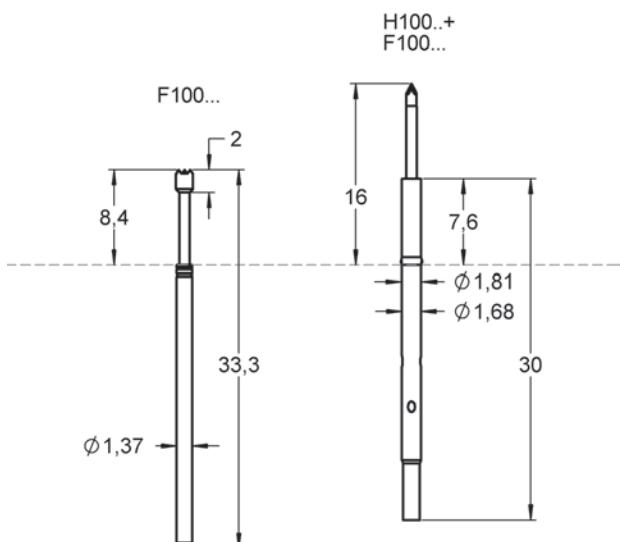

BASIC PROBES 100 MIL

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1030188	F10006B150P300IK03	06	1.50	B / P	300	-	IK03	FM Choice
1017617	F10010S060P150HPPR	10	0.60	S / P	150	-	HPPR	-
1026144	F10010S060P300	10	0.60	S / P	300	-	-	FM Choice
1039808	F10010S060P300HP	10	0.60	S / P	300	-	HP	FM Choice
1034707	F10011B090P300	11	0.90	B / P	300	-	-	FM Choice
1137199	F10014S150P200HP	14	1.50	S / P	200	-	HP	-
1001170	F10014S150P300HP	14	1.50	S / P	300	-	HP	FM Choice
1040481	F10015B150P150HP	15	1.50	B / P	150	-	HP	FM Choice
1026140	F10015B150P300	15	1.50	B / P	300	-	-	FM Choice
1036642	F10015B150P300HP	15	1.50	B / P	300	-	HP	FM Choice
1010207	F10021S090P200HP	21	0.90	S / P	200	-	HP	FM Choice
1010160	F10021S090P300HP	21	0.90	S / P	300	-	HP	FM Choice
1014293	F10032S090P300HP	32	0.90	S / P	300	-	HP	FM Choice
1018693	F10033S090P150HP	33	0.90	S / P	150	-	HP	FM Choice
1010205	F10033S090P200HP	33	0.90	S / P	200	-	HP	FM Choice
1026187	F10033S090P300	33	0.90	S / P	300	-	-	FM Choice
1009991	F10033S090P300HP	33	0.90	S / P	300	-	HP	FM Choice
1038017	F10035S150P200HP	35	1.50	S / P	200	-	HP	FM Choice
1036218	F10035S150P300	35	1.50	S / P	300	-	-	FM Choice
1036217	F10035S150P300HP	35	1.50	S / P	300	-	HP	FM Choice
1135612	F10037S050P200HP	37	0.50	S / P	200	-	HP	FM Choice
1014768	F10037S050P300HP	37	0.50	S / P	300	-	HP	FM Choice
1132220	F10038S090P300HP	38	0.90	S / P	300	-	HP	-
1010206	F10043S090P200HP	43	0.90	S / P	200	-	HP	FM Choice
1010165	F10043S090P300HP	43	0.90	S / P	300	-	HP	FM Choice
1137813	F10054S157P200HP	54	1.57	S / P	200	-	HP	-
1015552	F10062S090P150HP	62	0.90	S / P	150	-	HP	FM Choice
1010208	F10062S090P200HP	62	0.90	S / P	200	-	HP	FM Choice
1010167	F10062S090P300HP	62	0.90	S / P	300	-	HP	FM Choice
1137408	F10063B150P200HP	63	1.50	B / P	200	-	HP	FM Choice

BASIC PROBES 100 MIL



F771

Up to 5 A | 100 mil | Limited space

Electrical specifications

Current [A]	5
R TYP [mOhm]	<20

Mechanical specifications

Temperature [°C]	-45°...+100°
Preload [cN]	50 100
Spring force [cN] at nt ±20%	150 300
Nominal travel [mm]	3.5 3.5
Maximum travel [mm]	4.4 4.4

Materials and plating

Plunger	BeCu	gold plated
Barrel	Nickel silver	gold plated
Spring	Spring steel	silver plated
Receptacle	Nickel silver	gold plated


Accessories

1008392	FEWZ-100EV	Insertion tool receptacle
1003566	FDWZ-100	Insertion tool probe

* Overview of other receptacles H502 on page 48

Series drawing

All measurements are in mm.

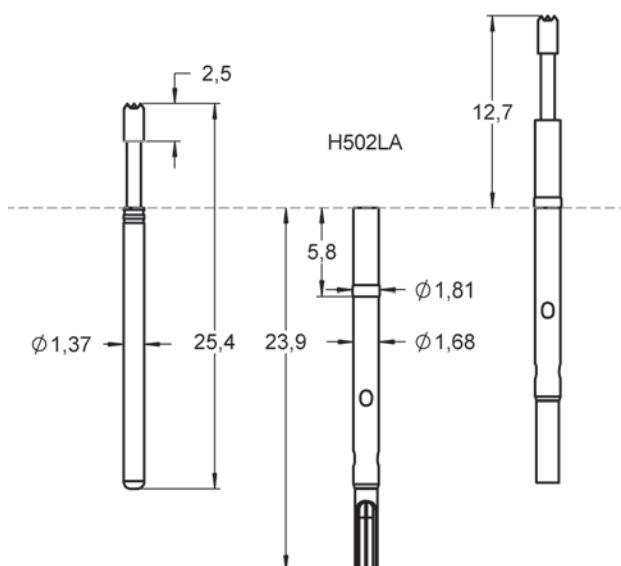

Drill size recommendation (mm)

H502...	press ring as stop	1.67 - 1.69
H502...	press ring inserted	1.70 - 1.75

Order code

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1007914	F77105B180G150	05	1.80	B / G	150	-	-	-
1007530	F77106B130G150	06	1.30	B / G	150	-	-	-
1007529	F77106B180G150	06	1.80	B / G	150	-	-	-
1007527	F77111B065G150	11	0.65	B / G	150	-	-	-
1007528	F77111B075G150	11	0.75	B / G	150	-	-	-
1043630	F77111B075G300	11	0.75	B / G	300	-	-	-
1007532	F77115B180G150	15	1.80	B / G	150	-	-	-
1043631	F77117B180G150	17	1.80	B / G	150	-	-	-

BASIC PROBES 100 MIL



Materials and plating

Receptacle Nickel silver gold plated

Accessories

1008392	FEWZ-100EV	Insertion tool receptacle
1014264	FEWZ-100EO	Insertion tool receptacle

Drill size recommendation (mm)

H502...	Press ring as stop	1.67 - 1.69
H502...	Press ring inserted	1.70 - 1.75


Order code	Product name	Press ring position [mm]	CXN
1001699	H502CR	5.8	CR
1001700	H502LA	5.8	LA
1001702	H502WW	5.8	WW
1018682	H502WR	5.8	WR
1001701	H502LI	5.8	LI
1003099	H502S1	5.8	-
1006520	H502IS	0.2	-

H502

Receptacles | 100 mil |
For Probe types F771, F562

Series drawing

All measurements are in mm.

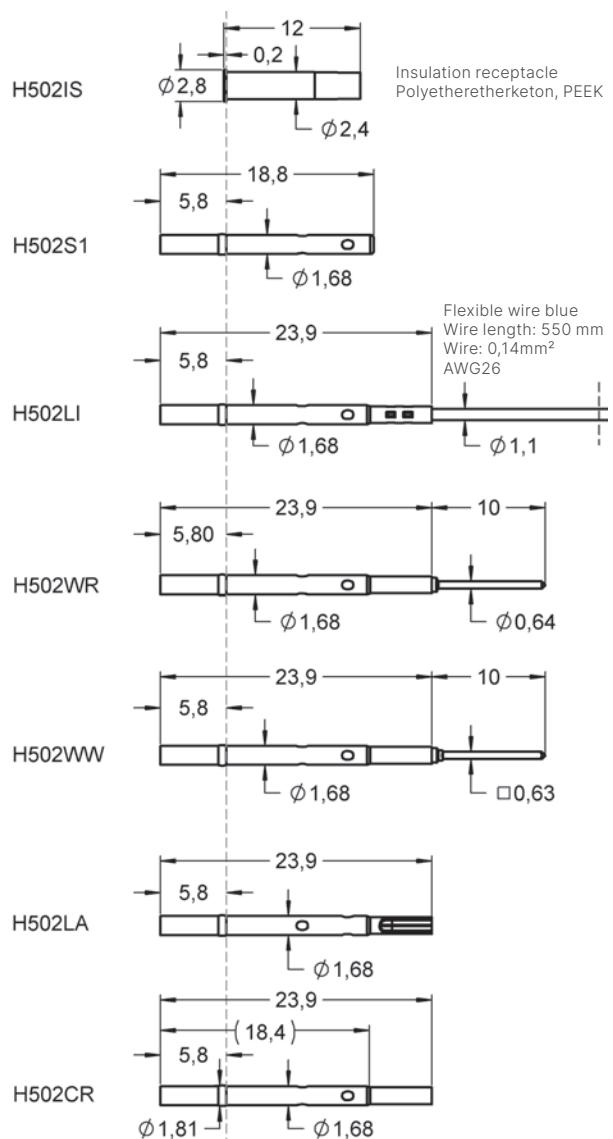

The insertion depth 18.4 mm and outer diameter are the same for all receptacles shown above. Different dimensions are listed.

BASIC PROBES 100 MIL



F562H

Up to 5 A | 100 mil | Limited space

Electrical specifications

Current [A]	5
R Typ [mOhm]	<20

Mechanical specifications

Temperature [°C]	-45°...+200°
Preload [cN]	60 100
Spring force [cN] at nt ±20%	150 200
Nominal travel [mm]	2.7 2.7
Maximum travel [mm]	4.1 4.1

Materials and plating

Plunger	Steel	longtime gold plated
Barrel	Nickel silver	gold plated
Spring	Stainless steel	gold plated
Receptacle	Nickel silver	gold plated

Accessories

1001700	H502LA	Receptacle
1008392	FEWZ-100EV	Insertion tool receptacle
1003566	FDWZ-100	Insertion tool probe

* Overview of other receptacles H502 on page 48


Drill size recommendation (mm)

H502...	press ring as stop	1.67 - 1.69
H502...	press ring inserted	1.70 - 1.75

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1027188	F56205S190L150H	05	1.90	S / L	150	-	H	-
1024575	F56214S250L200H	14	2.50	S / L	200	-	H	-
1036073	F56221S076L150H	21	0.76	S / L	150	-	H	-

Series drawing

All measurements are in mm.

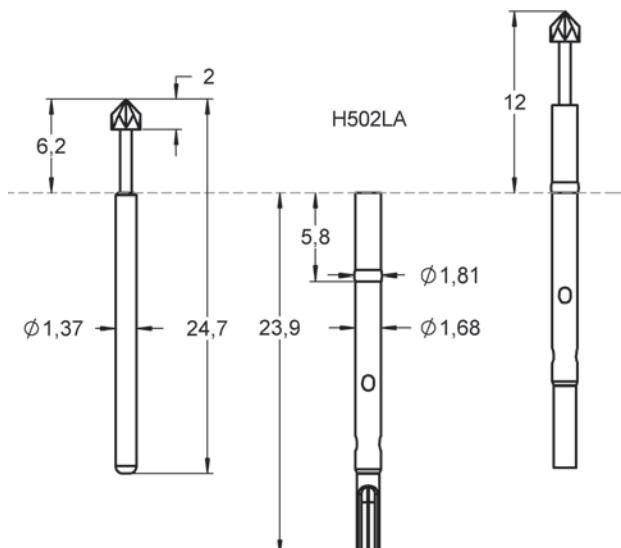

BASIC PROBES 100 MIL



F562

Up to 5 A | 100 mil | Limited space

Electrical specifications

Current [A]	5
R Typ [mOhm]	<20

Mechanical specifications

Temperature [°C]	-45°...+100°		
Preload [cN]	60	60	60
Spring force [cN] at nt ±20%	100	150	200
Nominal travel [mm]	2.7	2.7	2.7
Maximum travel [mm]	4.1	4.1	4.1

Materials and plating

Plunger	BeCu	gold plated
	Steel	longtime gold plated
Barrel	Nickel silver	gold plated
Spring	Spring steel	silver plated
Receptacle	Nickel silver	gold plated

Accessories

1001700	H502LA	Receptacle
1008392	FEWZ-100EV	Insertion tool receptacle
1003566	FDWZ-100	Insertion tool probe


* Overview of other receptacles H502 on page 48

Drill size recommendation (mm)

H502...	press ring as stop	1.67 - 1.69
H502...	press ring inserted	1.70 - 1.75

Series drawing

All measurements are in mm.

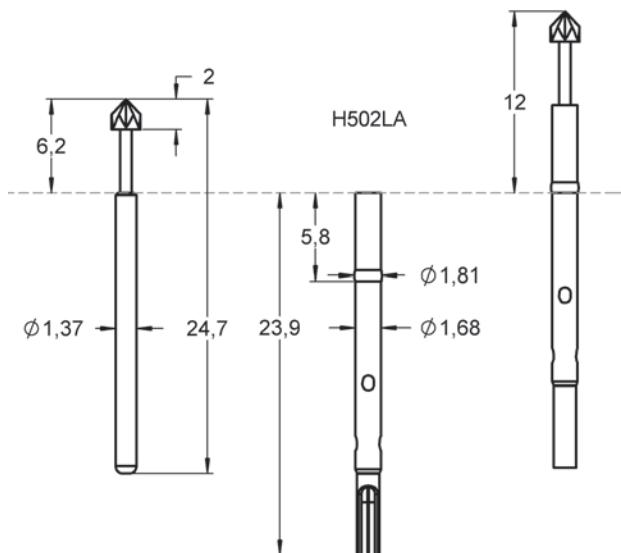

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1016098	F56205S190L100	05	1.90	S / L	100	-	-	-
1001346	F56205S190L150	05	1.90	S / L	150	-	-	-
1001347	F56205S190L200	05	1.90	S / L	200	-	-	-

BASIC PROBES 100 MIL

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1003070	F56204B190G150	04 	1.90	B / G	150	-	-	-
1001348	F56206B190G100	06 	1.90	B / G	100	-	-	-
1001317	F56206B190G150	06 	1.90	B / G	150	-	-	-
1001318	F56206B190G200	06 	1.90	B / G	200	-	-	-
1001319	F56207S190L150	07 	1.90	S / L	150	-	-	-
1016099	F56212B190G100	12 	1.90	B / G	100	-	-	-
1001320	F56214S190L150	14 	1.90	S / L	150	-	-	-
1001321	F56214S190L200	14 	1.90	S / L	200	-	-	-
1001322	F56215B190G100	15 	1.90	B / G	100	-	-	-
1001323	F56215B190G150	15 	1.90	B / G	150	-	-	-
1001324	F56215B190G200	15 	1.90	B / G	200	-	-	-
1019610	F56218B076G100	18 	0.76	B / G	100	-	-	-
1001325	F56218B076G150	18 	0.76	B / G	150	-	-	-
1001326	F56218B076G200	18 	0.76	B / G	200	-	-	-
1001327	F56221S076L150	21 	0.76	S / L	150	-	-	-

BASIC PROBES 75 MIL



H075

Receptacles | 075 mil |
For Probe types F075, F703, F793

Materials and plating

Receptacle	Brass	gold plated
------------	-------	-------------

Accessories

1008325	FEWZ-075EV	Insertion tool receptacle
1014311	FEWZ-075E0	Insertion tool receptacle


Drill size recommendation (mm)

H075...	Press ring as stop	1.29 - 1.30
H075...	Press ring inserted	1.36 - 1.40

Order code	Product name	Press ring position [mm]	CXN
1010806	H075CR-2.0	2.0	CR
1010805	H075CR-7.6	7.6	CR
1010807	H075CR-10.0	10.0	CR
1013135	H075LA-2.0	2.0	LA
1010808	H075LA-7.6	7.6	LA
1010827	H075WW10-2.0	7.6	WW
1010826	H075WW10-7.6	7.6	WW
1010836	H075WW19-7.6	10.0	WW
1010835	H075WW10-10.0	7.6	WW

Series drawing

All measurements are in mm.

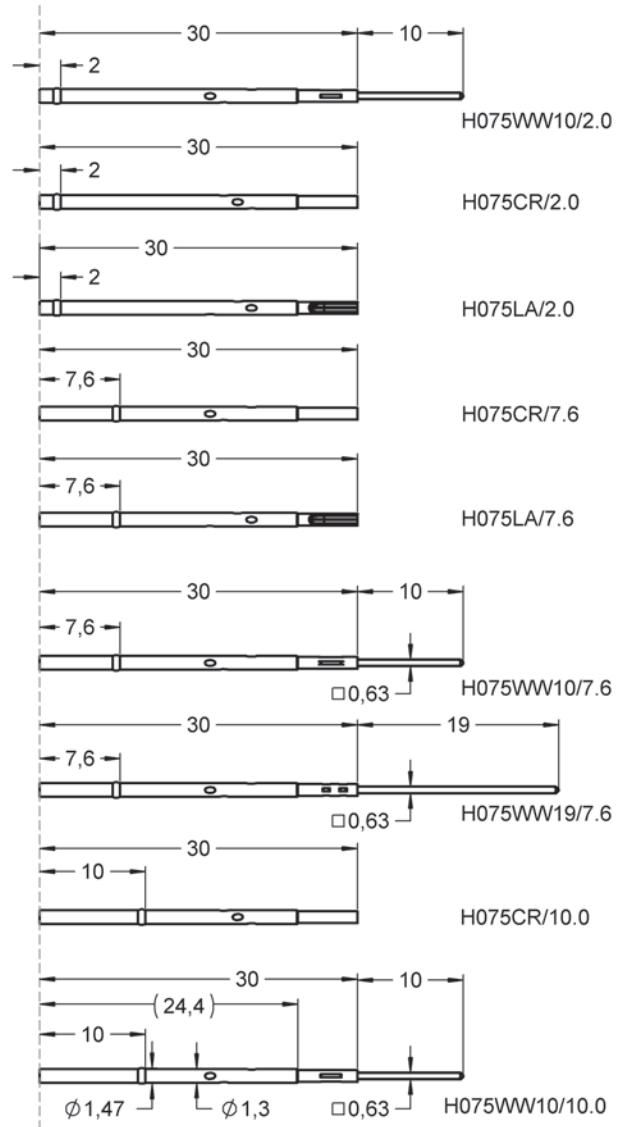

The insertion depth 24.4 mm and outer diameter are the same for all receptacles shown above. Different dimensions are listed.

BASIC PROBES 75 MIL



H075

Receptacles | 075 mil |
For Probe types F075, F703, F793

Materials and plating

Receptacle	Brass	gold plated
------------	-------	-------------

Accessories

1008325	FEWZ-075EV	Insertion tool receptacle
1014311	FEWZ-075E0	Insertion tool receptacle


Drill size recommendation (mm)

H075...	Press ring as stop	1.29 - 1.30
H075...	Press ring inserted	1.36 - 1.40

Order code	Product name	Press ring position [mm]	CXN
1011930	H075WW10-2.0S2	2.0	WW
1010828	H075WW10-2.0S1	2.0	WW
1057693	H075CR-10.0S1	10.0	CR
1012173	H075WL11-7.6	7.6	WL
1026400	H075WL-7.6	7.6	WL
1092190	H075WW10-2.0AT	2.0	WW
1092208	H075WW10-7.6AT	7.6	WW
1092209	H075WW10-10.0AT	7.6	WW
1143245	H075WW19-7.6AT	10.0	WW
1133640	H075WW19-10.0AT	7.6	WW

Series drawing

All measurements are in mm.

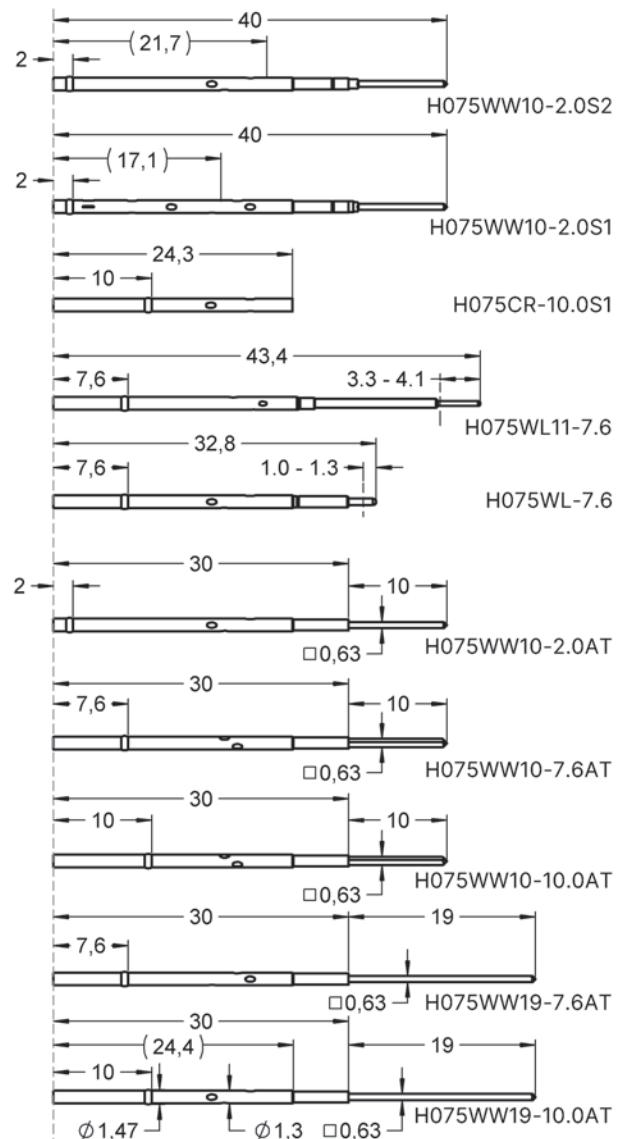

The insertion depth 24.4 mm and outer diameter are the same for all receptacles shown above. Different dimensions are listed.

BASIC PROBES 75 MIL



F793

Up to 4 A | 75 mil | FCT application

Electrical specifications

Current [A]	4
R Typ [mOhm]	<20

Mechanical specifications

Temperature [°C]	-45°...+100°
Preload [cN]	20
Spring force [cN] at nt ±20%	120
Nominal travel [mm]	8.0
Maximum travel [mm]	10.0

Materials and plating

Plunger	BeCu / Steel	gold plated
Barrel	Nickel silver	gold plated
Spring	Spring steel	silver plated
Receptacle	Nickel silver	gold plated


Accessories

1008325	FEWZ-075EV	Insertion tool receptacle
1003587	FDWZ-075	Insertion tool probe

* Overview of other receptacles H075 on page 52+53

Series drawing

All measurements are in mm.

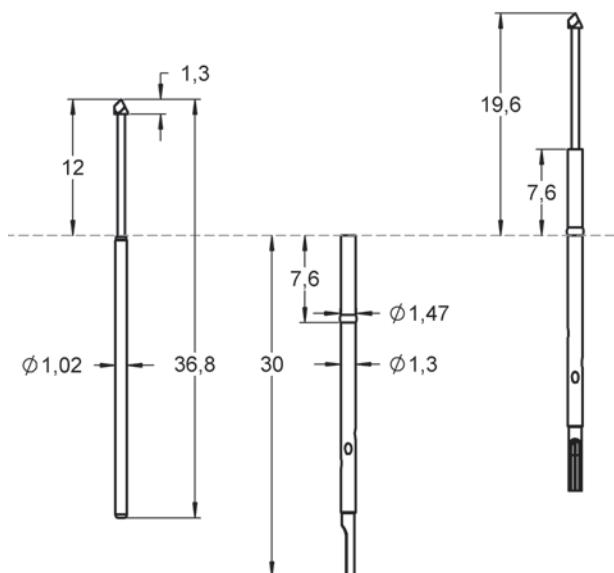

Drill size recommendation (mm)

H075...	Press ring as stop	1.29 - 1.30
H075...	Press ring inserted	1.36 - 1.40

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1006533	F79306B120G120	06	1.20	B / G	120	-	-	-
1007492	F79312B120G120	12	1.20	B / G	120	-	-	-
1006535	F79314B120G120	14	1.20	B / G	120	-	-	-
1006534	F79315B120G120	15	1.20	B / G	120	-	-	-
1006383	F79321B064G120	21	0.64	B / G	120	-	-	-
1006898	F79330S064L120	30	0.64	S / L	120	-	-	-
1006707	F79333S064L120	33	0.64	S / L	120	-	-	-
1006536	F79338S064L120	38	0.64	S / L	120	-	-	-

BASIC PROBES 75 MIL

FM Choice



F793L

Up to 4 A | 75 mil | FCT application

Electrical specifications

Current [A]	4
R Typ [mOhm]	<20

Mechanical specifications

Temperature [°C]	-45°...+100°
Preload [cN]	20
Spring force [cN] at nt ±20%	120
Nominal travel [mm]	8.0
Maximum travel [mm]	10.0

Materials and plating

Plunger	BeCu	gold plated
	Palladium alloy	unplated
Barrel	Nickel silver	gold plated
Spring	Spring steel	silver plated
Receptacle	Nickel silver	gold plated


Accessories

1010808	H075LA-7.6	Receptacle
1008325	FEWZ-075EV	Insertion tool receptacle
1003587	FDWZ-075	Insertion tool probe

* Overview of other receptacles H075 on page 52+53

Series drawing

All measurements are in mm.

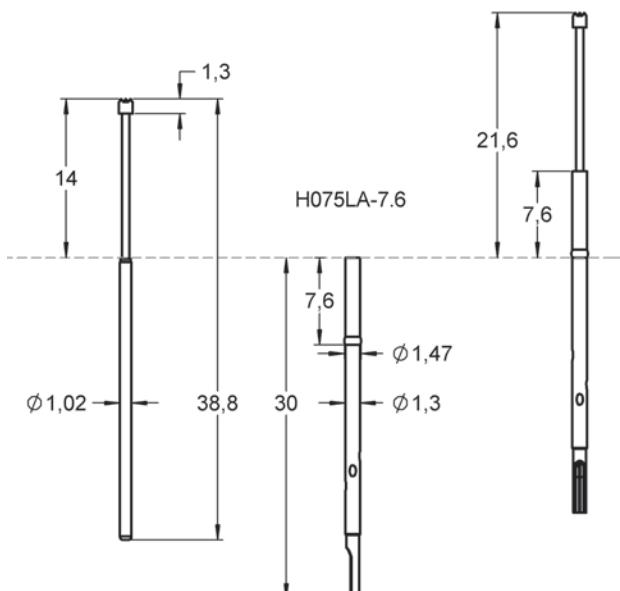

Drill size recommendation (mm)

H075...	Press ring as stop	1.29 - 1.30
H075...	Press ring inserted	1.36 - 1.40

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1007132	F79306B120G120L	06	1.20	B / G	120	-	L	-
1035690	F79310S055P120RPL	10	0.55	S / L	120	-	RPL	-
1017853	F79312B120G120L	12	1.20	B / G	120	-	L	-
1008743	F79314B120G120L	14	1.20	B / G	120	-	L	-
1007133	F79315B120G120L	15	1.20	B / G	120	-	L	-
1007134	F79333S064L120L	33	0.64	S / L	120	-	L	FM Choice

BASIC PROBES 75 MIL

FM Choice



F793HP / F793HPL

Up to 4 A | 75 mil | FCT application

Electrical specifications

Current [A]	4
R TYP [mOhm]	<20

Mechanical specifications

Temperature [°C]	-45°...+100°
Preload [cN]	70
Spring force [cN] at nt ±20%	250
Nominal travel [mm]	8.0
Maximum travel [mm]	10.0

Materials and plating

Plunger	Palladium alloy	unplated
Barrel	Nickel silver	gold plated
Spring	Spring steel	silver plated
Receptacle	Nickel silver	gold plated

Accessories

1010808	H075LA-7.6	Receptacle
1008325	FEWZ-075EV	Insertion tool receptacle
1003587	FDWZ-075	Insertion tool probe

* Overview of other receptacles H075 on page 52+53


Drill size recommendation (mm)

H075...	Press ring as stop	1.29 - 1.30
H075...	Press ring inserted	1.36 - 1.40

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1013301	F7933S064P250HP	33	0.64	S / P	250	-	HP	FM Choice
1020550	F7933S064L250HPL	33	0.64	S / L	250	-	HPL	FM Choice
1042075	F7933S120P250HP	35	1.20	S / P	250	-	HP	FM Choice

Series drawing

All measurements are in mm.

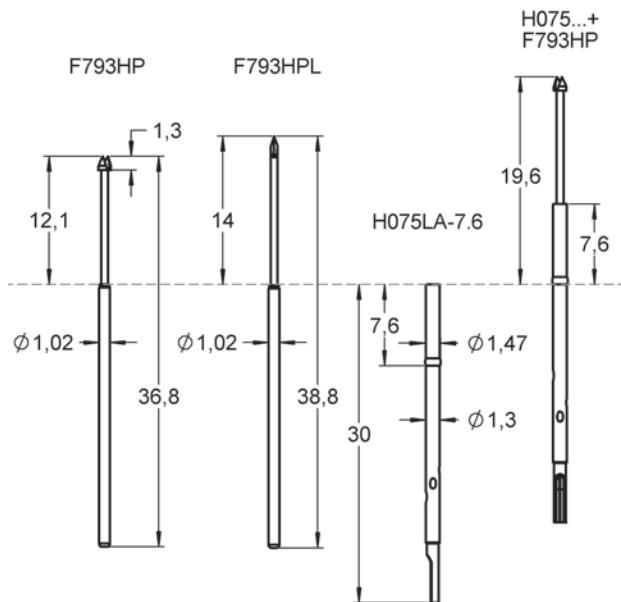

BASIC PROBES 75 MIL

FM Choice



F075

Up to 4 A | 75 mil | ICT application

Electrical specifications

Current [A]	4
R Typ [mOhm]	<20

Mechanical specifications

Temperature [°C]	-45°...+100°		
Preload [cN]	50	70	100
Spring force [cN] at nt ±20%	100	150	280
Nominal travel [mm]	4.3	4.3	4.3
Maximum travel [mm]	6.4	6.4	6.4

Materials and plating

Plunger	BeCu	gold plated
Barrel	Nickel silver	gold plated
Spring	Spring steel	silver plated
Receptacle	Nickel silver	gold plated

Accessories

1010808	H075LA-7.6	Receptacle
1008325	FEWZ-075EV	Insertion tool receptacle
1003587	FDWZ-075	Insertion tool probe

* Overview of other receptacles H075 on page 52+53


Drill size recommendation (mm)

H075...	Press ring as stop	1.29 - 1.30
H075...	Press ring inserted	1.36 - 1.40

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1017309	F07505B120G150	05	1.20	B / G	150	-	-	FM Choice
1017478	F07505B120G200	05	1.20	B / G	200	-	-	FM Choice
1010962	F07505B120G280	05	1.20	B / G	280	-	-	FM Choice
1018425	F07506B100G200	06	1.00	B / G	200	-	-	

Series drawing

All measurements are in mm.

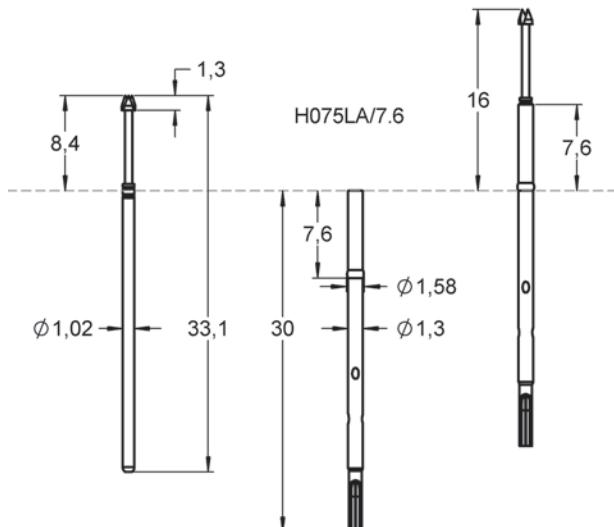

BASIC PROBES 75 MIL

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1014318	F07506B120G100	06	1.20	B / G	100	-	-	FM Choice
1017310	F07506B120G150	06	1.20	B / G	150	-	-	FM Choice
1017504	F07506B120G200	06	1.20	B / G	200	-	-	FM Choice
1001394	F07506B120G280	06	1.20	B / G	280	-	-	FM Choice
1017337	F07506B130G150IK04	06	1.30	B / G	150	-	IK04	FM Choice
1017486	F07506B130G200IK04	06	1.30	B / G	200	-	IK04	FM Choice
1017351	F07506B130G280IK04	06	1.30	B / G	280	-	IK04	FM Choice
1018424	F07507S120L200	07	1.20	S / L	200	-	-	FM Choice
1112258	F07507S120L200H	07	1.20	S / L	200	-	H	FM Choice
1017451	F07510S050L100RP	10	0.50	S / L	100	-	RP	-
1017311	F07510S050L150RP	10	0.50	S / L	150	-	RP	-
1017250	F07510S064L100	10	0.64	S / L	100	-	-	-
1017312	F07510S064L150	10	0.64	S / L	150	-	-	-
1007813	F07510S064L280	10	0.64	S / L	280	-	-	-
1017251	F07511B064G100	11	0.64	B / G	100	-	-	FM Choice
1017313	F07511B064G150	11	0.64	B / G	150	-	-	-
1017515	F07511B064G200	11	0.64	B / G	200	-	-	-
1007430	F07511B064G280	11	0.64	B / G	280	-	-	FM Choice
1004062	F07514S078L280	14	0.78	S / L	280	-	-	-
1109249	F07514S120L100	14	1.20	S / L	100	-	-	FM Choice
1017288	F07514S120L150	14	1.20	S / L	150	-	-	FM Choice
1017552	F07514S120L200	14	1.20	S / L	200	-	-	FM Choice
1007434	F07514S120L280	14	1.20	S / L	280	-	-	FM Choice
1000750	F07515B090G200	15	0.90	B / G	200	-	-	FM Choice
1017265	F07515B120G100	15	1.20	B / G	100	-	-	FM Choice
1017299	F07515B120G150	15	1.20	B / G	150	-	-	FM Choice
1017516	F07515B120G200	15	1.20	B / G	200	-	-	FM Choice
1001395	F07515B120G280	15	1.20	B / G	280	-	-	FM Choice
1017314	F07517B120G100	17	1.20	B / G	100	-	-	-
1017300	F07517B120G150	17	1.20	B / G	150	-	-	-
1017506	F07517B120G200	17	1.20	B / G	200	-	-	-
1014557	F07518B064G180H	18	0.64	B / G	180	-	H	-

BASIC PROBES 75 MIL

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1001396	F07518B078G280	18 	0.78	B / G	280	-	-	-
1017297	F07521S064L100	21 	0.64	S / L	100	-	-	FM Choice
1017319	F07521S064L150	21 	0.64	S / L	150	-	-	FM Choice
1017502	F07521S064L200	21 	0.64	S / L	200	-	-	FM Choice
1005299	F07521S064L280	21 	0.64	S / L	280	-	-	FM Choice
1017320	F07530S064L150	30 	0.64	S / L	150	-	-	-
1139344	F07530S064L200	30 	0.64	S / L	200	-	-	-
1007803	F07530S064L280	30 	0.64	S / L	280	-	-	-
1017266	F07533S064L100	33 	0.64	S / L	100	-	-	FM Choice
1017283	F07533S064L150	33 	0.64	S / L	150	-	-	FM Choice
1017518	F07533S064L200	33 	0.64	S / L	200	-	-	FM Choice
1006812	F07533S064L280	33 	0.64	S / L	280	-	-	FM Choice
1001397	F07533S078L280	33 	0.78	S / L	280	-	-	-
1092210	F07535S050L280	35 	0.50	S / L	280	-	-	FM Choice
1017551	F07536B120G200	36 	1.20	B / G	200	-	-	FM Choice
1001398	F07536B120G280	36 	1.20	B / G	280	-	-	FM Choice
1006727	F07537B050G150	37 	0.50	B / G	150	-	-	-
1017505	F07537B050G200	37 	0.50	B / G	200	-	-	-
1004759	F07537B050G280	37 	0.50	B / G	280	-	-	-
1017415	F07538S064L150	38 	0.64	S / L	150	-	-	-
1017477	F07538S064L200	38 	0.64	S / L	200	-	-	-
1007799	F07538S064L280	38 	0.64	S / L	280	-	-	-
1017352	F07541B130G280IK04	41 	1.30	B / G	280	-	-	-
1017280	F07543S064L100	43 	0.64	S / L	100	-	-	FM Choice
1017416	F07543S064L150	43 	0.64	S / L	150	-	-	FM Choice
1017519	F07543S064L200	43 	0.64	S / L	200	-	-	FM Choice
1007594	F07543S064L280	43 	0.64	S / L	280	-	-	FM Choice
1035081	F07553S064L280	53 	0.64	S / L	280	-	-	FM Choice
1007607	F07563S120L130	63 	1.20	S / L	130	-	-	FM Choice
1017417	F07563S120L150	63 	1.20	S / L	150	-	-	FM Choice
1017490	F07563S120L200	63 	1.20	S / L	200	-	-	FM Choice
1008310	F07563S120L280	63 	1.20	S / L	280	-	-	FM Choice

BASIC PROBES 75 MIL

FM Choice



F075L

Up to 4 A | 75 mil | ICT application

Electrical specifications

Current [A]	4
R Typ [mOhm]	<20

Mechanical specifications

Temperature [°C]	-45°...+100°		
Preload [cN]	70	70	100
Spring force [cN] at nt ±20%	150	200	280
Nominal travel [mm]	4.3	4.3	4.3
Maximum travel [mm]	6.4	6.4	6.4

Materials and plating

Plunger	BeCu	gold plated
	Steel	longtime gold plated
Barrel	Nickel silver	gold plated
Spring	Spring steel	silver plated
Receptacle	Nickel silver	gold plated

Accessories

1010808	H075LA-7.6	Receptacle
1008325	FEWZ-075EV	Insertion tool receptacle
1003587	FDWZ-075	Insertion tool probe


* Overview of other receptacles H075 on page 52+53

Drill size recommendation (mm)

H075...	Press ring as stop	1.29 - 1.30
H075...	Press ring inserted	1.36 - 1.40

Series drawing

All measurements are in mm.

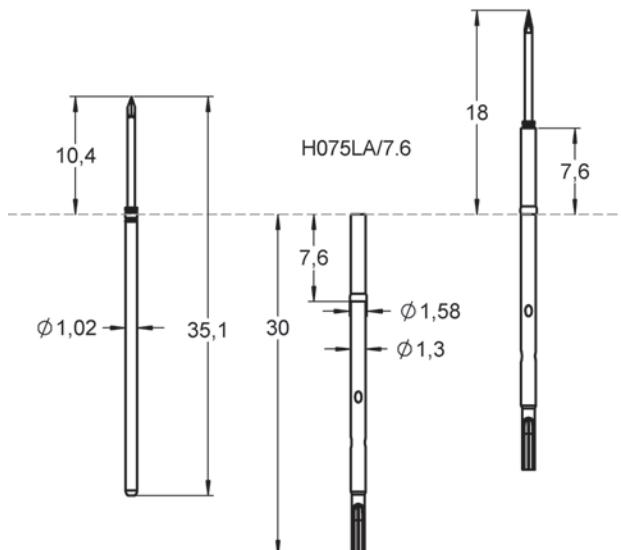

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1018365	F07506B120G280L	06	0.78	B / G	280	-	-	FM Choice
1017285	F07511B064G150L	11	0.64	S / L	100	-	-	FM Choice
1017489	F07511B064G200L	11	1.20	S / L	280	-	-	FM Choice

BASIC PROBES 75 MIL

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1018423	F07515B120G200L	15 	1.20	B / G	200	-	L	FM Choice
1007593	F07521S064L280L	21 	0.64	S / L	280	-	L	FM Choice
1004663	F07533S064L150L	33 	0.64	S / L	150	-	L	FM Choice
1017485	F07533S064L200L	33 	0.64	S / L	200	-	L	FM Choice
1006540	F07533S064L280L	33 	0.64	S / L	280	-	L	FM Choice
1005035	F07538S064L150L	38 	0.64	S / L	150	-	L	-
1026475	F07553S064L280L	53 	0.64	S / L	280	-	L	FM Choice

BASIC PROBES 75 MIL

FM Choice



F075HP

Up to 4 A | 75 mil | ICT application

Electrical specifications

Current [A]	4
R TYP [mOhm]	<40

Mechanical specifications

Temperature [°C]	-45°...+100°		
Preload [cN]	70	120	130
Spring force [cN] at nt ±20%	130	200	250
Nominal travel [mm]	4.3	4.3	4.3
Maximum travel [mm]	6.4	6.4	6.4

Materials and plating

Plunger	Palladium alloy	unplated
Barrel	Nickel silver	gold plated
Spring	Spring steel	silver plated
Receptacle	Nickel silver	gold plated

Accessories

1010808	H075LA-7.6	Receptacle
1008325	FEWZ-075EV	Insertion tool receptacle
1003587	FDWZ-075	Insertion tool probe


* Overview of other receptacles H075 on page 52+53

Drill size recommendation (mm)

H075...	Press ring as stop	1.29 - 1.30
H075...	Press ring inserted	1.36 - 1.40

Series drawing

All measurements are in mm.

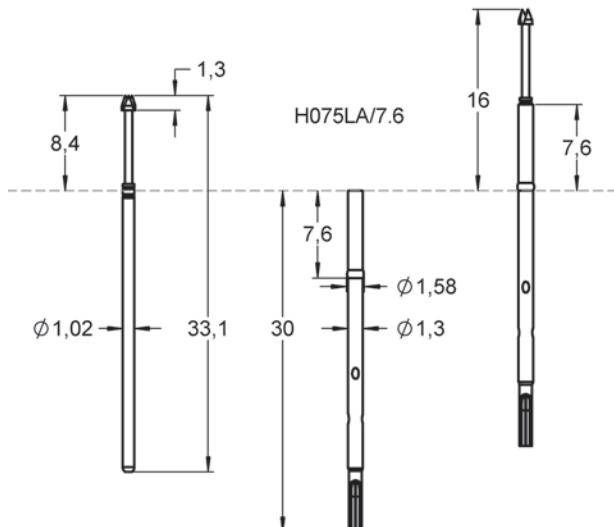

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1030563	F07514S120P250HP	14	1.20	S / P	250	-	HP	FM Choice
1010210	F07521S064P200HP	21	0.64	S / P	200	-	HP	FM Choice
1010169	F07521S064P250HP	21	0.64	S / P	250	-	HP	FM Choice

BASIC PROBES 75 MIL

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1014301	F07532S064P250HP	32 	1.20	S / P	250	-	HP	-
1016294	F07533S064P130HP	33 	0.64	S / P	130	-	HP	FM Choice
1010209	F07533S064P200HP	33 	0.64	S / P	200	-	HP	FM Choice
1010077	F07533S064P250HP	33 	0.64	S / P	250	-	HP	FM Choice
1033612	F07535S120P250HP	35 	1.20	S / P	250	-	HP	-
1038209	F07535S120P200HP	35 	1.20	S / P	200	-	HP	-
1135611	F07537B050P200HP	37 	0.50	S / P	200	-	HP	-
1010388	F07543S064P130HP	43 	0.64	S / P	130	-	HP	FM Choice
1010211	F07543S064P200HP	43 	0.64	S / P	200	-	HP	-
1010170	F07543S064P250HP	43 	0.64	S / P	250	-	HP	FM Choice
1145256	F07543S064P300HP	43 	0.64	S / P	300	-	HP	FM Choice
1010212	F07562S064P200HP	62 	0.64	S / P	200	-	HP	FM Choice
1010171	F07562S064P250HP	62 	0.64	S / P	250	-	HP	FM Choice

BASIC PROBES 75 MIL

FM Choice

F075HPL

Up to 4 A | 75 mil | ICT application



Electrical specifications

Current [A]	4
R TYP [mOhm]	<40

Mechanical specifications

Temperature [°C]	-45°...+100°	
Preload [cN]	120	130
Spring force [cN] at nt ±20%	200	250
Nominal travel [mm]	4.3	4.3
Maximum travel [mm]	6.4	6.4

Materials and plating

Plunger	Palladium alloy	unplated
Barrel	Nickel silver	gold plated
Spring	Spring steel	silver plated
Receptacle	Nickel silver	gold plated

Accessories

1010808	H075LA-7.6	Receptacle
1008325	FEWZ-075EV	Insertion tool receptacle
1003587	FDWZ-075	Insertion tool probe

* Overview of other receptacles H075 on page 52+53


Drill size recommendation (mm)

H075...	Press ring as stop	1.29 - 1.30
H075...	Press ring inserted	1.36 - 1.40

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1053951	F07521S064P200HPL	21	0.64	S / P	200	-	HPL	FM Choice
1010292	F07521S064P250HPL	21	0.64	S / P	250	-	HPL	FM Choice
1014299	F07532S064P250HPL	32	0.64	S / P	250	-	HPL	-

Series drawing

All measurements are in mm.

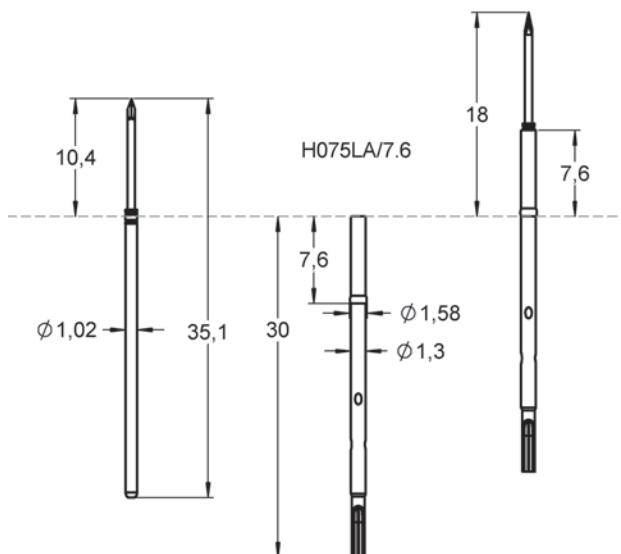

BASIC PROBES 75 MIL

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1001149	F07533S064L200HPL	33 	0.64	S / P	200	-	HPL	FM Choice
1010288	F07533S064P200HPL	33 	0.64	S / P	200	-	HPL	FM Choice
1010291	F07533S064P250HPL	33 	0.64	S / P	250	-	HPL	FM Choice
1010289	F07543S064P200HPL	43 	0.64	S / P	200	-	HPL	FM Choice
1010290	F07562S064P200HPL	62 	0.64	S / P	200	-	HPL	FM Choice

BASIC PROBES 75 MIL



F703

Up to 4 A | 75 mil | ICT application

Electrical specifications

Current [A]	4
R TYP [mOhm]	<20

Mechanical specifications

Temperature [°C]	-45°...+100°
Preload [cN]	70
Spring force [cN] at nt ±20%	150
Nominal travel [mm]	4.3
Maximum travel [mm]	6.4

Materials and plating

Plunger	BeCu	gold plated
	Steel	longtime gold plated
Barrel	Nickel silver	gold plated
Spring	Spring steel	silver plated
Receptacle	Nickel silver	gold plated


Accessories

1010808	H075LA-7.6	Receptacle
1008325	FEWZ-075EV	Insertion tool receptacle
1003587	FDWZ-075	Insertion tool probe

* Overview of other receptacles H075 on page 52+53

Series drawing

All measurements are in mm.

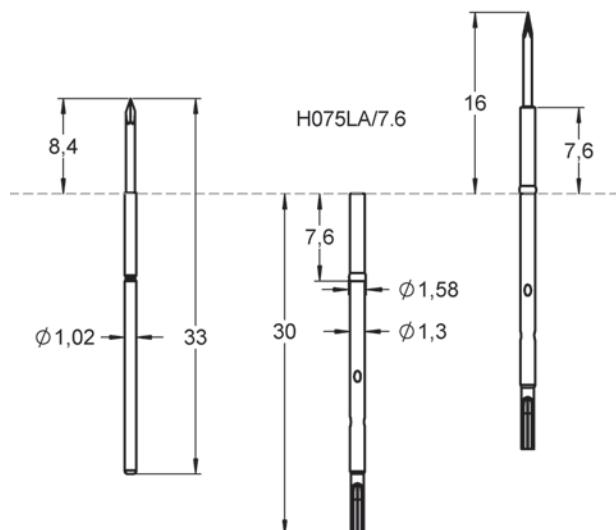

Drill size recommendation (mm)

H075...	Press ring as stop	1.29 - 1.30
H075...	Press ring inserted	1.36 - 1.40

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1017943	F70311B078G150	11	0.78	B / G	150	-	-	-
1017949	F70318B078G150	18	0.78	B / G	150	-	-	-
1017942	F70321S078L150	21	0.78	S / L	150	-	-	-
1017953	F70333S078L150	33	0.78	S / L	150	-	-	-

BASIC PROBES 75 MIL



F701

Up to 4 A | 75 mil | Limited space

Electrical specifications

Current [A]	4
R Typ [mOhm]	<20

Mechanical specifications

Temperature [°C]	-45°...+100°
Preload [cN]	40 30
Spring force [cN] at nt ±20%	70 150
Nominal travel [mm]	4.0 4.0
Maximum travel [mm]	5.0 5.0

Materials and plating

Plunger	BeCu Steel	gold plated longtime gold plated
Barrel	Bronze	gold plated
Spring	Spring steel	silver plated
Receptacle	Bronze	gold plated

Accessories


1001838	H701LA	Receptacle
1001830	H701CR	Receptacle
1001839	H701WW	Receptacle
1014311	FEWZ-075E0	Insertion tool receptacle
1003587	FDWZ-075	Insertion tool probe

Drill size recommendation (mm)

Receptacle	H701...	1.31 - 1.32
------------	---------	-------------

Series drawing

All measurements are in mm.

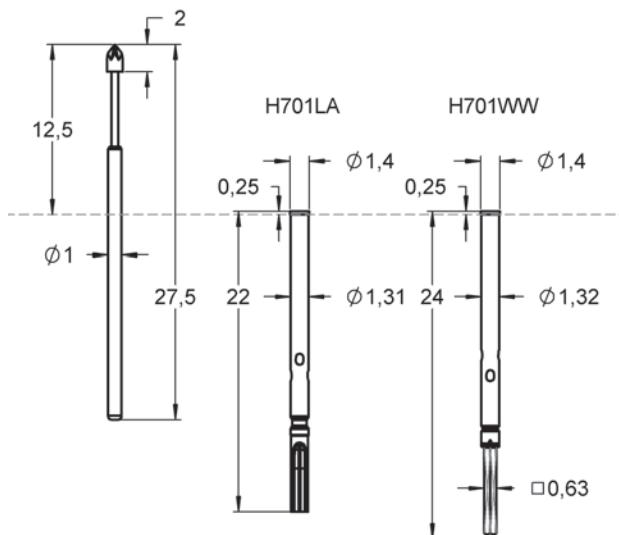

BASIC PROBES 75 MIL

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1004844	F70105B150G150	05 	1.50	B / G	150	-	-	-
1003296	F70106B115G150	06 	1.15	B / G	150	-	-	-
1001491	F70107S115L150	07 	1.15	S / L	150	-	-	-
1024502	F70111B050G070	11 	0.50	B / G	70	-	-	-
1001493	F70114S115L150	14 	1.15	S / L	150	-	-	-
1001494	F70115B130G150	15 	1.30	B / G	150	-	-	-
1001495	F70118B050G150	18 	0.50	B / G	150	-	-	-
1001496	F70121S050L150	21 	0.50	S / L	150	-	-	-

BASIC PROBES 75 MIL



F561

Up to 4 A | 75 mil | Limited space

Electrical specifications

Current [A]	4
R Typ [mOhm]	<40

Mechanical specifications

Temperature [°C]	-45°...+100°		
Preload [cN]	30	50	70
Spring force [cN] at nt ±20%	80	100	150
Nominal travel [mm]	2.4	2.4	2.4
Maximum travel [mm]	3.0	3.0	3.0

Materials and plating

Plunger	BeCu	gold plated
Barrel	Bronze	gold plated
Spring	Spring steel	silver plated
Receptacle	Nickel silver	gold plated

Accessories

1019594	H561WW10-4.0	Receptacle
1019527	H561CR-4.0	Receptacle
1019590	H561WR-4.0	Receptacle
1014311	FEWZ-075E0	Insertion tool receptacle
1003587	FDWZ-075	Insertion tool probe


Drill size recommendation (mm)

H561...	Press ring as stop	1.29 - 1.30
H561...	Press ring inserted	1.36 - 1.40

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1019560	F56105B150G080	05	1.50	B / G	80	-	-	-
1019561	F56105B150G100	05	1.50	B / G	100	-	-	-
1019562	F56105B150G150	05	1.50	B / G	150	-	-	-

Series drawing

All measurements are in mm.

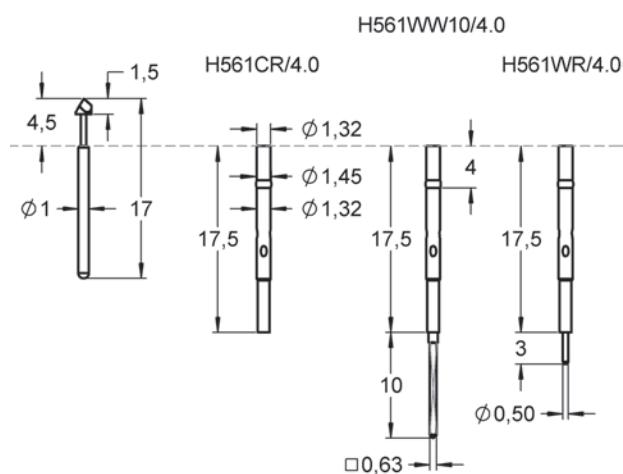

BASIC PROBES 75 MIL

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1019563	F56106B150G080	06 	1.50	B / G	80	-	-	-
1019564	F56106B150G100	06 	1.50	B / G	100	-	-	-
1019565	F56106B150G150	06 	1.50	B / G	150	-	-	-
1019566	F56111B050G080	11 	0.50	B / G	80	-	-	-
1019567	F56111B050G100	11 	0.50	B / G	100	-	-	-
1019568	F56111B050G150	11 	0.50	B / G	150	-	-	-
1019526	F56115B150G080	15 	1.50	B / G	80	-	-	-
1019535	F56115B150G100	15 	1.50	B / G	100	-	-	-
1019536	F56115B150G150	15 	1.50	B / G	150	-	-	-
1019569	F56118B050G080	18 	0.50	B / G	80	-	-	-
1019571	F56118B050G150	18 	0.50	B / G	150	-	-	-

BASIC PROBES 50 MIL



H050

Receptacles | 050 mil |
For Probe types F050

Materials and plating

Receptacle	Brass	gold plated
------------	-------	-------------

Accessories

1008393	FEWZ-050EV	Insertion tool receptacle
1014313	FEWZ-050EO	Insertion tool receptacle


Drill size recommendation (mm)

H050...	Press ring as stop	0.95 - 0.97
H050...	Press ring inserted	0.98 - 1.01

Order code	Product name	Press ring position [mm]	CXN
1010849	H050LA-7.9	7.6	LA
1010847	H050CR-7.9	7.6	CR
1010850	H050DR-7.9	7.6	DR
1012157	H050WL11-7.9	7.6	WL
1012107	H050VS	2.5	-

Series drawing

All measurements are in mm.

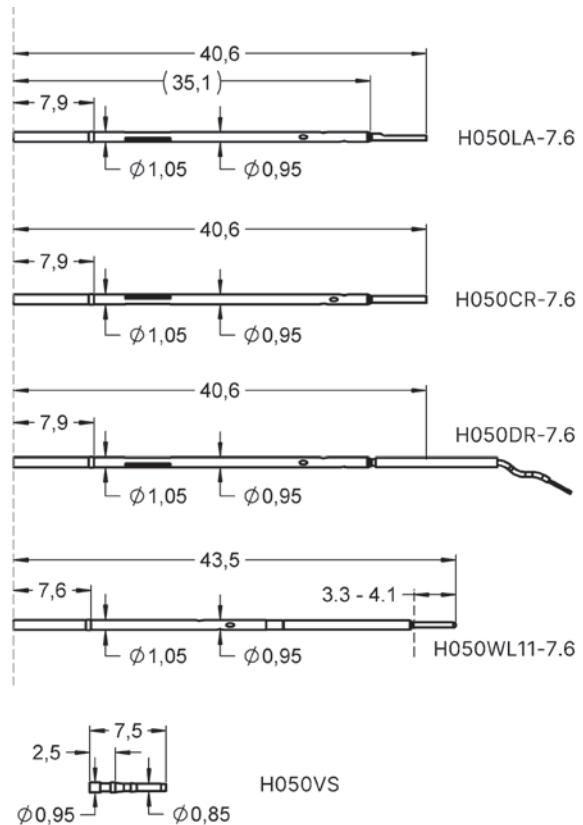

The insertion depth 35.1 mm and outer diameter are the same for all receptacles shown above. Different dimensions are listed.

BASIC PROBES 50 MIL

FM Choice



F050

Up to 3 A | 50 mil | ICT application

Electrical specifications

Current [A]	3
R Typ [mOhm]	<10

Mechanical specifications

Temperature [°C]	-45°...+100°
Preload [cN]	60 90
Spring force [cN] at nt ±20%	150 200
Nominal travel [mm]	4.3 4.3
Maximum travel [mm]	6.4 6.4

Materials and plating

Plunger	BeCu	gold plated
	Steel	longtime gold plated
Barrel	Bronze	gold plated
Spring	BeCu	gold plated
Receptacle	Bronze	gold plated

Accessories

1010849	H050LA-7.9	Receptacle
1008393	FEWZ-050EV	Insertion tool receptacle
1003576	FDWZ-050	Insertion tool probe

* Overview of other receptacles H050 on page 71


Drill size recommendation (mm)

H050...	Press ring as stop	0.95 - 0.97
H050...	Press ring inserted	0.98 - 1.01

Series drawing

All measurements are in mm.

F050

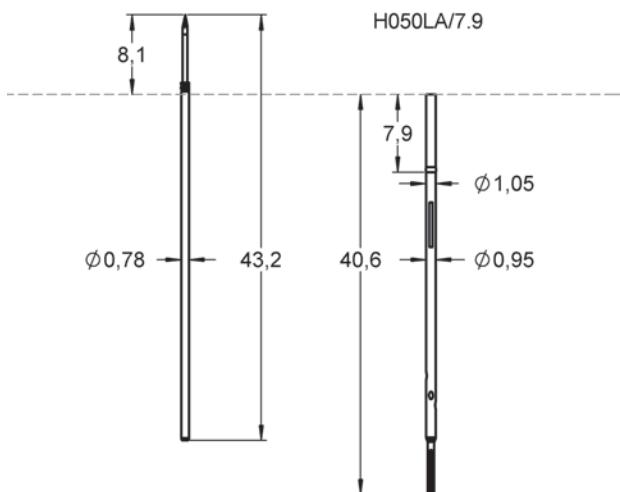

BASIC PROBES 50 MIL

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1037835	F05005B090G150	05 	0.90	B / G	150	-	-	FM Choice
1017079	F05005B090G200	05 	0.90	B / G	200	-	-	FM Choice
1010443	F05006B090G150	06 	0.90	B / G	150	-	-	FM Choice
1017078	F05006B090G200	06 	0.90	B / G	200	-	-	FM Choice
1010444	F05011B050G150	11 	0.50	B / G	150	-	-	-
1017077	F05015B090G200	15 	0.90	B / G	200	-	-	FM Choice
1097465	F05018S050L100	18 	0.50	B / G	100	-	-	-
1010445	F05021S050L150	21 	0.50	B / G	100	-	-	FM Choice
1000630	F05021S050L200	21 	0.50	B / G	100	-	-	FM Choice
1010392	F05033S050L150	33 	0.50	B / G	100	-	-	FM Choice
1011940	F05033S050L200	33 	0.50	B / G	100	-	-	FM Choice
1010393	F05038S050L150	38 	0.50	B / G	100	-	-	-
1000339	F05038S050L200	38 	0.50	B / G	100	-	-	-
1010865	F05043S050L150	43 	0.50	B / G	100	-	-	FM Choice
1017093	F05043S050L200	43 	0.50	B / G	150	-	-	FM Choice

BASIC PROBES 50 MIL

FM Choice



F050L

Up to 3 A | 50 mil | ICT application

Electrical specifications

Current [A]	3
R Typ [mOhm]	<10

Mechanical specifications

Temperature [°C]	-45°...+100°
Preload [cN]	60
Spring force [cN] at nt ±20%	150
Nominal travel [mm]	4.3
Maximum travel [mm]	6.4

Materials and plating

Plunger	BeCu	gold plated
	Steel	longtime gold plated
Barrel	Bronze	gold plated
Spring	BeCu	gold plated
Receptacle	Bronze	gold plated

Accessories

1010849	H050LA-7.9	Receptacle
1008393	FEWZ-050EV	Insertion tool receptacle
1003576	FDWZ-050	Insertion tool probe

* Overview of other receptacles H050 on page 71

Drill size recommendation (mm)


H050...	Press ring as stop	0.95 - 0.97
H050...	Press ring inserted	0.98 - 1.01

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1000115	F05011B050G150L	11	0.50	S / L	150	-	L	-
1010394	F05033S050L150L	33	0.50	S / L	150	-	L	FM Choice

Series drawing

All measurements are in mm.

F050L

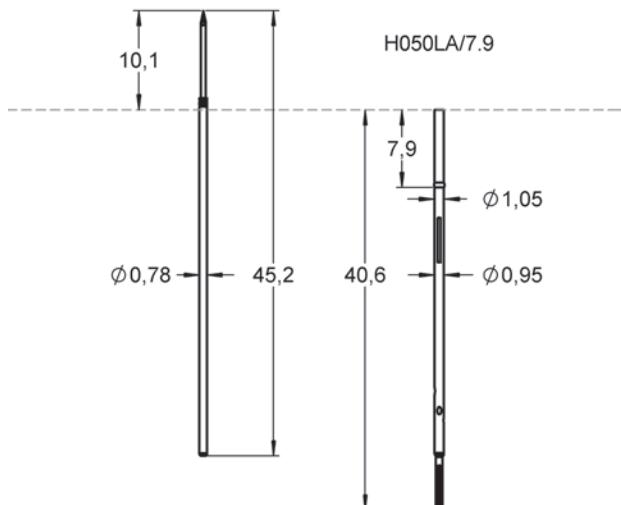

BASIC PROBES 50 MIL

FM Choice



F050HP

Up to 3 A | 50 mil | ICT application

Electrical specifications

Current [A]	3
R Typ [mOhm]	<40

Mechanical specifications

Temperature [°C]	-45°...+100°
Preload [cN]	80 125
Spring force [cN] at nt ±20%	130 200
Nominal travel [mm]	4.3 4.3
Maximum travel [mm]	6.4 6.4

Materials and plating

Plunger	BeCu	palladium plated
	Steel	palladium plated
Barrel	Bronze	gold plated
Spring	BeCu	gold plated
Receptacle	Bronze	gold plated

Accessories


1010849	H050LA-7.9	Receptacle
1008393	FEWZ-050EV	Insertion tool receptacle
1003576	FDWZ-050	Insertion tool probe

* Overview of other receptacles H050 on page 71

Series drawing

All measurements are in mm.

F050

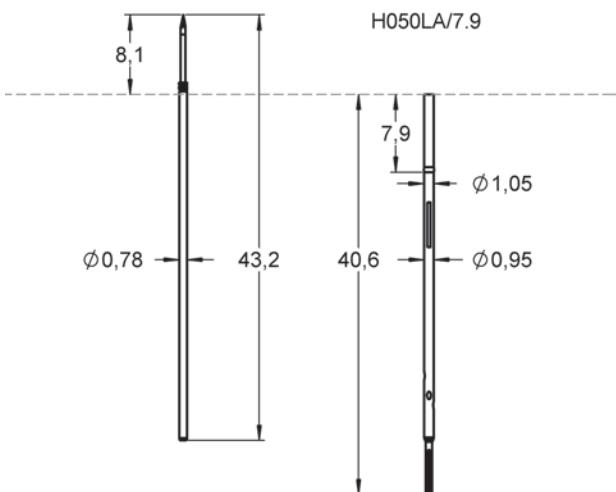

Drill size recommendation (mm)

H050...	Press ring as stop	0.95 - 0.97
H050...	Press ring inserted	0.98 - 1.01

Order code

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1137414	F05006B090P200HP	06	0.90	B / G	150	-	-	FM Choice
1010225	F05021S050P200HP	21	0.90	B / G	200	-	-	FM Choice
1010224	F05033S050P200HP	33	0.90	B / G	150	-	-	FM Choice
1010345	F05043S050P130HP	43	0.50	B / G	100	-	-	FM Choice
1010226	F05043S050P200HP	43	0.50	B / G	100	-	-	FM Choice
1010227	F05062S050P200HP	43	0.50	B / G	150	-	-	FM Choice

BASIC PROBES 50 MIL

FM Choice



F050HPL

Up to 3 A | 50 mil | ICT application

Electrical specifications

Current [A]	3
R TYP [mOhm]	<10

Mechanical specifications

Temperature [°C]	-45°...+100°
Preload [cN]	120
Spring force [cN] at nt ±20%	200
Nominal travel [mm]	4.3
Maximum travel [mm]	6.4

Materials and plating

Plunger	Steel	palladium plated
Barrel	Bronze	gold plated
Spring	BeCu	gold plated
Receptacle	Bronze	gold plated

Accessories

1010849	H050LA-7.9	Receptacle
1008393	FEWZ-050EV	Insertion tool receptacle
1003576	FDWZ-050	Insertion tool probe

* Overview of other receptacles H050 on page 71

Drill size recommendation (mm)


H050...	Press ring as stop	0.95 - 0.97
H050...	Press ring inserted	0.98 - 1.01

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1019119	F05033S050P200HPL	33	0.50	S / P	200	-	HPL	FM Choice
1026814	F05043S050P200HPL	43	0.50	S / P	200	-	HPL	FM Choice

Series drawing

All measurements are in mm.

F050L

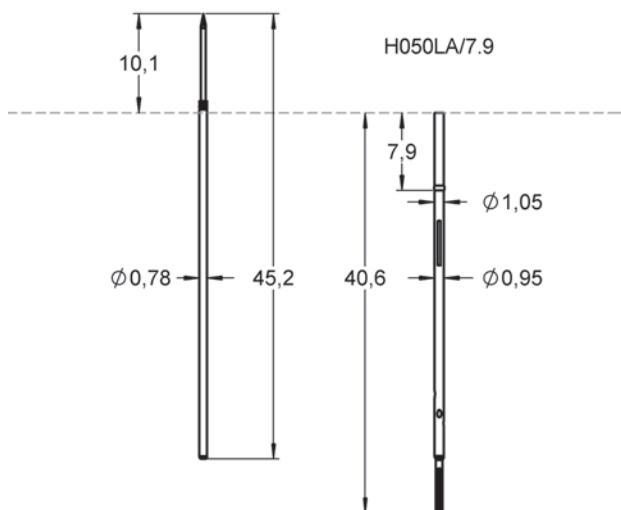

BASIC PROBES 50 MIL



F051

Up to 3 A | 50 mil | FCT application

Electrical specifications

Current [A]	3
R TYP [mOhm]	<40

Mechanical specifications

Temperature [°C]	-45°...+100°
Preload [cN]	35
Spring force [cN] at nt ±20%	150
Nominal travel [mm]	8.0
Maximum travel [mm]	10.0

Materials and plating

	BeCu	gold plated
Plunger	Steel	longtime gold plated
	Steel	palladium plated
Barrel	Bronze	gold plated
Spring	BeCu	gold plated
Receptacle	Bronze	gold plated


Accessories

1010849	H050LA-7.9	Receptacle
1008393	FEWZ-050EV	Insertion tool receptacle
1003576	FDWZ-050	Insertion tool probe

* Overview of other receptacles H050 on page 71

Series drawing

All measurements are in mm.

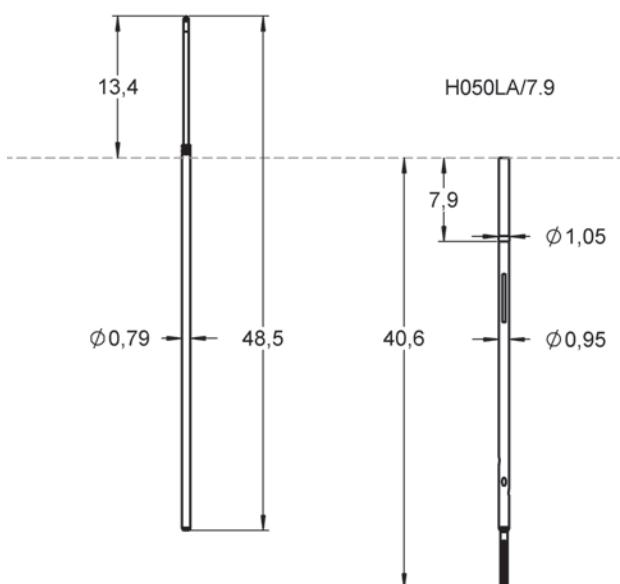

Drill size recommendation (mm)

H050...	Press ring as stop	0.95 - 0.97
H050...	Press ring inserted	0.98 - 1.01

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1000113	F05111B050G150	11	0.50	B / G	150	-	-	-
1000493	F05121S050L150	21	0.50	S / L	150	-	-	-
1011293	F05143S050L150	43	0.50	S / L	150	-	-	-
1011291	F05143S050P150	43	0.50	S / P	150	-	-	-

BASIC PROBES 50 MIL



F788

Up to 3 A | 50 mil | FCT application

Electrical specifications

Current [A]	3
R Typ [mOhm]	<20

Mechanical specifications

Temperature [°C]	-45°...+100°	
Preload [cN]	30	30
Spring force [cN] at nt ±20%	165	180
Nominal travel [mm]	6.4	6.4
Maximum travel [mm]	7.0	7.0

Materials and plating

Plunger	BeCu	gold plated
	Steel	longtime gold plated
Barrel	Bronze	gold plated
Spring	Spring steel	silver plated
Receptacle	Nickel silver	gold plated

Accessories

1001860	H787LA	Receptacle
1008393	FEWZ-050EV	Insertion tool receptacle
1003576	FDWZ-050	Insertion tool probe


* Overview of other receptacles H787 on page 83

Drill size recommendation (mm)

H787...	Press ring as stop	0.99 - 1.00
H787...	Press ring inserted	1.05 - 1.07

Series drawing

All measurements are in mm.

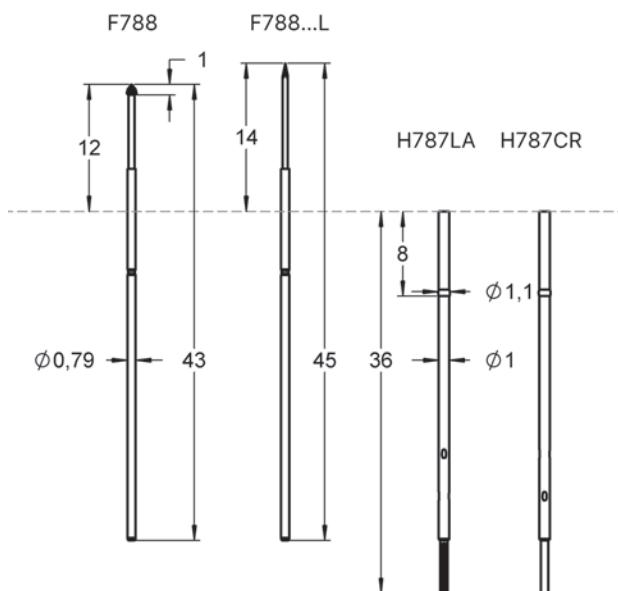

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1003732	F78805B090G165	05	0.90	B / G	165	-	-	-
1001558	F78806B090G165	06	0.90	B / G	165	-	-	-
1001547	F78807S090L165	07	0.90	S / L	165	-	-	-

BASIC PROBES 50 MIL

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1001550	F78821S060L165	21 	0.60	S / L	165	-	-	-
1018641	F78833S050L165	33 	0.50	S / L	165	-	-	-
1006037	F78833S050L165L	33 	0.60	S / L	165	-	L	-
1001551	F78833S060L165	33 	0.60	S / L	165	-	-	-
1007490	F78843S050L180	43 	0.50	S / L	180			

BASIC PROBES 50 MIL



F768

Up to 3 A | 50 mil | Limited space

Electrical specifications

Current [A]	3
R TYP [mOhm]	<20

Mechanical specifications

Temperature [°C]	-45°...+100°
Preload [cN]	50
Spring force [cN] at nt ±20%	130
Nominal travel [mm]	3.2
Maximum travel [mm]	4.0

Materials and plating

Plunger	BeCu	gold plated
	Steel	longtime gold plated
Barrel	Bronze	gold plated
Spring	Spring steel	silver plated
Receptacle	Nickel silver	gold plated

Accessories

1001860	H787LA	Receptacle
1008393	FEWZ-050EV	Insertion tool receptacle
1003576	FDWZ-050	Insertion tool probe


* Overview of other receptacles H787 on page 83

Drill size recommendation (mm)

H787...	Press ring as stop	0.99 - 1.00
H787...	Press ring inserted	1.05 - 1.07

Series drawing

All measurements are in mm.

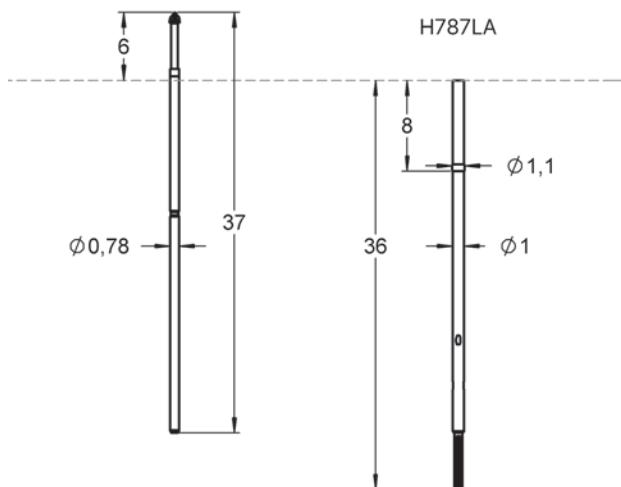

BASIC PROBES 50 MIL

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1001610	F76806B090G130	06 	0.90	B / G	130	-	-	-
1001611	F76807S090L130	07 	0.90	S / L	130	-	-	-
1001612	F76811B060G130	11 	0.60	B / G	130	-	-	-
1001613	F76818B060G130	18 	0.60	B / G	130	-	-	-
1001614	F76821S060L130	21 	0.60	S / L	130	-	-	-
1001615	F76828B090G130	28 	0.90	B / G	130	-	-	-
1001617	F76833S060L130	33 	0.60	S / L	130	-	-	-

BASIC PROBES 50 MIL



F767

Up to 3 A | 50 mil | ICT application

Electrical specifications

Current [A]	3
R TYP [mOhm]	<40

Mechanical specifications

Temperature [°C]	-45°...+100°
Preload [cN]	30 30
Spring force [cN] at nt ±20%	100 165
Nominal travel [mm]	6.4 6.4
Maximum travel [mm]	8.0 8.0

Materials and plating

Plunger	BeCu	gold plated
	Steel	longtime gold plated
Barrel	Bronze	gold plated
Spring	BeCu	gold plated
Receptacle	Bronze	gold plated


Accessories

1001860	H787LA	Receptacle
1008393	FEWZ-050EV	Insertion tool receptacle
1003576	FDWZ-050	Insertion tool probe

* Overview of other receptacles H787 on page 83

Series drawing

All measurements are in mm.

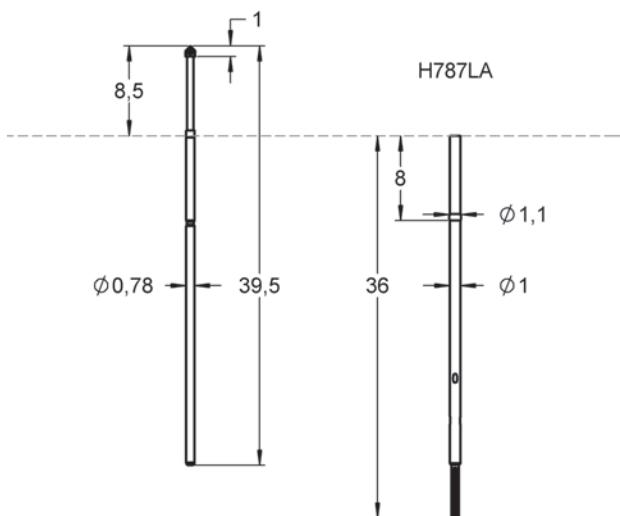

Drill size recommendation (mm)

H787...	Press ring as stop	0.99 - 1.00
H787...	Press ring inserted	1.05 - 1.07

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1019083	F76705B090G165	05	0.90	B / G	165	-	-	-
1004457	F76707S090L165	07	0.90	S / L	165	-	-	-
1004453	F76721S060L165	21	0.60	S / L	165	-	-	-
1031090	F76733S060L100H	33	0.60	S / L	165	-	H	-
1004447	F76733S060L165	33	0.60	S / L	180	-	-	-

BASIC PROBES 50 MIL



H767

Receptacles | 050 mil |
For Probe types F788, F767, F768

Materials and plating

Receptacle	Brass	gold plated
------------	-------	-------------

Accessories

1008393	FEWZ-050EV	Insertion tool receptacle
1014313	FEWZ-050EO	Insertion tool receptacle


Drill size recommendation (mm)

H787...	Press ring as stop	0.99 - 1.00
H787...	Press ring inserted	1.05 - 1.07


Order code	Product name	Press ring position [mm]	CXN
1001860	H787LA	8.0	LA
1001854	H787CR	8.0	CR
1001861	H787LI	8.0	CR
1001853	H787AE	-	-
1012107	H050VS	2.5	-

Series drawing


All measurements are in mm.

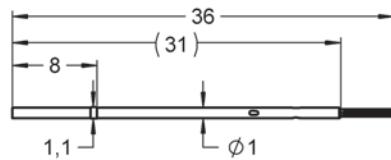



H787LA

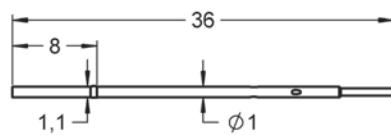

H787CR

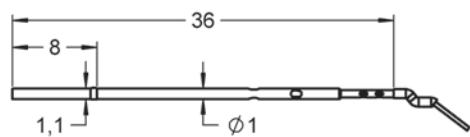

H787LI

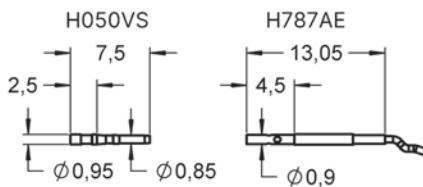

The insertion depth 31 mm and outer diameter are the same for all receptacles shown above. Different dimensions are listed.

BASIC PROBES 50 MIL



F111

Up to 3 A | 50 mil | Limited space

Electrical specifications

Current [A]	3
R Typ [mOhm]	<65

Mechanical specifications

Temperature [°C]	-45°...+100°
Preload [cN]	20 20
Spring force [cN] at nt ±20%	40 85
Nominal travel [mm]	2.0 2.0
Maximum travel [mm]	2.8 2.8

Materials and plating

	BeCu	gold plated
Plunger		longtime gold plated
	Steel	nickel plated
		rhodium plated
Barrel	Bronze	gold plated
Spring	Spring steel	silver plated
Receptacle	Nickel silver	gold plated


Accessories

1024435	H111LA-2.5	Receptacle
1093953	FEWZ-111E25	Insertion tool receptacle
1000180	FEWZ-040EO	Insertion tool receptacle
1003576	FDWZ-050	Insertion tool probe

* Overview of other receptacles H111 on page 88

Series drawing

All measurements are in mm.

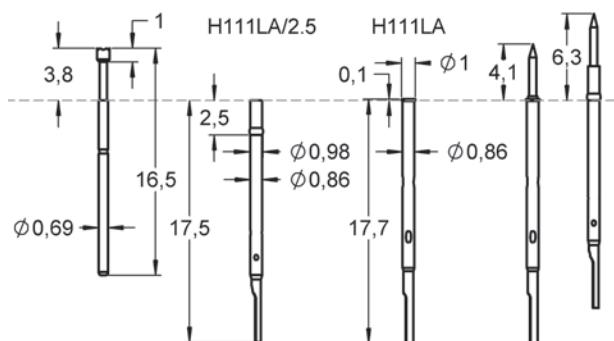

Drill size recommendation (mm)

H111...	Press ring inserted	0.88 - 0.92
H111...	With collar	0.83 - 0.84

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1001401	F11101S053N040	01 ↘	0.53	S / N	40	-	-	-
1001402	F11101S053N085	01 ↘	0.53	S / N	85	-	-	-
1001403	F11103S053N085	03 ↘	0.53	S / N	85	-	-	-

BASIC PROBES 50 MIL

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1085820	F11105S090L040	05	0.90	S / L	40	-	-	-
1001404	F11105S090L085	05	0.90	S / L	85	-	-	-
1003452	F11105S150L085	05	1.50	S / L	85	-	-	-
1001218	F11106B090G040	06	0.90	B / G	40	-	-	-
1017909	F11106B090G085	07	0.90	B / G	85	-	-	-
1001406	F11107S090N040	07	0.90	S / N	40	-	-	-
1001407	F11107S090N085	07	0.90	S / N	85	-	-	-
1001408	F11109S090N040	09	0.90	S / N	40	-	-	-
1001409	F11109S090N085	09	0.90	S / N	85	-	-	-
1001411	F11112S090L040	12	0.90	S / L	40	-	-	-
1001412	F11112S090L085	12	0.90	S / L	85	-	-	-
1001414	F11114S090N040	14	0.90	S / N	40	-	-	-
1001415	F11114S090N085	14	0.90	S / N	85	-	-	-
1056795	F11117B090G040	17	0.90	B / G	40	-	-	-
1001350	F11118S053N040	18	0.90	S / N	40	-	-	-
1001351	F11118S053N085	18	0.90	S / N	85	-	-	-
1001352	F11118S053R085	18	0.90	S / R	85	-	-	-
1001354	F11121S053N040	21	0.90	S / N	40	-	-	-
1001355	F11121S053N085	21	0.53	S / N	85	-	-	-

BASIC PROBES 50 MIL



F111H

Up to 3 A | 50 mil | Limited space

Electrical specifications

Current [A]	3
R Typ [mOhm]	<65

Mechanical specifications

Temperature [°C]	-45°...+200°
Preload [cN]	40
Spring force [cN] at nt ±20%	95
Nominal travel [mm]	2.0
Maximum travel [mm]	2.8

Materials and plating

Plunger	Steel	longtime gold plated
		nickel plated
		rhodium plated
Barrel	Bronze	gold plated
Spring	Stainless steel	unplated
Receptacle	Nickel silver	gold plated

Accessories

1024435	H111LA-2.5	Receptacle
1093953	FEWZ-111E25	Insertion tool receptacle
1000180	FEWZ-040E0	Insertion tool receptacle
1003576	FDWZ-050	Insertion tool probe


* Overview of other receptacles H111 on page 88

Drill size recommendation (mm)

H111...	Press ring inserted	0.88 - 0.92
H111...	With collar	0.83 - 0.84

Series drawing

All measurements are in mm.

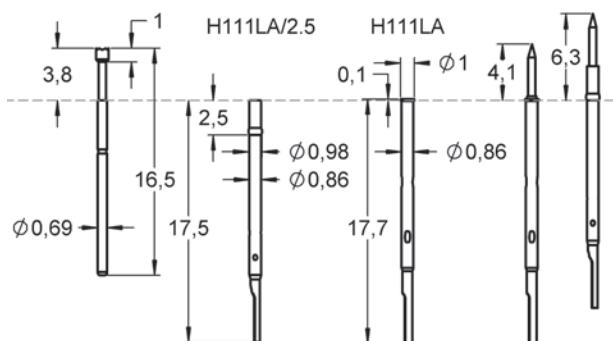

BASIC PROBES 50 MIL

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1001405	F11105S090L095H	05 	0.90	S / L	95	-	H	-
1001410	F11109S090N095H	09 	0.90	S / N	95	-	H	-
1001413	F11112S090L095H	12 	0.90	S / L	95	-	H	-
1013356	F11118S053L095H	18 	0.53	S / L	95	-	H	-
1001353	F11118S053R095H	18 	0.53	S / R	95	-	H	-
1084504	F11121S053N095H	21 	0.53	S / N	95	-	H	-

BASIC PROBES 50 MIL



H111

Receptacles | 050 mil |
For Probe types F111, F112

Materials and plating

Receptacle	Bronze	gold plated
------------	--------	-------------

Accessories

1093953	FEWZ-111E25	Insertion tool receptacle
1000180	FEWZ-040E0	Insertion tool receptacle


Drill size recommendation (mm)

H111...	Press ring inserted	0.88 - 0.92
H111...	With collar	0.83 - 0.84

Order code	Product name	Press ring position [mm]	CXN
1024435	H111LA/2.5	2.5	LA
1001691	H111LA	0.1	LA
1003472	H111LA1	0.1	LA
1003523	H111LA2	0.1	LA
1001690	H111CR	0.1	CR
1035075	H111CRS1	0.1	CR
1004576	H111WW1	0.1	WW
1004591	H111WW2	0.1	WW
1001692	H111LI	0.1	LI

Series drawing

All measurements are in mm.

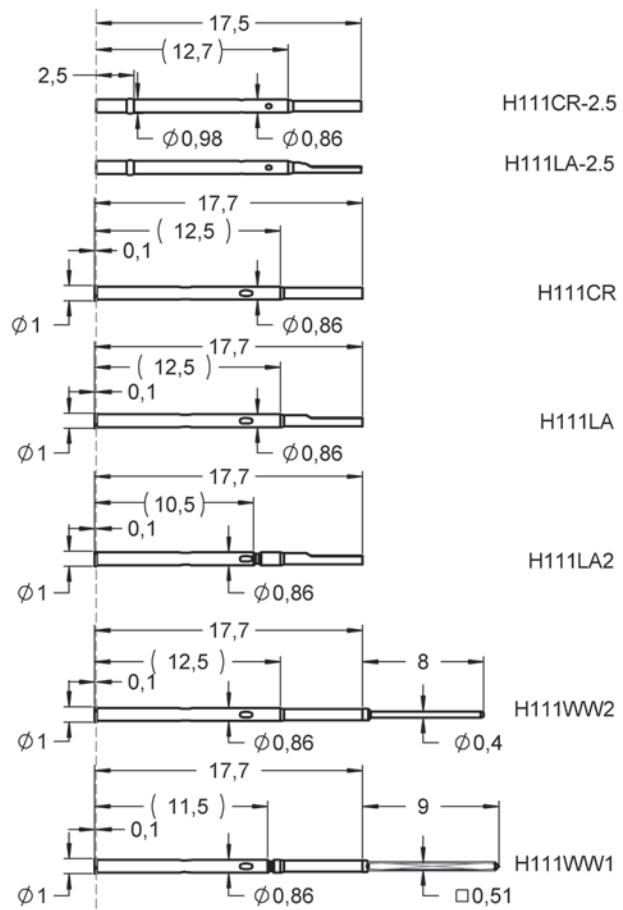

BASIC PROBES 30-40 MIL



F040

Up to 3 A | 40 mil | ICT application

Electrical specifications

Current [A]	2
R Typ [mOhm]	<20

Mechanical specifications

Temperature [°C]	-45°...+100°
Preload [cN]	40
Spring force [cN] at nt ±20%	80
Nominal travel [mm]	4.3
Maximum travel [mm]	6.4

Materials and plating

Plunger	BeCu	gold plated
Barrel	Bronze	gold plated
Spring	Spring steel	gold plated
Receptacle	Nickel silver	gold plated


Accessories

1000157	H040CR-7.9	Receptacle
1000156	H040DR-7.9	Receptacle
1000180	FEWZ-040EO	Insertion tool receptacle
1003576	FDWZ-050	Insertion tool probe

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1032015	F04015S060L080	15	0.60	S / L	80	-	-	-
1000144	F04018S038L080	18	0.38	S / L	80	-	-	-
1000143	F04029S038L080	29	0.38	S / L	80	-	-	-
1000145	F04033S038L080	33	0.38	S / L	80	-	-	-
1140612	F04033S038P080HP	33	0.38	S / P	80	-	HP	-
1000146	F04043S038L080	43	0.38	S / L	80	-	-	-
1124160	F04043S038P080HP	43	0.38	S / P	80	-	HP	-

Series drawing

All measurements are in mm.

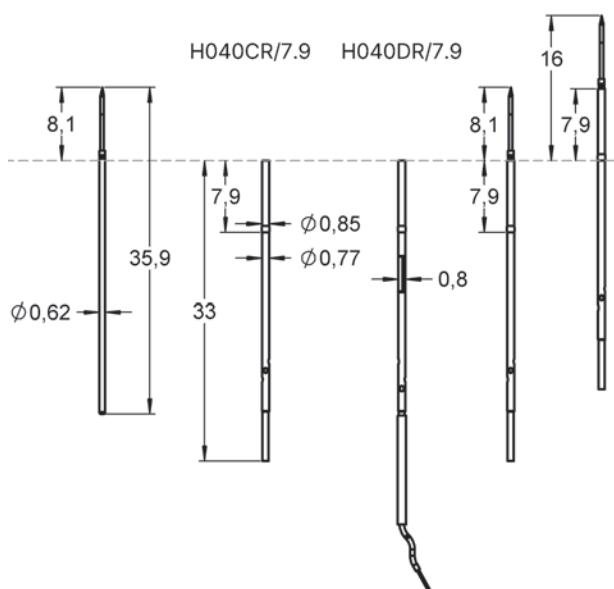

Drill size recommendation (mm)

H040...	Press ring as stop	0.80 - 0.81
H040...	Press ring inserted	0.82 - 0.83

BASIC PROBES 30-40 MIL



F039

Up to 3 A | 40 mil | ICT application

Electrical specifications

Current [A]	2
R Typ [mOhm]	<150

Mechanical specifications

Temperature [°C]	-45°...+100°		
Preload [cN]	10	40	60
Spring force [cN] at nt ±20%	30	80	130
Nominal travel [mm]	2.0	2.0	2.0
Maximum travel [mm]	3.7	3.7	3.7

Materials and plating

Plunger	BeCu	gold plated
	Stainless steel	gold plated
Barrel	Bronze	gold plated
Spring	Spring steel	silver plated

Accessories


1026287	H039-0001	Connecting element
1052633	FDWZ-039	Insertion tool probe

Drill size recommendation (mm)

For barrel-Ø of probe	0.77 - 0.79
-----------------------	-------------

Series drawing

All measurements are in mm.

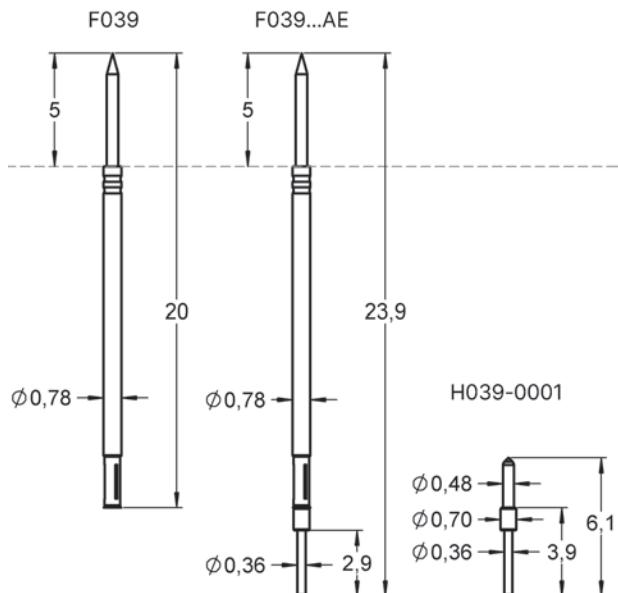

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1031462	F03918B050G130	18	0.50	B / G	130	-	-	-
1031463	F03965B050G130AE	18	0.50	B / G	130	-	AE	-
1026456	F03918E050M030	18	0.50	E / M	30	-	-	-
1026271	F03918E050M130	18	0.50	E / M	130	-	-	-
1026272	F03918E050M130AE	18	0.50	E / M	130	-	AE	-
1029030	F03918S050L130AE	18	0.50	S / L	130	-	AE	-

BASIC PROBES 30-40 MIL



F030

Up to 3 A | 30 mil | ICT application

Electrical specifications

Current [A]	2
R Typ [mOhm]	<20

Mechanical specifications

Temperature [°C]	-45°...+100°
Preload [cN]	10 40
Spring force [cN] at nt ±20%	30 80
Nominal travel [mm]	4.3 4.3
Maximum travel [mm]	6.4 6.4

Materials and plating

Plunger	BeCu	gold plated
	Stainless steel	gold plated
Barrel	Bronze	gold plated
Spring	Spring steel	silver plated

Accessories


1029337	H031AE	Connecting element
1052633	FDWZ-039	Insertion tool probe

Drill size recommendation (mm)

For barrel-Ø of probe	0.61 - 0.63
-----------------------	-------------


Series drawing

All measurements are in mm.

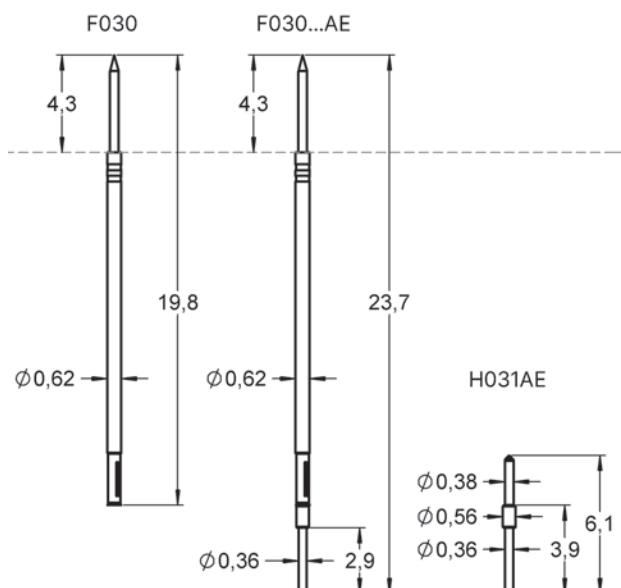

Order code

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1043595	F03018B038G080	18	0.38	B / G	80	-	-	-
1043596	F03018B038G080AE	18	0.38	B / G	80	-	AE	-
1030195	F03018E038M030	18	0.38	E / M	30	-	-	-
1030194	F03018E038M030AE	18	0.38	E / M	30	-	AE	-
1029317	F03018E038M080	18	0.38	E / M	80	-	-	-
1029318	F03018E038M080AE	18	0.38	E / M	80	-	AE	-

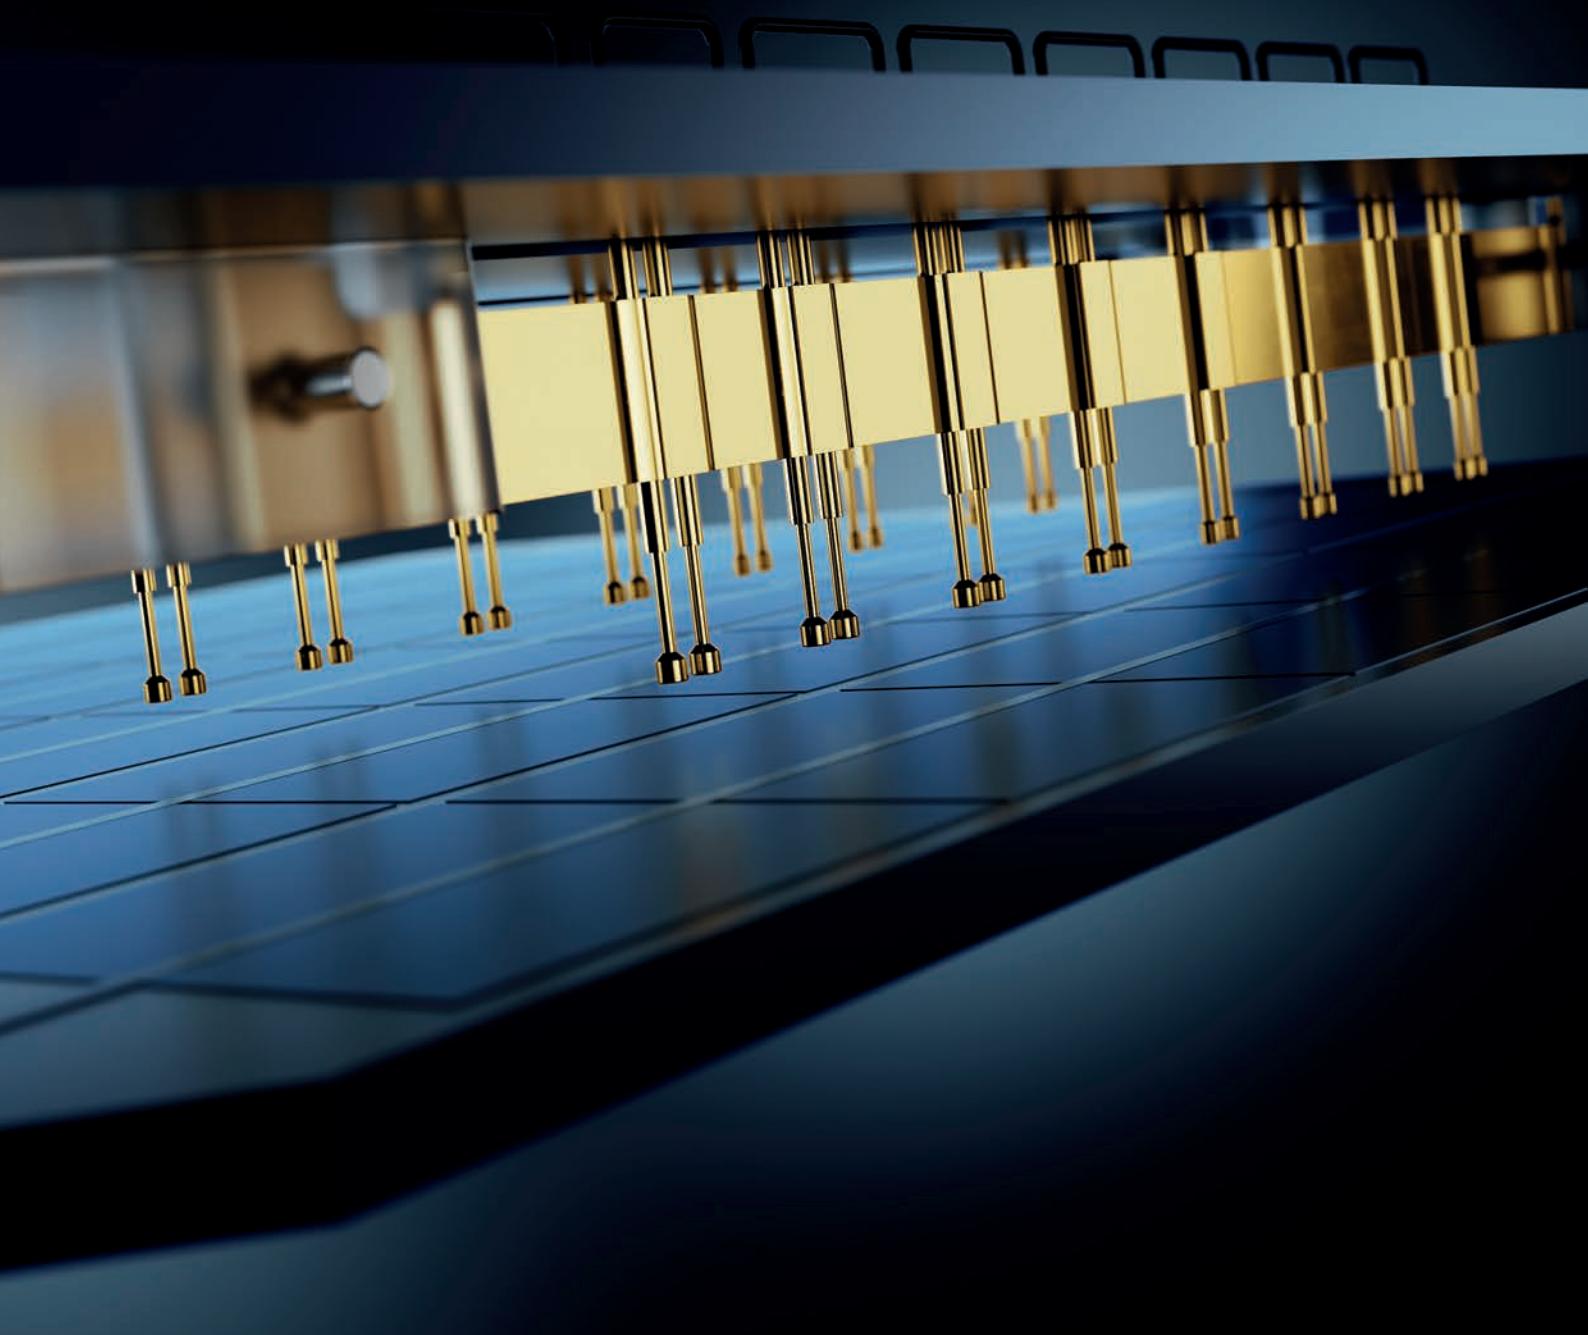

SOLAR TESTING

SOLAR PROBES



L100

Up to 5 A | 100 mil | Solarwafer-Test

Electrical specifications

Current [A]	5
R Typ [mOhm]	<20

Mechanical specifications


Temperature [°C]	-45°...+100°
Preload [cN]	35
Spring force [cN] at nt ±20%	100
Nominal travel [mm]	4.3
Maximum travel [mm]	6.4

Materials and plating

Plunger	BeCu	gold plated
	Silver	unplated
Barrel	Bronze	gold plated
Spring	Spring steel	silver plated
Receptacle	Brass	gold plated

Accessories


1010818	H100LA-7.6	Receptacle
1014264	FEWZ-100E0	Insertion tool receptacle
1003566	FDWZ-100	Insertion tool probe

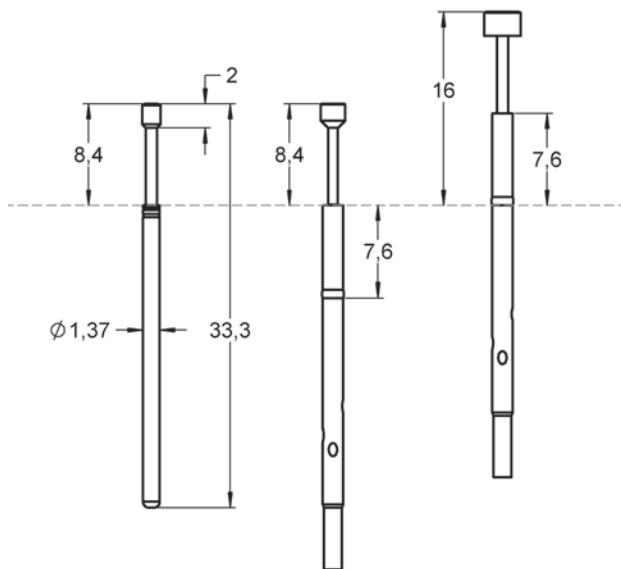

Drill size recommendation (mm)

Receptacle pressring as stop	1.67 - 1.69
Receptacle pressring inserted	1.70 - 1.75

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1054514	L10006B150G100	06	1.50	B / G	100	-	-	-
1054513	L10006B200G100	06	2.00	B / G	100	-	-	-
1042664	L10017B150G100	17	1.50	B / G	100	-	-	-
1042665	L10017B200G100	17	2.00	B / G	100	-	-	-
1094162	L10017B300G100	17	3.00	B / G	100	-	-	-

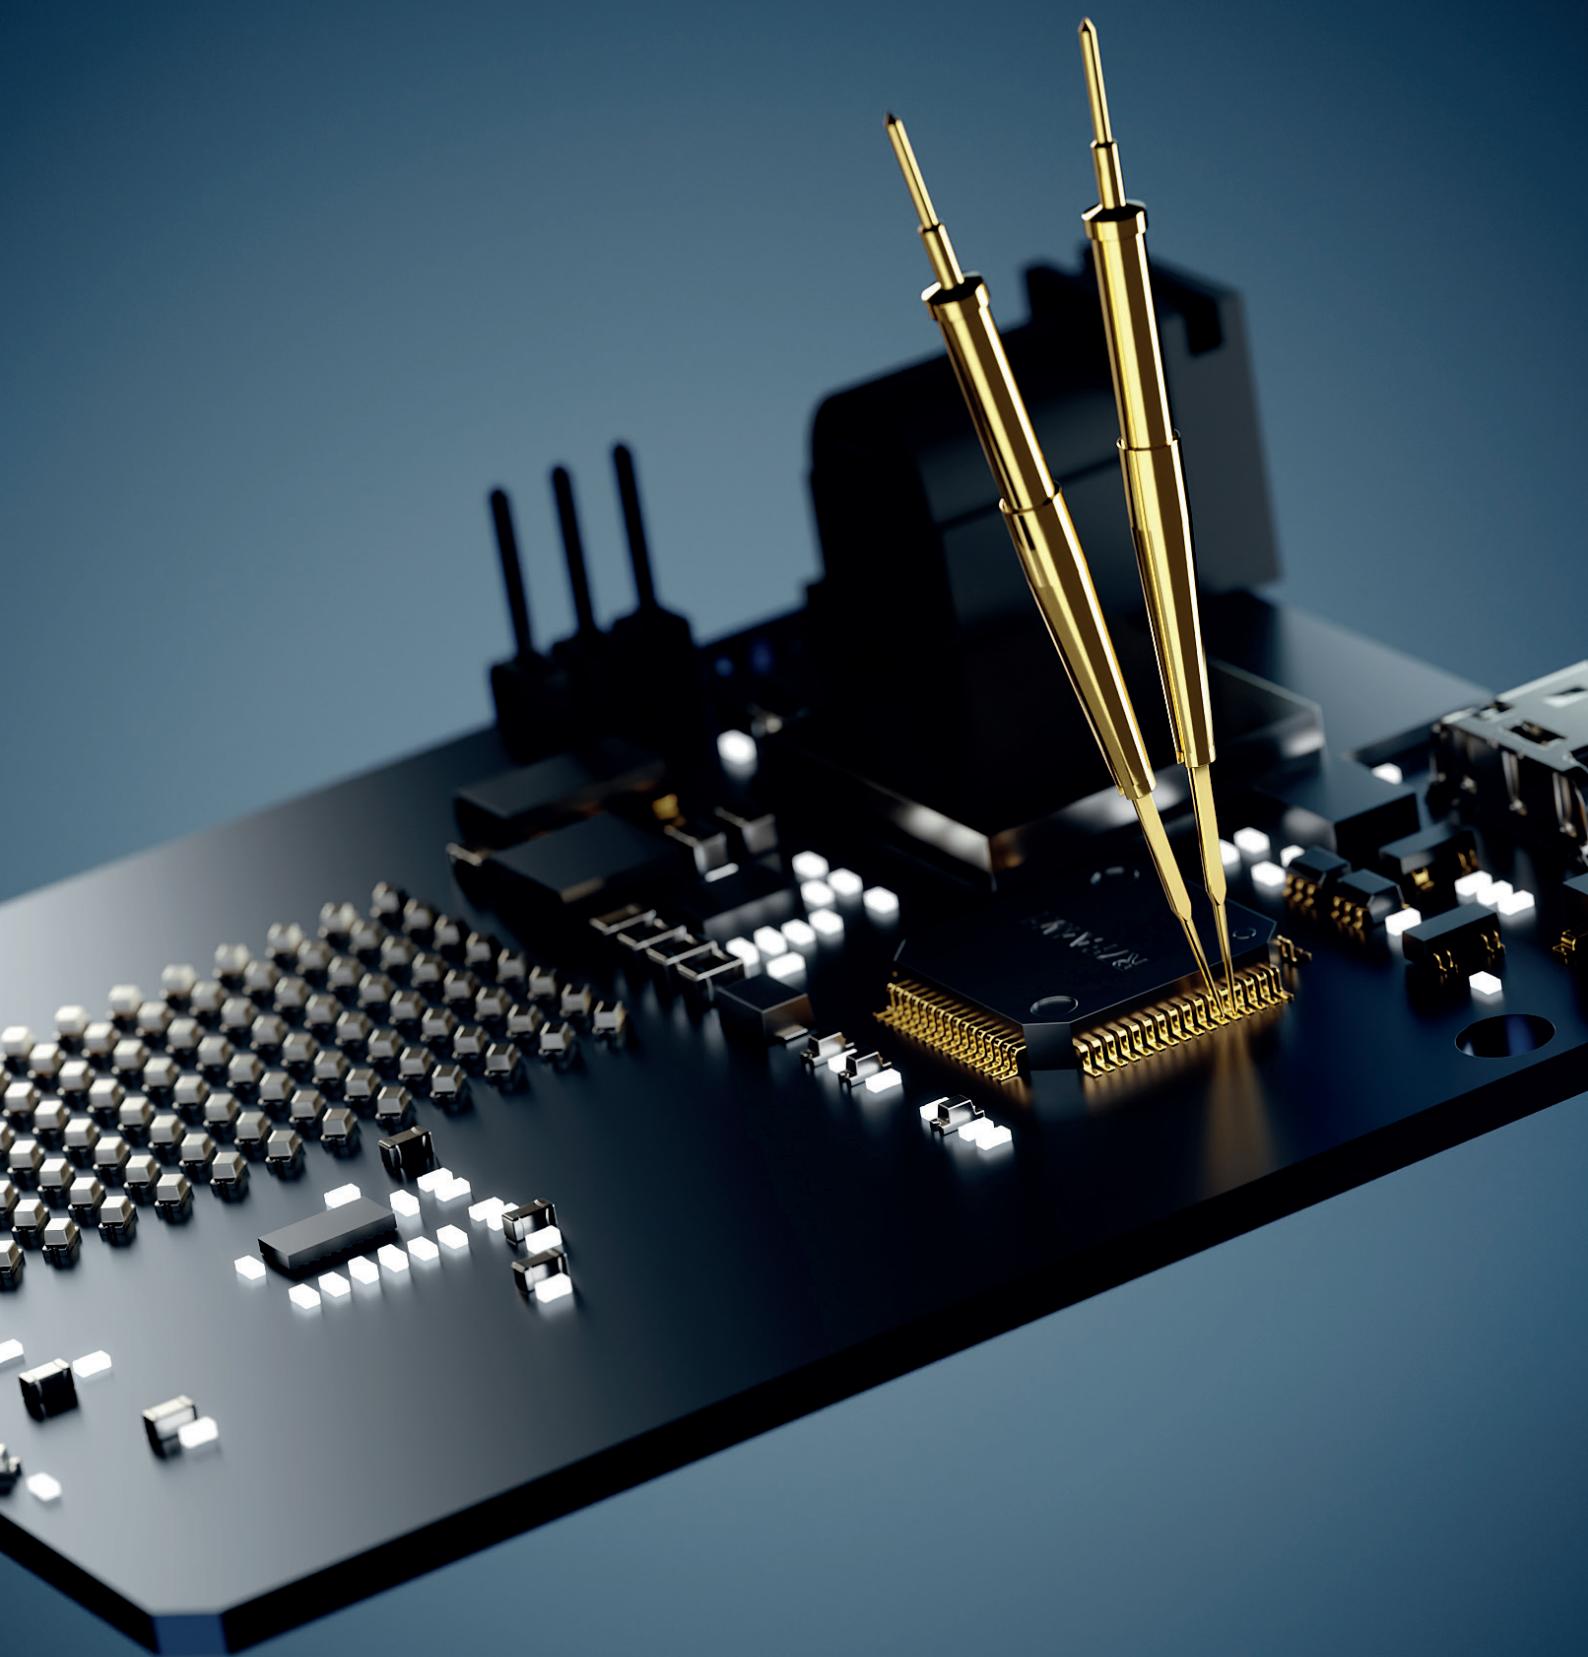


FLYING PROBES

PRODUCT NAME

Number code system

In order to improve the clarity of the material designations, the self-explanatory number code has been further developed. Therefore, all Flying Probes have been redefined according to the order code shown below.

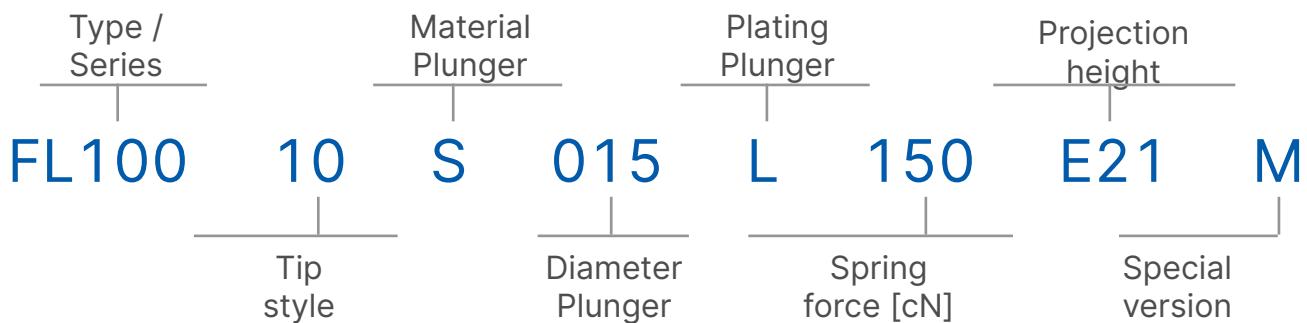

Material Plunger

- B = BeCu (Beryllium Copper)
- P = Palladium alloy
- S = Steel

Diameter

015 = 0.15 mm

Plating Plunger

- G = Gold plating
- L = Longtime gold plating
- N = Nickel plating
- U = Unplated
- P = Functional plating progressive series
- R = Rhodium plating
- S = Silver plating

Spring force

150 = 150 cN

Special Version

- L = Long version
- S = Short version
- H = High temperature version
- HP = Progressive series
- M = Thread (e.g. M1.6×0.35)

Projection height

- E21 = Projection height 21 mm (e.g.)
- S = Short version
- L = Long version

FLYING PROBES



FL100

Up to 5 A | 100 mil |
For Seica Testsystems

Electrical specifications

Current [A]	5
R Typ [mOhm]	<25

Mechanical specifications

Temperature [°C]	-45°...+100°
Preload [cN]	60
Spring force [cN] at nt ±20%	150
Nominal travel [mm]	4.3
Maximum travel [mm]	6.4

Materials and plating

Plunger	Steel	Longtime gold plated
Barrel	Brass	gold plated
Spring	Spring steel	gold plated
Receptacle	Brass	gold plated

Accessories


1005355	H732LARD	Receptacle
1003640	FEWZ-772EO	Insertion tool receptacle
1004610	FWZ732T	Insertion tool probe

Drill size recommendation (mm)

1005355	H732LARD	2.00 - 2.02
---------	----------	-------------

Series drawing

All measurements are in mm.

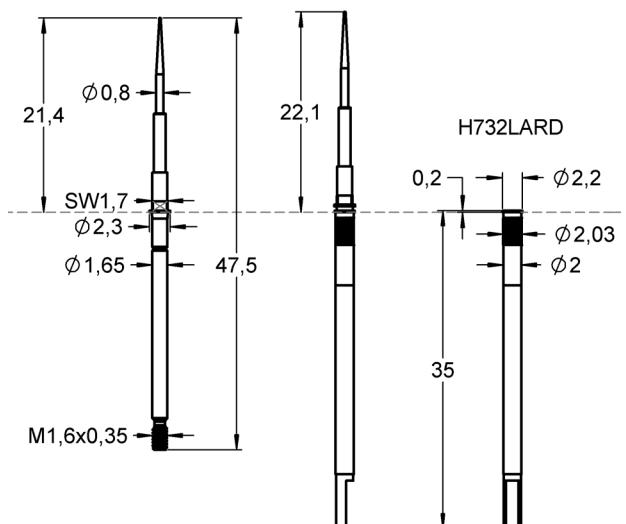

Order code Product name Tip Style Tip Ø [mm] Material/ Plating Force [cN] Thread [M] Version FM Choice

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1033253	FL10010S015L150E21M	10	0.15	S / L	150	M1.6x0.35	E21M	-
1033270	FL10030S060L150E21M	30	0.60	S / L	150	M1.6x0.35	E21M	-

FLYING PROBES



FL118

Up to 5 A | 118 mil |
For Scorpion Testsystems

Electrical specifications

Current [A]	5
R TYP [mOhm]	<20

Mechanical specifications

Temperature [°C]	-45°...+100°
Preload [cN]	50
Spring force [cN] at nt ±20%	150
Nominal travel [mm]	6.4
Maximum travel [mm]	8.0

Materials and plating

Plunger	Steel	Longtime gold plated
Barrel	Brass	gold plated
Spring	Spring steel	gold plated
Receptacle	Brass	gold plated

Accessories

1005355	H732LARD	Receptacle
1003640	FEWZ-772EO	Insertion tool receptacle
1004610	FWZ732T	Insertion tool probe


Drill size recommendation (mm)

1005355	H732LARD	2.00 - 2.02
---------	----------	-------------

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1010899	FL11818S100L150E19M	18	1.00	S / L	150	M1.6x0.35	E19M	-

Series drawing

All measurements are in mm.

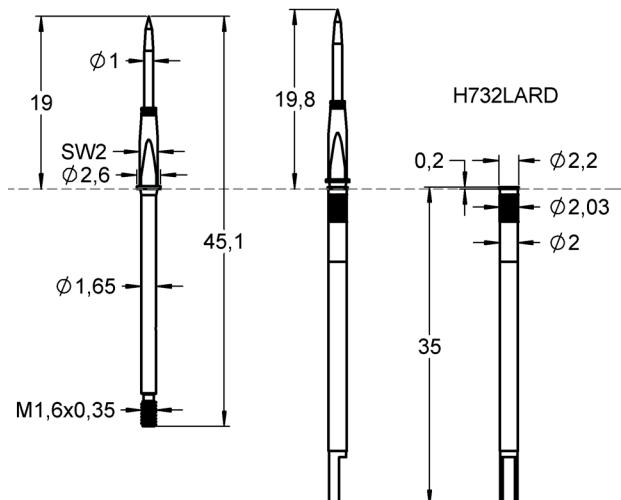

FLYING PROBES



FL118

Up to 1 A | 118 mil |
For Spea Testsystems

Electrical specifications

Current [A]	1
R Typ [mOhm]	<40

Mechanical specifications


Temperature [°C]	-45°...+100°
Preload [cN]	60
Spring force [cN] at nt ±20%	100
Nominal travel [mm]	2.0
Maximum travel [mm]	10.0

Materials and plating

Plunger	Steel	Longtime gold plated
Barrel	Brass	gold plated
Spring	Spring steel	gold plated

Series drawing

All measurements are in mm.

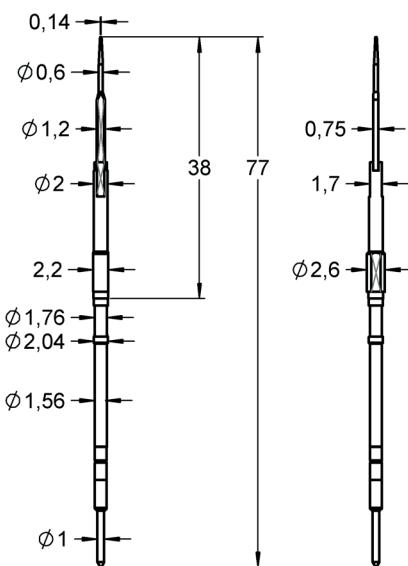

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1095118	FL11829S020L100E38C111-2	29	0.20	S / L	100	-	C111-2	-

FLYING PROBES



FL177

Up to 5 A | 177 mil |
For Seica Testsystems

Electrical specifications

Current [A]	1
R Typ [mOhm]	<40

Mechanical specifications


Temperature [°C]	-45°...+100°	
Preload [cN]	24	40
Spring force [cN] at nt ±20%	40	100
Nominal travel [mm]	2.0	2.0
Maximum travel [mm]	10.0	10.0

Materials and plating


Plunger	Steel	Longtime gold plated
Barrel	Brass	gold plated
Spring	Spring steel	gold plated

Series drawing

All measurements are in mm.

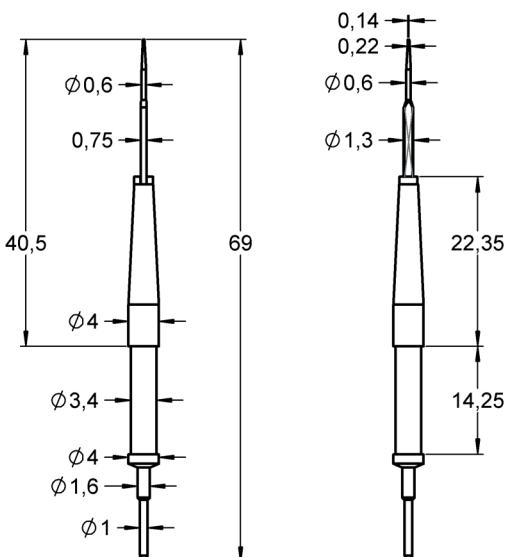

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1092272	FL17703S030L100A211	03	0.30	S / L	100	-	A211	-
1092266	FL17710S050L100A741	10	0.50	S / L	100	-	A741	-
1092274	FL17729S020L040A112	29	0.20	S / L	100	-	A112	-
1092271	FL17729S020L100A111	29	0.20	S / L	100	-	A111	-
1092269	FL17730S060L100A611	30	0.60	S / L	100	-	A611	-
1092273	FL17730S070L100A621	30	0.70	S / L	100	-	A621	-

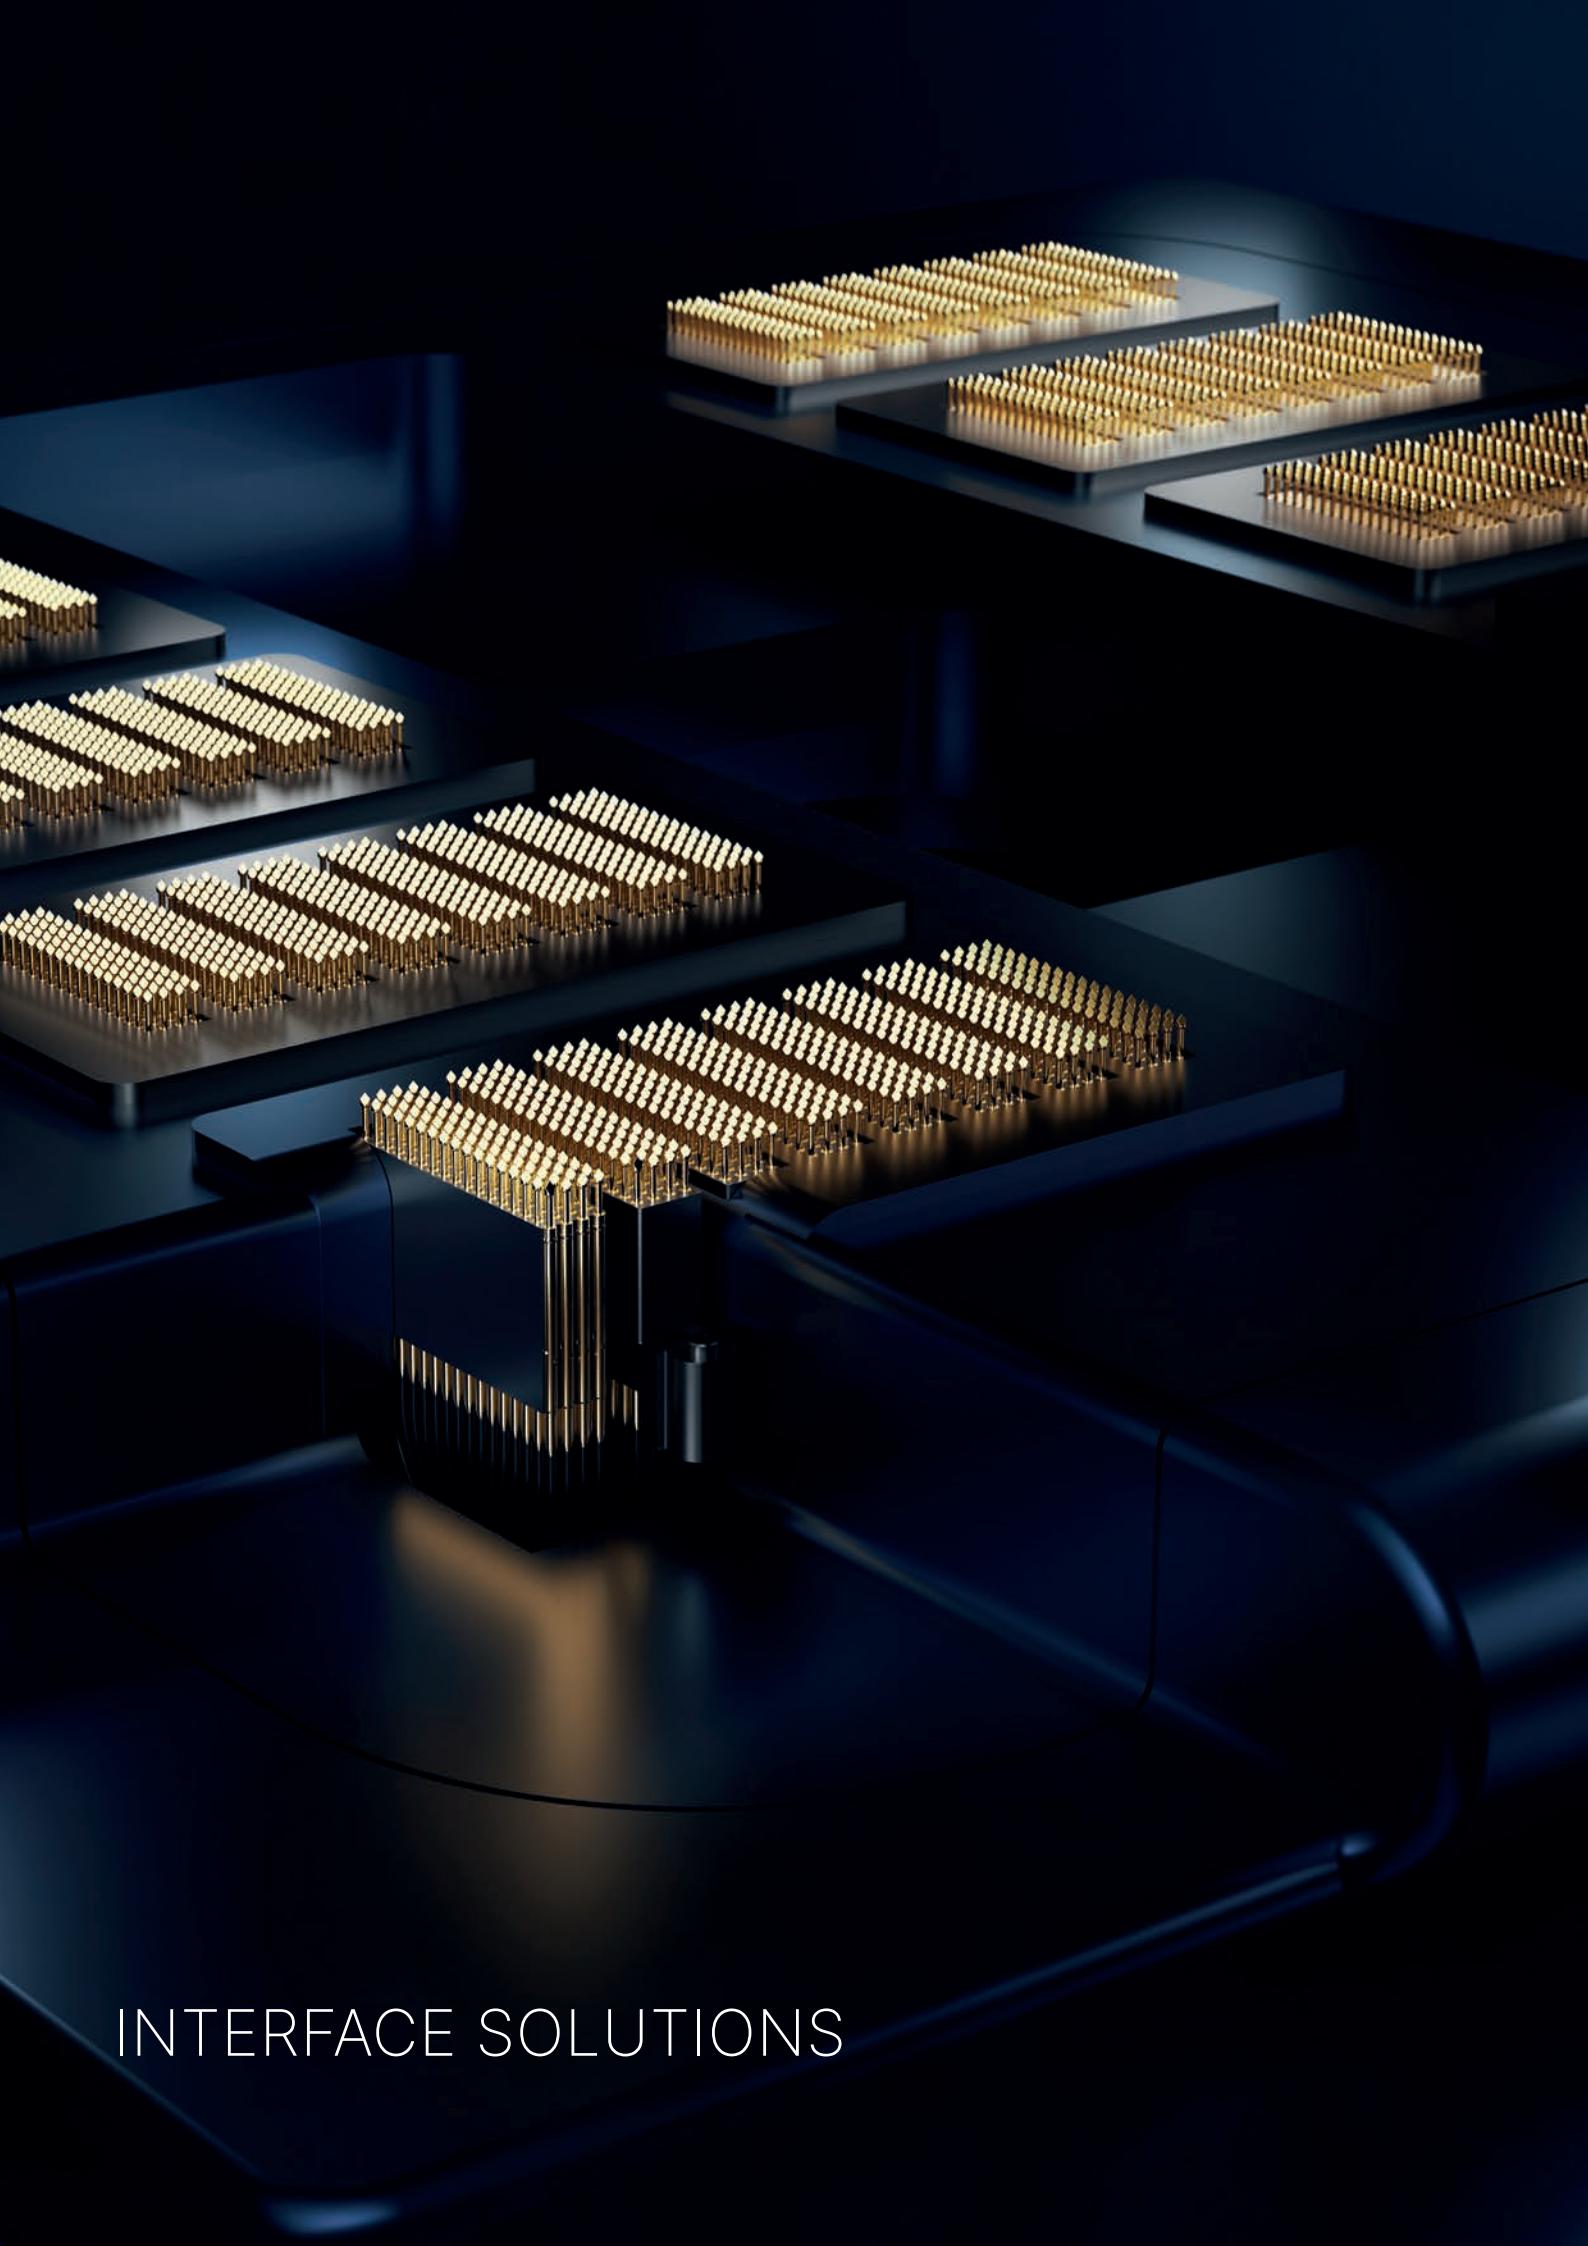

INTERFACE SOLUTIONS

INTERFACE PROBES



F504

Up to 5 A | 100 mil |
For Testsystem Genrad 227x / 228x

Electrical specifications

Current [A]	5
R TYP [mOhm]	<35

Mechanical specifications

Temperature [°C]	-45°...+100°		
Preload [cN]	40	60	80
Spring force [cN] at nt ±20%	100	130	150
Nominal travel [mm]	2.0	2.4	2.4
Maximum travel [mm]	3.9	3.2	3.2

Materials and plating

Plunger	BeCu	gold plated
Barrel	Nickel silver	gold plated
Spring	BeCu	silver plated
	Spring steel	silver plated
Receptacle	Nickel silver	gold plated


Accessories

1001702	H502WW	Receptacle
1014264	FEWZ-100E0	Insertion tool receptacle
1003566	FDWZ-100	Insertion tool probe

* Overview of other receptacles H502 on page 48

Series drawing

All measurements are in mm.

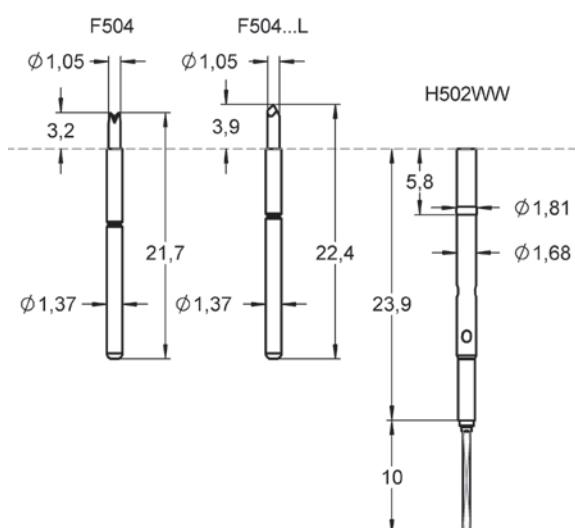

Drill size recommendation (mm)

Receptacle pressring as stop	1.67 - 1.69
Receptacle pressring inserted	1.70 - 1.75

Order code

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1001342	F50403B105G130L	03	1.05	B / G	130	-	L	-
1006323	F50418B105G100L	18	1.05	B / G	100	-	L	-
1013379	F50421B105G150	21	1.05	B / G	150	-	-	-
1006653	F50430B105G100L	30	1.05	B / G	100	-	L	-

INTERFACE PROBES



F502

Up to 5 A | 100 mil |
For Testsystem Luther & Maelzer

Electrical specifications

Current [A]	5
R TYP [mOhm]	<55

Mechanical specifications

Temperature [°C]	-45°...+100°
Preload [cN]	60
Spring force [cN] at nt ±20%	130
Nominal travel [mm]	2.7
Maximum travel [mm]	4.1

Materials and plating

Plunger	Steel	nickel plated
Barrel	Bronze	silver plated
Spring	Spring steel	silver plated
Receptacle	Nickel silver	gold plated

Accessories

1001702	H502WW	Receptacle
1014264	FEWZ-100E0	Insertion tool receptacle
1003566	FDWZ-100	Insertion tool probe


* Overview of other receptacles H502 on page 48

Drill size recommendation (mm)

Receptacle pressring as stop	1.67 - 1.69
Receptacle pressring inserted	1.70 - 1.75

Series drawing

All measurements are in mm.

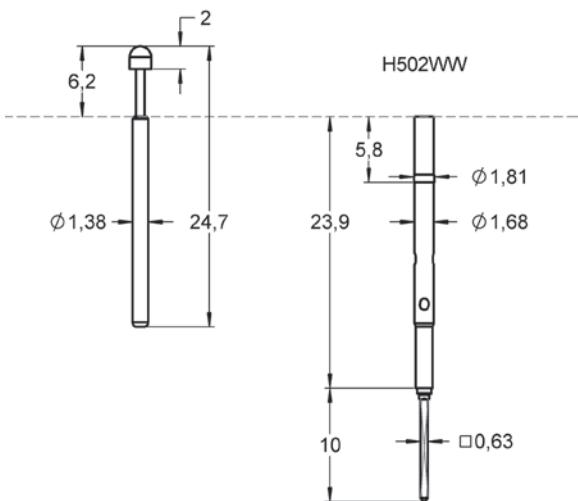

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1001375	F50203S076N130	03	0.76	S / N	130	-	-	-
1001377	F50209S190N130	09	1.90	S / N	130	-	-	-
1001341	F50212S190N130	12	1.90	S / N	130	-	-	-

INTERFACE PROBES



F538

Up to 5 A | 100 mil | For Testsystem
Digitaltest MTS300, L&M LP1800

Electrical specifications

Current [A]	5
R Typ [mOhm]	<55

Mechanical specifications

Temperature [°C]	-45°...+100°
Preload [cN]	60
Spring force [cN] at nt ±20%	220
Nominal travel [mm]	2.7
Maximum travel [mm]	4.0

Materials and plating

Plunger	Steel	nickel plated
Barrel	Bronze	silver plated
Spring	Spring steel	silver plated
Receptacle	Nickel silver	gold plated

Accessories

1001702	H502WW	Receptacle
1014264	FEWZ-100EO	Insertion tool receptacle
1003566	FDWZ-100	Insertion tool probe


* Overview of other receptacles H502 on page 48

Drill size recommendation (mm)

Receptacle pressring as stop	1.67 - 1.69
Receptacle pressring inserted	1.70 - 1.75

Series drawing

All measurements are in mm.

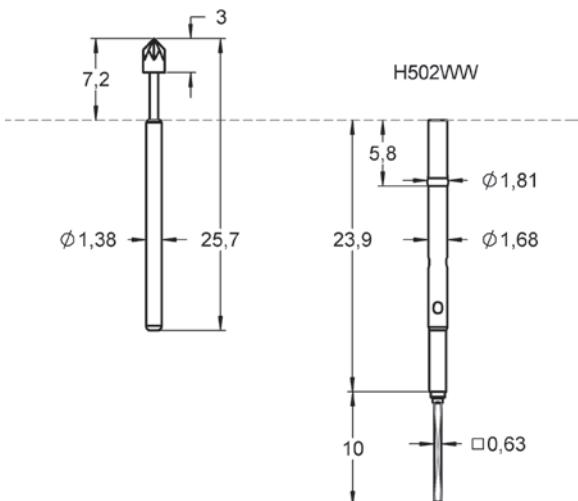

Order code	Product name	Tip Style	Tip Ø [mm]	Material/ Plating	Force [cN]	Thread [M]	Version	FM Choice
1001344	F53807S130N220	07	1.30	S / N	220	-	-	-
1001345	F53807S190N220	07	1.30	S / N	220	-	-	-

INTERFACE PROBES



F100

Up to 5 A | 100 mil | Mint Pin
for Agilent Testsystem

Electrical specifications

Current [A]	5
R Typ [mOhm]	<20

Mechanical specifications

Temperature [°C]	-45°...+100°
Preload [cN]	80 80
Spring force [cN] at nt ±20%	150 200
Nominal travel [mm]	4.3 4.3
Maximum travel [mm]	6.4 6.4

Materials and plating

Plunger	BeCu	gold plated
Barrel	Brass	gold plated
Spring	Spring steel	silver plated
Receptacle	Nickel silver	gold plated

Accessories

1008392	FEWZ-100EV	Insertion tool receptacle
1003566	FDWZ-100	Insertion tool probe


* Overview of other receptacles H100 on page 34+35

Drill size recommendation (mm)

H100LA-7.6	Press ring as stop	1.67 - 1.69
H100LA-7.6	Press ring inserted	1.70 - 1.75

Series drawing

All measurements are in mm.

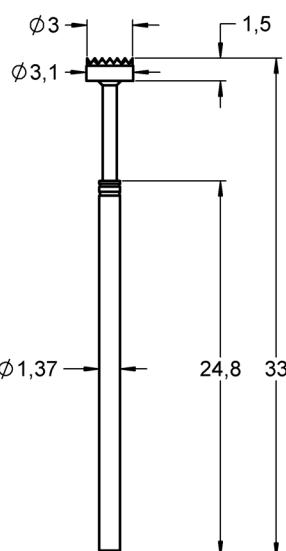

INTERFACE PROBES



F100

Up to 5 A | 100 mil |
for defined Testsystems

Electrical specifications

Current [A]	5
R Typ [mOhm]	<20

Mechanical specifications

Temperature [°C]	-45°...+100°
Preload [cN]	80 80
Spring force [cN] at nt ±20%	150 200
Nominal travel [mm]	4.3 4.3
Maximum travel [mm]	6.4 6.4

Materials and plating

Plunger	BeCu	gold plated
Barrel	Brass	gold plated
Spring	Spring steel	silver plated
Receptacle	Nickel silver	gold plated

Accessories

1008392	FEWZ-100EV	Insertion tool receptacle
1003566	FDWZ-100	Insertion tool probe


* Overview of other receptacles H100 on page 34+35

Drill size recommendation (mm)

H100LA-7.6	Press ring as stop	1.67 - 1.69
H100LA-7.6	Press ring inserted	1.70 - 1.75

Series drawing

All measurements are in mm.

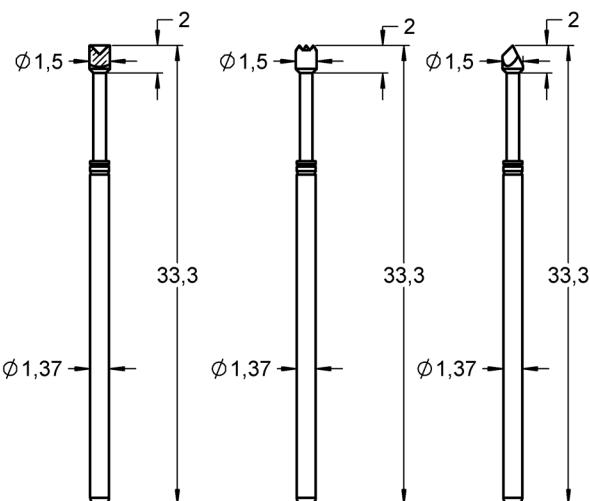


Order code	Product name	Tip style	Manufacturer	Testsystems
1011718	F10005B150G200	05	Spea	Easytest / Unitest
1013049	F10006B150G200	06	Spea	Easytest / Unitest
1017540	F10015B150G150	15	Factron	300/700 Schlumberger
1013342	F10015B150G200	15	Teradyne	Spectrum 885xx

PRODUCT NAME

Number code system

FEINMETALL interface blocks (Pylon blocks) are used as internal interface. The integrated spring contact probes guarantee a good signal transmission with low transfer resistances. This is only a selection of available signal blocks, further variants on request.

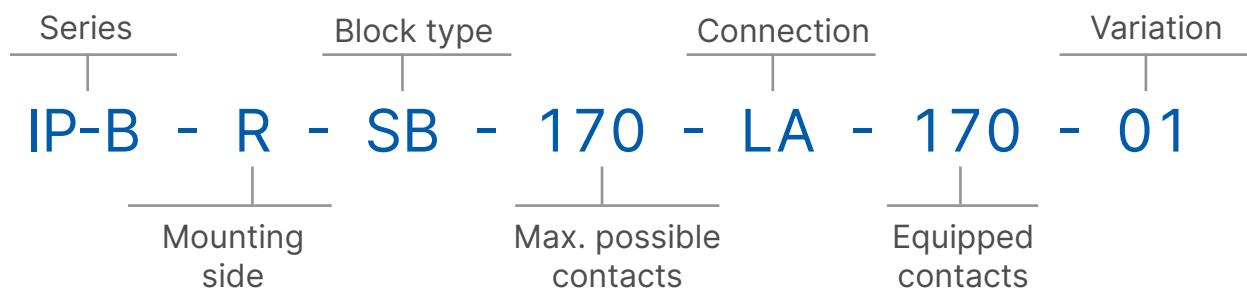**Mounting side**

- B = Both side possible
- F = Fixture side
- R = Receiver side

Max. possible contacts / poles

- for example:
- 001 = 1 Pole
- 030 = 30 Pole
- 085 = 85 Pole
- 170 = 170 Pole

Block type

- SB = Signal block
- HF = High frequency block
- HS = High current block
- PB = Pneumatic block
- BB = Blind block

Equipped contacts / poles

- for example:
- 001 = 1 Pole
- 030 = 30 Pole
- 085 = 85 Pole
- 170 = 170 Pole

Connection


- CR = Crimp
- LA = Solder
- WW = Wire wrap
- WR = Round pin
- WL = Wireless

May deviate from the maximum possible contacts.

Variation

- 01 ... 02...
- Continuous number for different insertion of receptacles, pins or contact probes.

INTERFACE SOLUTIONS




Signal Block 8 pole

Order Code	1010995	IP-B-R-PB-008-AE-008-01
Receptacle	-	-
Contact Probe	1001852	I-Z1
Receiver side	Pneumatic connection	



Signal Block 8 pole

Order Code	1010996	IP-B-F-PB-008-AE-008-01
Receptacle	-	-
Contact Probe	1011034	Pneumatic connection
Fixture side	Pneumatic connection	




Signal Block 20 pole (max. 20 A*)

Order Code	1011003	IP-B-R-HS-020-LA-020-02
Receptacle	1005065	H735LA
Contact Probe	1005053	F73506B400G300C
Receiver side	Solder connection	




Signal Block 20 pole (max. 20 A*)

Order Code	1011002	IP-B-F-HS-020-LA-020-01
Receptacle	-	-
Contact Probe	1012256	I-P20LA-2.5
Fixture side	Solder connection	



Signal Block 15+3 pole (max. 5 A*)

Order Code	1017409	IP-B-R-HF-015-LA-015-01
Receptacle	1001700	H502LA
Contact Probe	1012573	H860
Receiver side	Solder connection	
Order Code	1006653	F50430B105G100L
Receptacle	1012583	HF86002B0001G530




Signal Block 15+3 pole (max. 5 A*)

Order Code	1019385	IP-B-F-SB-030-LA-030-01
Receptacle	1001700	H502LA
Contact Probe	1009768	I-Z1S2
Fixture side	Solder connection	

* The sum of the currents lead to a heating of the blocks due to power loss. The maximum allowed rise of this temperature is limited to 80 Kelvin.

INTERFACE SOLUTIONS




Signal Block 32 pole (max. 20 A*)

Order Code	1004814	IP-B-R-HS-032-LA-032-01
Receptacle	1143975	H564LA-7.6
Contact Probe	1143969	F56406B400G285C
Receiver side	Solder connection	



Signal Block 32 pole (max. 20 A*)

Order Code	1004815	IP-B-F-HS-032-LA-032-01
Receptacle	-	-
Contact Probe	1144032	Interface pin
Fixture side	Solder connection	




Signal Block 85 pole (max. 5 A*)

Order Code	1016321	IP-B-R-SB-085-WW-085-01
Receptacle	1001702	H502WW
Contact Probe	1006653	F50430B105G100L
Receiver side	Wire Wrap connection	




Signal Block 85 pole (max. 20 A*)

Order Code	1010964	IP-B-F-SB-085-LA-085-02
Receptacle	-	-
Contact Probe	1007279	I-C17LA-2
Fixture side	Solder connection	



Signal Block 145 pole (max. 5 A*)

Order Code	1010965	IP-B-R-SB-145-LA-145-01
Receptacle	1001700	H502LA
Contact Probe	1006653	F50430B105G100L
Receiver side	Solder connection	



Signal Block 85 pole (max. 15 A*)

Order Code	1016626	IP-B-F-SB-085-LA-085-01
Receptacle	1001700	H502LA
Contact Probe	1009768	I-Z1S2
Fixture side	Solder connection	


¹ * The sum of the currents lead to a heating of the blocks due to power loss. The maximum allowed rise of this temperature is limited to 80 Kelvin.

INTERFACE SOLUTIONS



Signal Block 170 pole (max. 5 A*)

Order Code	1010546	IP-B-R-SB-170-LA-170-01
Receptacle	1001700	H502LA
Contact Probe	1001342	F50403B104G130L
Receiver side	Solder connection	




Signal Block 145 pole (max. 5 A*)

Order Code	1010966	IP-B-F-SB-145-LA-145-01
Receptacle	1001700	H502LA
Contact Probe	1009768	I-Z1S2
Fixture side	Solder connection	




Signal Block 170 pole (max. 5 A*)

Order Code	1010545	IP-B-R-SB-170-WW-170-03
Receptacle	1001702	H502WW
Contact Probe	1001342	F50403B104G130L
Receiver side	Wire Wrap connection	



Signal Block 170 pole (max. 5 A*)

Order Code	1010513	IP-B-F-SB-170-WW-170-01
Receptacle	-	-
Contact Probe	1001843	I-G1
Fixture side	Wire Wrap connection	



Signal Block 170 pole (max. 5 A*)

Order Code	1011217	IP-B-R-SB-170-WW-170-02
Receptacle	1001702	H502WW
Contact Probe	1006653	F50430B105G100L
Receiver side	Wire Wrap connection	



Signal Block 170 pole (max. 10 A*)

Order Code	1089601	IP-B-F-SB-170-WW-170-02
Receptacle	-	-
Contact Probe	1001852	I-Z1
Fixture side	Wire Wrap connection	

* The sum of the currents lead to a heating of the blocks due to power loss. The maximum allowed rise of this temperature is limited to 80 Kelvin.

INTERFACE SOLUTIONS



Interface pins (max. 40 A*)

Order Code	1017929	P1S3
Material	BeCu	gold plated
Current [A]	40	
Connection	Thread M3	



Interface pins (max. 40 A*)

Order Code	1017928	P1S2
Material	BeCu	gold plated
Current [A]	40	
Connection	Solder connection	



Interface pins (max. 10 A*)

Order Code	1018248	I-P1S4
Material	Brass	gold plated
Current [A]	10	
Connection	Wire Wrap connection	



Interface pins (max. 30 A*)

Order Code	1001779	I-P1
Material	Brass	rhodium plated
Current [A]	30	
Connection	Solder connection	



Interface pins (max. 30 A*)

Order Code	1015067	I-P16LA-0.9
Material	Brass	gold plated
Current [A]	30	
Connection	Solder connection	



Interface pins (max. 30 A*)

Order Code	1012256	I-P20LA-2.5
Material	Brass	gold plated
Current [A]	30	
Connection	Solder connection	

¹ * The sum of the currents lead to a heating of the blocks due to power loss. The maximum allowed rise of this temperature is limited to 80 Kelvin.

INTERFACE SOLUTIONS



Interface pins (max. 20 A*)

Order Code	1007279	I-C17LA-2
Material	Brass	gold plated
Current [A]	20	
Connection	Solder connection	



Interface pins (max. 20 A*)

Order Code	1007282	I-D17LA-2
Material	Brass	gold plated
Current [A]	20	
Connection	Solder connection	



Interface pins (max. 20 A*)

Order Code	1007280	I-C18LA-3
Material	Brass	gold plated
Current [A]	20	
Connection	Solder connection	



Interface pins (max. 10 A*)

Order Code	1007284	I-D23WW-3
Material	Brass	gold plated
Current [A]	10	
Connection	Wire Wrap connection	



Interface pins (max. 10 A*)

Order Code	1007170	I-C22WW-2
Material	Brass	gold plated
Current [A]	10	
Connection	Wire Wrap connection	



Interface pins (max. 10 A*)

Order Code	1007302	I-D22WW-2
Material	Brass	gold plated
Current [A]	10	
Connection	Wire Wrap connection	

* The sum of the currents lead to a heating of the blocks due to power loss. The maximum allowed rise of this temperature is limited to 80 Kelvin.

INTERFACE SOLUTIONS



Interface pins (max. 10 A*)

Order Code	1091862	I-D32WW-12
Material	Brass	gold plated
Current [A]	10	
Connection	Wire Wrap connection	



Interface pins (max. 10 A*)

Order Code	1001843	I-G1
Material	Brass	gold plated
Current [A]	10	
Connection	Wire Wrap connection	



Interface pins (max. 10 A*)

Order Code	1003858	I-G1S1
Material	Brass	gold plated
Current [A]	10	
Connection	Wire Wrap connection	



Interface pins (max. 10 A*)

Order Code	1006531	I-G1S2
Material	Brass	gold plated
Current [A]	10	
Connection	Wire Wrap connection	



Interface pins (max. 10 A*)

Order Code	1014545	I-G1S4
Material	Brass	gold plated
Current [A]	10	
Connection	Wire Wrap connection	



Interface pins (max. 10 A*)

Order Code	1001852	I-Z1
Material	Brass	gold plated
Current [A]	10	
Connection	Wire Wrap connection	

¹ * The sum of the currents lead to a heating of the blocks due to power loss. The maximum allowed rise of this temperature is limited to 80 Kelvin.

INTERFACE SOLUTIONS



Interface pins (max. 10 A*)

Order Code	1016368	I-Z1WR-0.8
Material	Brass	gold plated
Current [A]	10	
Connection	Round Pin	connection



Interface pins (max. 15 A*)

Order Code	1009768	I-Z1S2
Material	Brass	gold plated
Current [A]	15	
Connection	Round Pin	connection



Interface pins (max. 10 A*)

Order Code	1013460	I-G1S3
Material	Brass	gold plated
Current [A]	10	
Connection	Round Pin	connection



Interface pins (max. 10 A*)

Order Code	1014796	I-P18WR-0.8
Material	Brass	gold plated
Current [A]	10	
Connection	Round Pin	connection



Rigid probe

Order Code	1036023	33125
Material	BeCu	gold plated
Current [A]	5.0	
Connection	Round pin	



Rigid probe

Order Code	1053055	36080
Material	Brass	gold plated
Current [A]	xx	
Connection	Thread	

* The sum of the currents lead to a heating of the blocks due to power loss. The maximum allowed rise of this temperature is limited to 80 Kelvin.

ASSEMBLY & MAINTENANCE

FEINMETALL offers a full selection of tools and accessories designed specifically for assembly and maintenance of Contact Probes and receptacles. These tools and accessories ensure effective installation and flawless contact functionality.



Insertion tool for plugable contact probes

For inserting the probe into the receptacle tool FDWZ is helpful. After the probe is pushed into the receptacle and stopped by the pressure marks, the probe is driven into the receptacle with the FDWZ tool. The tool is made of a synthetic material to avoid any damaging of the plunger tips. Depending on the design of the contact probe, the tool can also sit on the collar of the probe.

Order code	Product name	Length [mm]	Shank Ø [mm]
1052633	FDWZ-039	67.5	A-Ø=1.0; I-Ø=0.55
1003576	FDWZ-050	100.0	1.5
1003587	FDWZ-075	100.0	2.5
1003566	FDWZ-100	100.0	3.5
1020967	FDWZ-500	100.0	A-Ø= 6.0; I-Ø= 4.1



INSERTION TOOLS

Insertion tool for receptacles with fixed stop

All receptacles with dead stop (collar) can be inserted with tool FEWZ-...E0. Press ring at receptacles can be used also as dead stop. The guiding pin of the tool helps to stabilize and properly mount the receptacle.



Insertion tool for receptacles with press ring

All receptacles with press ring can be inserted with tool FEWZ-...Ex. In this case the x is the fix height level (see picture). This value is required for ordering the correct tool. For often changing projection heights the variable tool below is recommended.



Variable insertion tool for receptacles

For different height levels of the receptacles with inserted press ring, the tool FEWZ-...EV is recommended. The required height level can be adjusted at the tool..



Order code	Product name	Pin Ø [mm]	For receptacle
1000180	FEWZ-040E0	0,63	H040
1014313	FEWZ-050E0	0,80	H050, H787
1014311	FEWZ-075E0	0,90	H075, H703, H701
1014264	FEWZ-100E0	1,30	H100, H585, H502, H708
1054103	FEWZ-109E0	0,50	H109
1003643	FEWZ-511E0	0,60	H111, H511
1005041	FEWZ-563E0	2,00	H563
1003640	FEWZ-772E0	1,60	H772
1003642	FEWZ-774E0	2,60	H774, H566

Order code	Product name	Insertion depth [mm]	For receptacle
1093953	FEWZ-111E25	2.5	H111-2.5
1018382	FEWZ-075E46	4.6	H075
1000746	FEWZ-075E65	6.5	H075
1014311	FEWZ-075E76	7.6	H075
1080358	FEWZ-100E10	1.0	H100
1014268	FEWZ-100E36	3.6	H100
1014265	FEWZ-100E46	4.6	H100
1001274	FEWZ-100E50	5.0	H100
1014602	FEWZ-100E53	5.3	H100
1014266	FEWZ-100E55	5.5	H100
1015433	FEWZ-100E67	6.7	H100
1014267	FEWZ-100E76	7.6	H100

Order code	Product name	Insertion height [mm]	For receptacle
1008393	FEWZ-050EV	0 - 10	H050; H787
1008325	FEWZ-075EV	0 - 12	H075
1008392	FEWZ-100EV	0 - 12	H100
1008394	FEWZ-772EV	0 - 10	H772

TOOLS



With the removal tool, receptacles can be removed from a bore without damaging it. This is also possible with broken receptacles or if you do not have the possibility to knock the receptacles out from the back.

Included in delivery of basic kit FZWZ-SET-001

1041981	GSFZWZ	Handle and screw nut
1006304	1VERP0048	Box for single parts
1041978	2105149	Pliers
1041979	HZ-100-01-1	Guiding sleeve
1003566	BZ-100-01-1	Thread inserts

Order code	Product name
1147833	FZWZ-SET-001

Accessories

1041981	MS300	Measuring sleeve Ø 3 mm
1041978	MS400	Measuring sleeve Ø 4 mm
1041979	MS500	Measuring sleeve Ø 5 mm
1003566	2111810	Data cable RS232

Available guiding sleeves (HZ) and thread inserts (BZ)

Combination Guiding sleeve & Thread inserts			For receptacles	
1124669	BZ-050-01-1	& 1127507	HZ-050-01-1	H720; H730, H050, H787
1030405	BZ-075-01-1	& 1030294	HZ-075-01-1	H121; H075; H175; H176; H310; H561; H701; H863
1030295	BZ-100-01-1	& 1030296	HZ-100-01-1	H722; H727; H732; H752; H756; H757; H772; H875; H878
1030297	BZ-100-02-1	& 1030296	HZ-100-01-1	H320; H610; H865
1030297	BZ-100-02-1	& 1030298	HZ-100-02-1	H100; H502; H708; H731; H751; H805
1043575	BZ-118-01-1	& 1043745	HZ-118-01-1	H563, HVF3
1030291	BZ-157-01-1	& 1030292	HZ-157-01-1	H762; H866; H867; H887
1030291	BZ-157-01-1	& 1030293	HZ-157-01-2	H723; H733; H737; H760; H761; H773; H774; H880; H881; H884; H885, HVF4


Further variants are updated on the homepage under feinmetall.com/produktfinder

FZWZ-SET-001

1031070 - Removal tool for receptacles with basic equipment

Assembly

- 01 - Handle (GSFZWZ)
- 02 - Thread insert (BZ)
- 03 - Guiding sleeve (HZ)
- 04 - Screw-nut

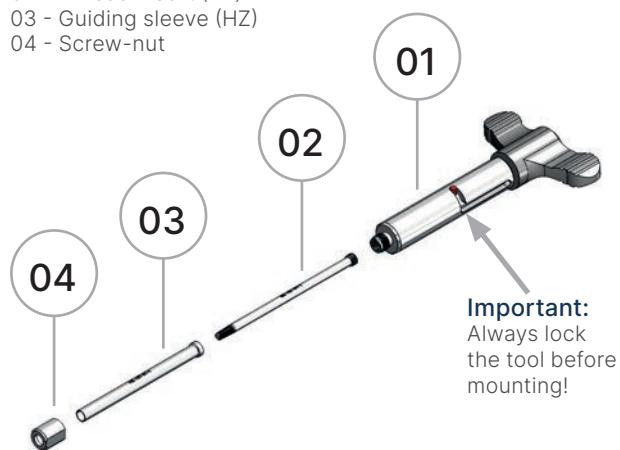

Below you will find step-by-step instructions for handling the tool.

TOOLS



The Spring Force Gauge allows force measurement at all types of spring contact probes up to 50 N.

This instrument allows in a very simple way to verify, if a probe is still intact and to determine the spring force of the probe. The measuring results are displayed at the instrument and the display can be electrically turned by 180° if needed, e.g. for overhead applications. For the measurement just put the measuring sleeve over the probe and push it to the mounting plate.

The sleeves depth can be adjusted according to the projection height of the probe. Adjustable measuring sleeves are available with three different diameters.

Technical specifications

Minimum force	3g / 0,10oz / 0,03N
Resolution	1g / 0,03oz / 0,01N
Measuring accuracy	+/- 0,5% at 25°C
Data output	via RS 232 (order code 2111810)
Power supply	6 x 1,5V AA (UM-3 batteries) (Batteries non included in delivery)

Included in delivery

1x Spring Force Gauge with receptacle for measuring sleeve
1x Measuring sleeve Ø 5,0mm
1x Calibration certificate
1x Carrying case

Accessories

1041981	MS300	Measuring sleeve Ø 3 mm
1041978	MS400	Measuring sleeve Ø 4 mm
1041979	MS500	Measuring sleeve Ø 5 mm
1003566	2111810	Data cable RS232

Order code Product name


1147834	FK50-SET-001
---------	--------------

FK50

Spring force gauge up to 50N

Series drawing

All measurements are in mm.

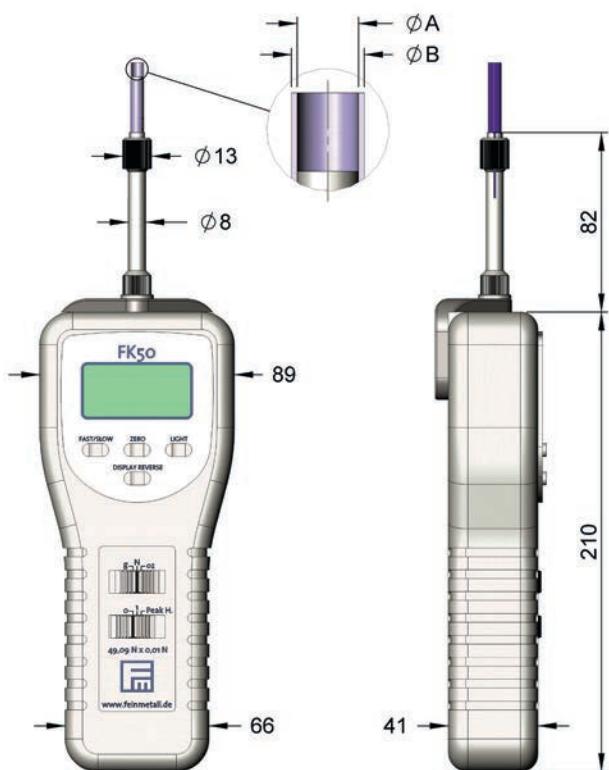


Operating manual available on request. Further rigid measuring sleeves with different diameters and fixed projection height are available on the homepage.

Example for adjustment at measuring sleeve



Projection height of probe (e.g. F732)	=	10.5 mm
Nominal travel	=	4.0 mm
Projection height - Nominal travel	=	10.5 mm - 4.0 mm
Value of height to fix	=	6.5 mm

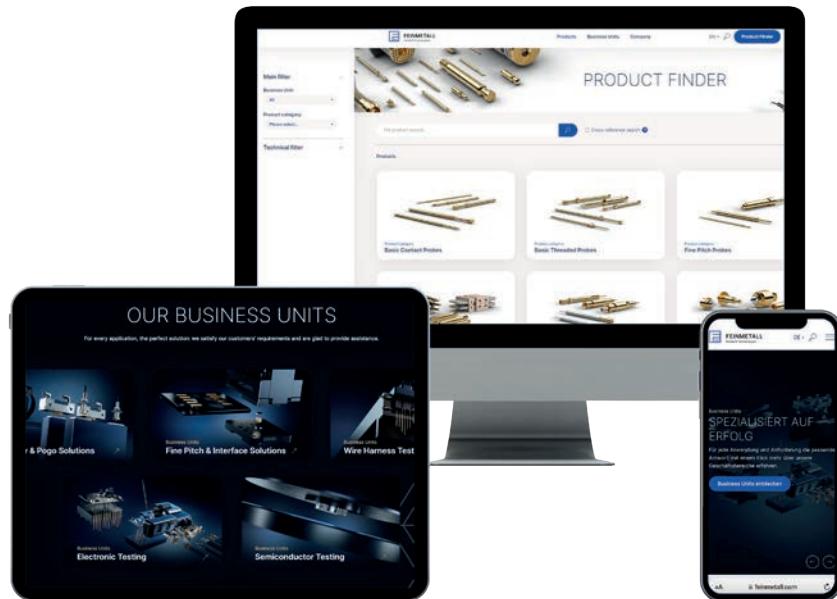

FIND US ONLINE

Our website

Welcome to the digital world of FEINMETALL. We offer you innovative contacting solutions that exceed your expectations. Visit our website at FEINMETALL.com and be inspired by the wide range of services customized to industry-specific needs. By using innovative technologies and advanced manufacturing methods, we deliver products of the highest quality and precision that can be used in various industries such as automotive, electronics, aerospace and medical. Our dedicated team is on hand to understand your requirements and help you find the best solutions to your challenges.

[> FEINMETALL.COM](http://FEINMETALL.com)



Join the community

Connect with us on LinkedIn and stay in touch with us. We take you behind the scenes at FEINMETALL and offer exciting insights into the various areas of the company. With exciting content, we stay true to our passion for precision and technology. Receive regular updates about our company, including new product launches and developments, reports on events and trade fairs, company news and more. We'll also keep you up to date on new career opportunities and job openings. Connect with us now on LinkedIn and become part of our community. Stay up to date and don't miss out on more about FEINMETALL.

[> LINKEDIN.COM/COMPANY/FEINMETALL-GMBH](https://www.linkedin.com/company/feinmetall-gmbh)



PASSION
FOR FINEST
TECHNOLOGY.

> FEINMETALL.COM



1009596 - FEINMETALL GMBH | ZEPPELINSTRASSE 8 | D-71083 HERRENBERG