

THREADED PROBES

F722

Threaded Probe 100 mil Short travel Version

Centers (mm/mil)	2,54 / 100
Contin. current	5,0 A
R typ	25 mOhm
Temperature	-45°C...+100°C

Spring Force (cN ±20%)

Version	Preload	Nominal
Standard	40	100

Travel (mm)

Version	Nominal	Maximum
Standard	1,5	2,2
Thread (M)		1,6x0,2
Wrench Size		1,7

Materials and Plating


Plunger	see Tip Style
Barrel	BeCu, gold plated
Spring	Music wire, silver plated
Receptacles	Brass, gold plated

Accessories

Insertion tool receptacle	FEWZ-100EV
Screw-in tool probe max. Tip-Ø 2,0 mm	FWZ732 (T)

Drill Size (mm)

H722LA	1,99 - 2,00
--------	-------------

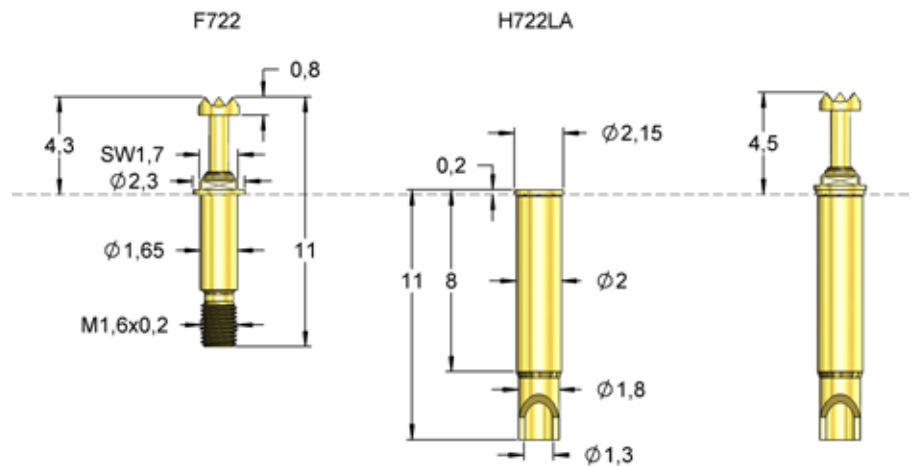

M 1:1



With its very short total length, the F722 can be used in limited spaces.

Series	Tip-Ø	Spring Force (cN)
F722 05 B 180 G 100		
Tip Style	Material	Plating
		Version

Material:	B = BeCu
Tip-Ø:	180 = 1,80 mm (e.g.)
Plating:	G = Gold plated
Receptacle:	Order code according drawing

Tip Style	Number	Material	Plating	Ø in mm	Version
	05	B	G	1,80	-
	06	B	G	1,80	-
	11	B	G	0,64	-
	11	B	G	0,85	-
	17	B	G	1,80	-