

THREADED PROBES

F723

Threaded Probe 157 mil Short Version

Centers (mm/mil)	4,00 / 157
Contin. current	10,0 A
R typ	15 mOhm
Temperature	-45°C...+200°C (H)

Spring Force (cN ±20%)

Version	Preload	Nominal
Standard	40	80
Standard	70	150

Travel (mm)

Version	Nominal	Maximum
Standard	2,8	3,5
Thread (M)		2,0
Wrench Size		3,0

Materials and Plating


Plunger	see Tip Style
Barrel	Brass, gold plated
Spring	Stainless steel, unplated
Receptacles	Brass, gold plated

Accessories

Screw-in tool probe max. Tip-Ø 3,0 mm	FWZ733S1 (T)
--	--------------

Drill Size (mm)

H723LA	2,98 - 2,99
--------	-------------

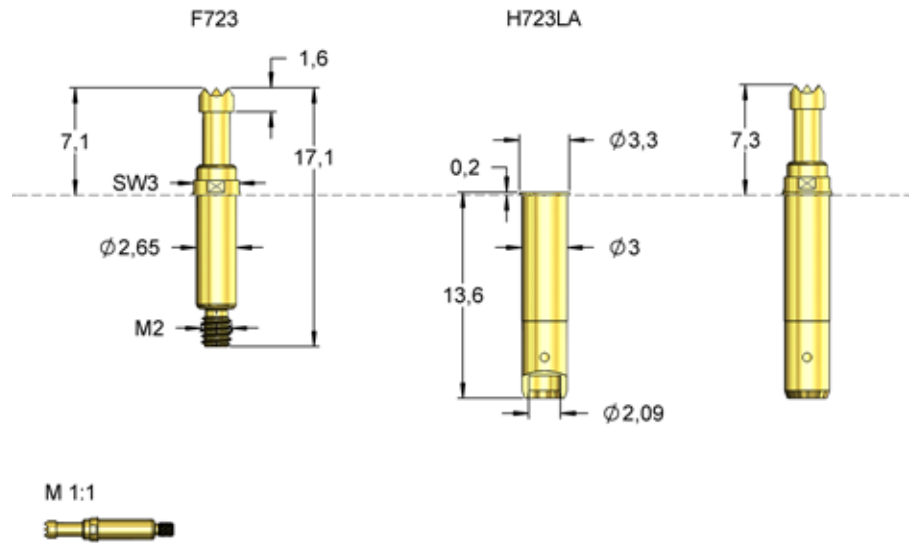

Corresponding plug-in version see F713, which is included in the catalogue for fine pitches, low heights and for direct soldering or on our homepage..

Series	Tip-Ø	Spring Force (cN)
F723	02 B 230 G	150
	Tip Style	Material
		Plating
		Version

Material:	B = BeCu
Tip-Ø:	230 = 2,30 mm (e.g.)
Plating:	G = Gold plated
Receptacle:	Order code according drawing

Tip Style	Number	Material	Plating	Ø in mm	Version
	02	B	G	2,30	-
	06	B	G	2,30	-
	12	B	G	2,30	-
	17	B	G	2,30	-