

THREADED PROBES

F727

Threaded Probe 100 mil Long Travel Version

Centers (mm/mil)	2,54 / 100
Contin. current	5,0 A
R typ	25 mOhm
Temperature	-45°C...+100°C

Spring Force (cN ±20%)

Version	Preload	Nominal
Standard	110	300

Travel (mm)

Version	Nominal	Maximum
Standard	12,0	14,5
Thread (M)		1,6
Wrench Size		1,7

Materials and Plating


Plunger	see Tip Style
Barrel	Brass, gold plated
Spring	Music wire, silver plated
Receptacles	Brass, gold plated

Accessories

Insertion tool receptacle	FEWZ-772E0
Screw-in tool probe max. Tip- \varnothing 2,0 mm	FWZ732 (T)

Drill Size (mm)

H727LARD	2,00 - 2,02
----------	-------------

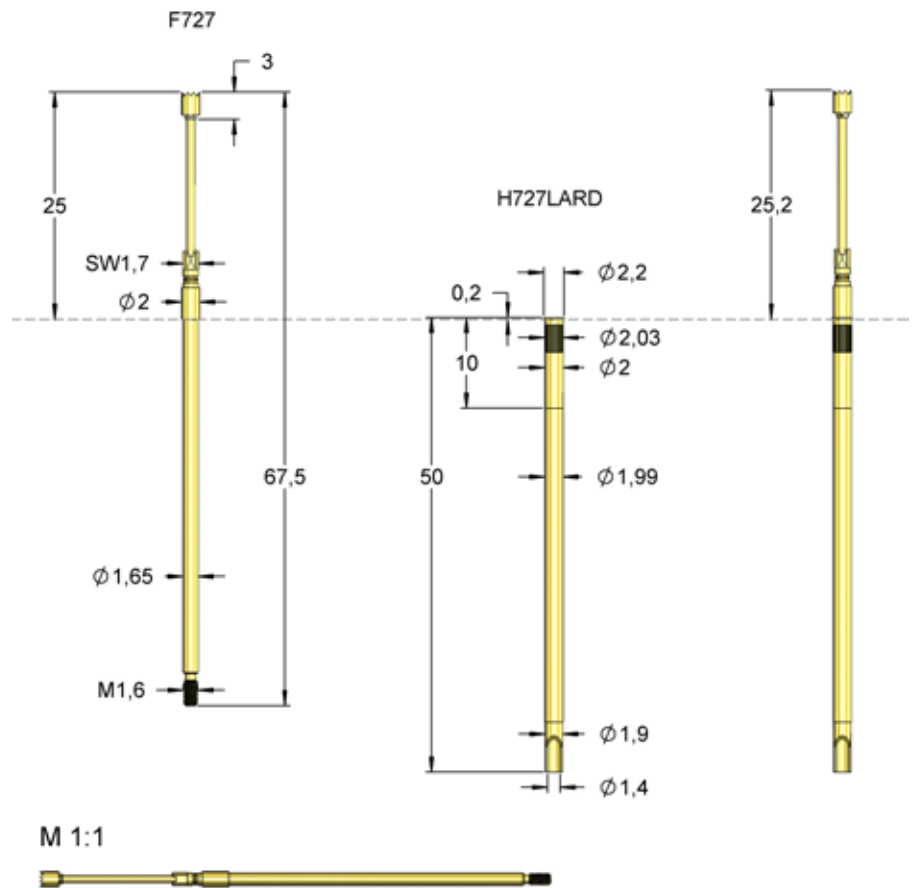

Series	Tip- \varnothing	Spring Force (cN)
F727 06 B 200 G 300		
Tip Style	Material	Plating
Version		

Material:	B = BeCu
Tip-\varnothing:	200 = 2,00 mm (e.g.)
Plating:	G = Gold plated
Receptacle:	Order code according drawing

Tip Style	Number	Material	Plating	\varnothing in mm	Version
	06	B	G	2,00	-
	15	B	G	2,00	-