

F732SP

Step Probe 100 mil

Centers (mm/mil)	2,54 / 100
Contin. current	5,0 A
R typ	20 mOhm
Temperature	-45°C...+100°C

Spring Force (cN ±20%)

Version	Preload	Nominal
SP	30	80
SP	50	100
SP (1)	60	150
SP (1)	60	300

Travel (mm)


Version	Nominal	Maximum
SP (1)	4,0	5,0
Thread (M)		1,6
Wrench Size		1,7

Materials and Plating

Plunger	BeCu, gold plated
Barrel	Brass, gold plated
Spring	Music wire, silver plated
Receptacles	Brass, gold plated

Accessories

Insertion tool receptacle	FEWZ-772Eo
---------------------------	------------

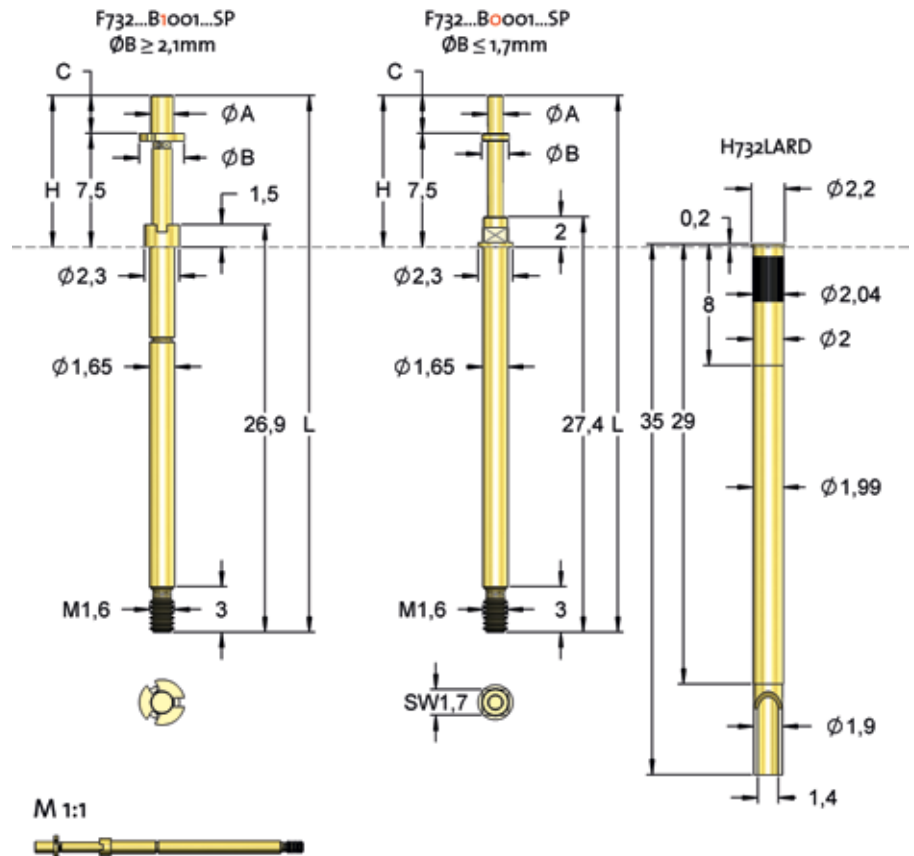

Order Code	Ø A	Tip Style	C	Ø B	H	L	Version	Screw-in tool
F73211B0045G150SP	0,64	11	3,0	1,5	10,5	35,9	SP	FWZ732 (T)
F73211B1041G150SP	0,65	11	2,5	2,1	10,0	35,4	SP	FWZ732SP (T)
F73211B0029G150SP	0,65	11	2,7	1,5	10,2	35,6	SP	FWZ732 (T)
F73211B0048G150SP	0,65	11	3,0	1,0	10,5	35,9	SP	FWZ732 (T)
F73211B1054G150SP	0,65	11	3,0	2,1	10,5	35,9	SP	FWZ732SP (T)
F73211B1051G150SP	0,65	11	3,4	2,1	10,9	36,3	SP	FWZ732SP (T)
F73211B0053G150SP	0,65	11	3,6	1,7	11,1	36,5	SP	FWZ732 (T)
F73211B1042G150SP	0,65	11	3,6	2,1	11,1	36,5	SP	FWZ732SP (T)
F73211B0073G150SP	0,65	11	4,0	1,5	11,5	36,9	SP	FWZ732 (T)
F73211B0024G150SP	0,65	11	4,3	1,5	11,8	37,2	SP	FWZ732 (T)
F73211B0052G150SP	0,65	11	4,7	1,7	12,2	37,6	SP	FWZ732 (T)
F73211B0084G300SP	0,80	11	3,5	1,8	11,0	36,4	SP	FWZ732 (T)
F73211B0036G300SP	0,80	11	4,0	1,8	11,5	36,9	SP	FWZ732 (T)
F73211B1036G150SP	0,80	11	4,0	2,1	11,5	36,9	SP	FWZ732SP (T)
F73211B1006G150SP	0,80	11	4,0	2,5	11,5	36,9	SP	FWZ732SP (T)
F73211B0086G300SP	0,80	11	5,0	1,8	12,5	37,9	SP	FWZ732 (T)
F73216B1038G150SP	1,00	16	2,0	2,1	9,5	34,9	SP	FWZ732SP (T)
F73216B1046G150SP	1,00	16	2,5	2,1	10,0	35,4	SP	FWZ732SP (T)
F73216B1015G150SP	1,50	16	2,0	3,5	9,5	34,9	SP	FWZ732SP (T)
F73216B1014G150SP	1,50	16	2,5	3,0	10,0	35,4	SP	FWZ732SP (T)

Further variants see our homepage.