

F733SP

Step Probe 157 mil

Centers (mm/mil)	4,00 / 157
Contin. current	10,0 A
R typ	25 mOhm
Temperature	-45°C...+100°C

Spring Force (cN ±20%)

Version	Preload	Nominal
SP (1)	50	150
SP (1)	50	300

Travel (mm)


Version	Nominal	Maximum
SP (1)	4,0	5,0
Thread (M)		2,0
Wrench Size		3,0

Materials and Plating

Plunger	BeCu, gold plated
Barrel	Brass, gold plated
Spring	Music wire, silver plated
Receptacles	Brass, gold plated

Accessories

Insertion tool receptacle	FEWZ-774E0
---------------------------	------------

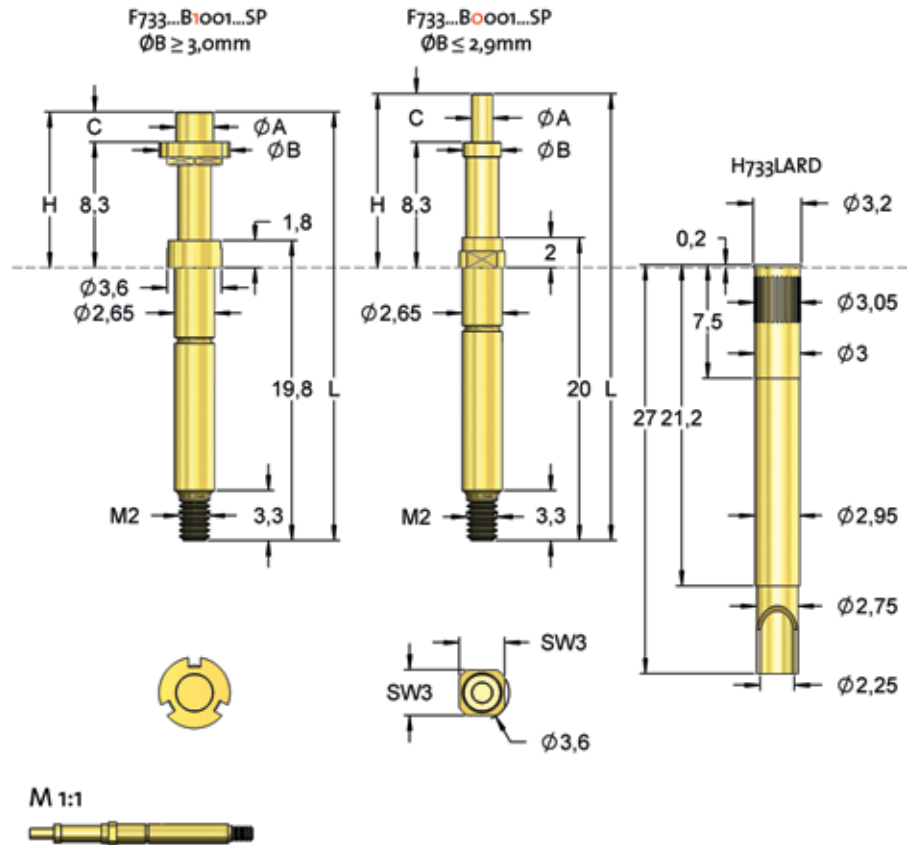

As a long travel solution we offer the F737SP on our homepage.

Order Code	ΦA	Tip Style	C	ΦB	H	L	Version	Screw-in tool
F73316B1005G150SP	1,30	16	2,7	4,7	11,0	29,0	SP	FWZ733SP (T)
F73316B1002G150SP	1,30	16	5,3	4,7	13,6	31,6	SP	FWZ733SP (T)
F73311B1027G150SP1	1,40	11	2,4	3,5	10,7	28,7	SP1	FWZ732SP1 (T)
F73311B1035G150SP1	1,40	11	2,7	3,5	11,0	29,0	SP1	FWZ732SP1 (T)
F73316B1031G150SP1	1,40	16	1,7	3,5	10,0	28,0	SP1	FWZ732SP1 (T)
F73316B1016G150SP1	1,40	16	2,0	3,5	10,3	28,3	SP1	FWZ732SP1 (T)
F73316B1027G150SP1	1,40	16	2,4	3,5	10,7	28,7	SP1	FWZ732SP1 (T)
F73316B1032G150SP1	1,40	16	3,0	3,5	11,3	29,3	SP1	FWZ732SP1 (T)
F73316B0060G300SP	1,50	16	1,5	3,0	9,8	27,8	SP	FWZ733S1 (T)
F73316B0061G300SP	1,50	16	2,0	3,0	10,3	28,3	SP	FWZ733S1 (T)
F73316B0062G300SP	1,50	16	2,5	3,0	10,8	28,8	SP	FWZ733S1 (T)
F73316B0063G300SP	1,50	16	3,0	3,0	11,3	29,3	SP	FWZ733S1 (T)
F73316B0064G300SP	1,50	16	3,5	3,0	11,8	29,8	SP	FWZ733S1 (T)
F73316B0066G300SP	1,50	16	4,5	3,0	12,8	30,8	SP	FWZ733S1 (T)
F73316B1036G150SP1	1,80	16	1,6	3,5	9,9	27,9	SP1	FWZ732SP1 (T)
F73316B1015G150SP1	1,80	16	2,2	3,5	10,5	28,5	SP1	FWZ732SP1 (T)
F73316B1009G150SP	1,80	16	4,2	4,7	12,5	30,5	SP	FWZ733SP (T)
F73316B1075G300SP1	2,00	16	2,0	4,0	10,3	28,3	SP1	FWZ732SP1 (T)
F73316B1077G300SP1	2,00	16	3,0	4,0	11,3	29,3	SP1	FWZ732SP1 (T)
F73316B1043G150SP1	2,20	16	2,0	3,5	10,3	28,3	SP1	FWZ732SP1 (T)

Further variants see our homepage.