

PUSH BACK PROBES

V03

Push Back Probe 118 mil Plug-In with Switch Function

Centers (mm/mil)	3,00 / 118
Contin. current	8,0 A
Current (Switch)	1,0 A
R typ	30 mOhm
Temperature	-45°C...+100°C

Spring Force (cN ±20%)

Version	Preload	Nominal
Standard	300	1500

Travel (mm)


Version	Nominal	Maximum
Standard	5,0	6,0
Switch Travel (mm)		3,5
Wrench Size		2,2

Materials and Plating


Plunger	see Tip Style
Barrel	Brass, gold plated
Spring	Music wire, gold plated
Receptacles	-

Drill Size (mm)

V03	2,50 - 2,52
-----	-------------

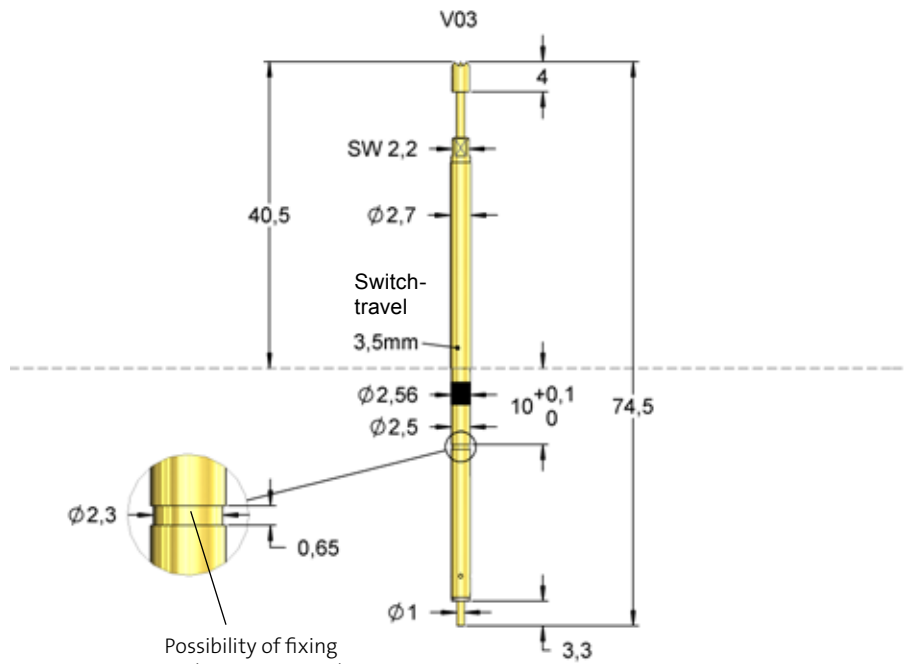

M 1:1

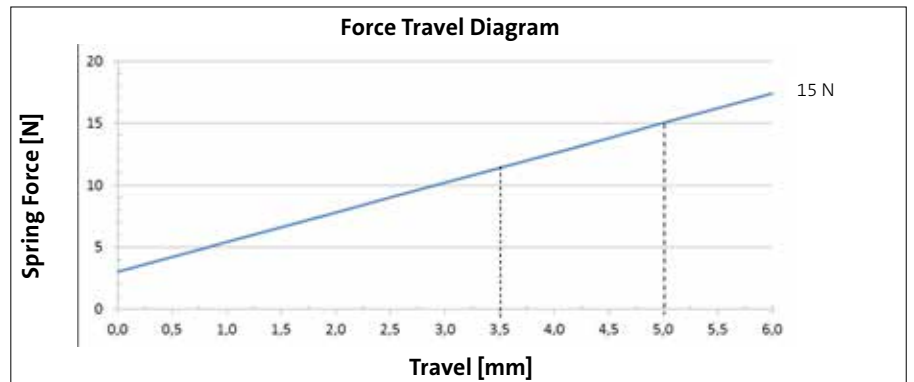

Series	Tip-Ø	Spring Force (N)
V03	06	15
	B	G
	230	

Material:	B = BeCu
Tip-Ø:	230 = 2,3 mm (e.g.)
Plating:	G = Gold plated

Tip Style	Number	Material	Plating	Ø in mm	Version
	06	B	G	2,30	-
	17	B	G	2,30	-