

## FP732

### Threaded Probe 100 mil, Long Travel Flying Probe for Skorpion Tester

<b>Centers (mm/mil)</b>	3,00 / 118
<b>Current</b>	5,0 A
<b>R typ</b>	20 mOhm
<b>Temperature</b>	-20°C...+80°C

#### Spring Force (cN ±20%)

Version	Preload	Nominal
Standard	50	150

#### Travel (mm)

Version	Nominal	Maximum
Standard	6,4	8,0
Thread (M)		1,6
Wrench Size		2,0
Pointing Accuracy		±0,10 mm

#### Materials and Plating

Plunger	see tip style
Barrel	Brass, gold plated
Spring	Music wire, gold plated
Receptacle	Brass, gold plated

#### Accessories


Insertion tool receptacle	FEWZ-772E0
Screw-in tool probe	FWZVF3S2 (T2)

#### Drill size (mm)

H732LARD	2,00 - 2,02
----------	-------------


#### Projection Height (mm)

H732LARD	19,8
H732LARD/5	24,6

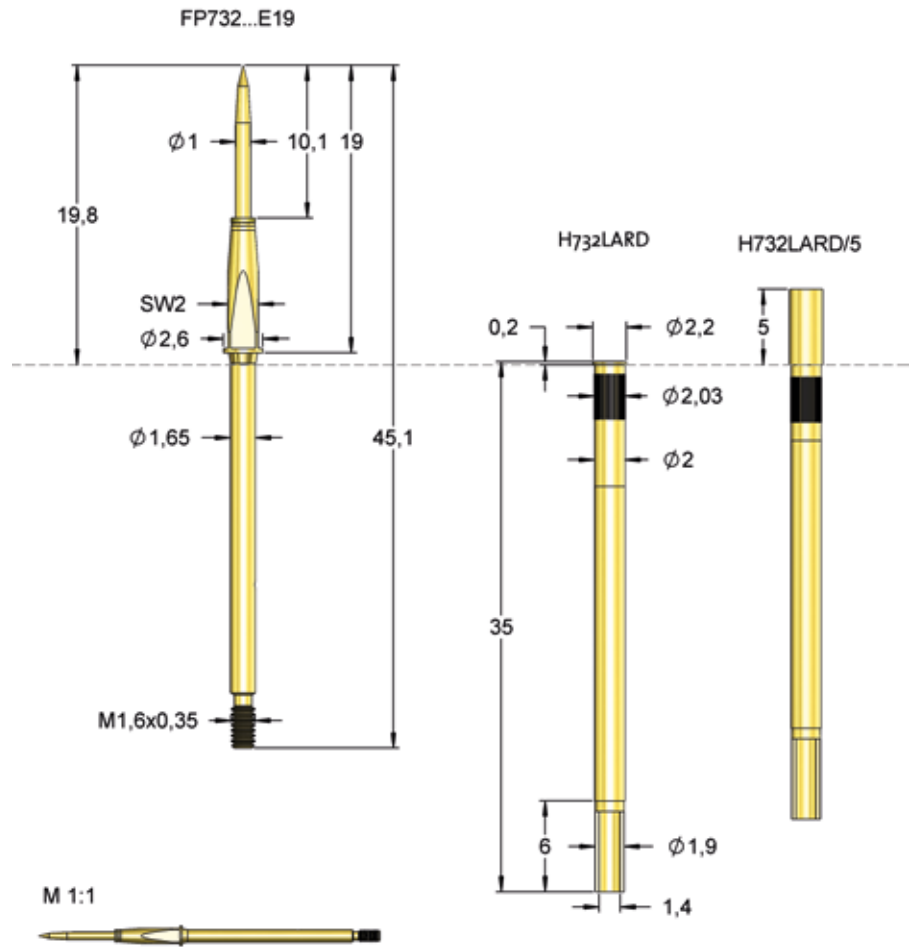

Series	Tip-Ø	Spring Force (cN)
<b>FP732 18 S 100 L 150 E19</b>		
Tip Style	Material	Plating
		Version

<b>Material:</b>	S = Steel
<b>Tip-Ø:</b>	100 = 1,00 mm (e.g.)
<b>Plating:</b>	L = Longtime Gold plated
<b>Receptacle:</b>	Order Code according drawing

Tip Style	Number	Material	Plating	Ø in mm	Version
	18	S	L	1,00	E19